


# 3-way insulated shunt suitable for pipes from 150 to 400 mm

- cod. PWC500007 - cod. PWC500008 - cod. PWC500009  
- cod. PWC500010 - cod. PWC500011



## TECHNICAL SPECIFICATIONS:

- Material: PP
- Insulating coating: polyethylene with aluminium coating
- Operating temperature: 0°C to +70°C
- For flexible heating and air conditioning pipes (insulated or not)
- Available accessories: insulated reducers

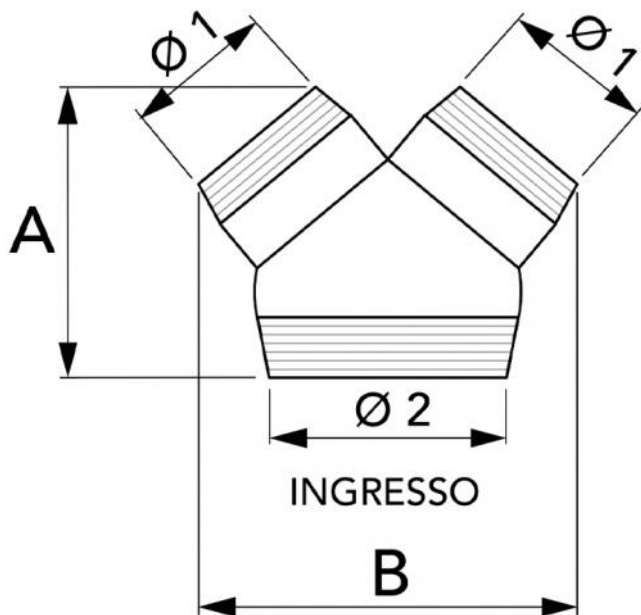

## DIMENSIONS

CODE	Ø 2 [mm]	Ø 1 [mm]	A [mm]	B [mm]
PWC500007	200	150	250	345
PWC500008	250	200	300	400
PWC500009	300	250	350	450
PWC500010	350	300	390	500
PWC500011	400	350	445	590

## ITEMS

CODE	DESCRIPTION
PWC500007	THREE-WAY INSULATED BRANCH 200 x 150 x 150
PWC500008	THREE-WAY INSULATED BRANCH 250 x 200 x 200
PWC500009	THREE-WAY INSULATED BRANCH 300 x 250 x 250
PWC500010	THREE-WAY INSULATED BRANCH 350 x 300 x 300
PWC500011	THREE-WAY INSULATED BRANCH 400 x 350 x 350

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.