


Insulated reduction for 3-way insulated shunts

- cod. PWC500013 - cod. PWC500014 - cod. PWC500015
- cod. PWC500016



TECHNICAL SPECIFICATIONS:

- Made of n PP
- Insulating coating: polyethylene with aluminium coating
- Operating temperature: 0°C to +70°C
- Only in combination with the 3-way insulated branch outlets
- For flexible heating and air conditioning pipes (insulated or not)

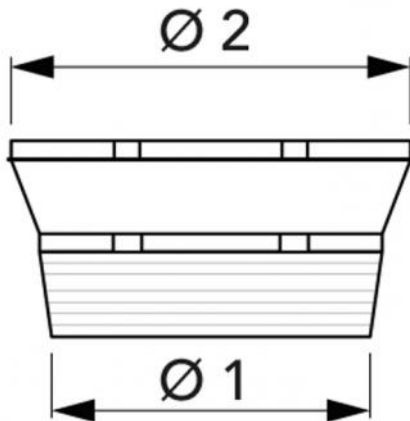

DIMENSIONS

CODE	PIPE COUPLER Ø 1 [mm]	SHUNT COUPLER Ø 2 [mm]
PWC500013	150	200
PWC500014	200	250
PWC500015	250	300
PWC500016	300	350

ITEMS

CODE	DESCRIPTION
PWC500013	INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 200 mm TO Ø 150 mm
PWC500014	INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 250 mm TO Ø 200 mm
PWC500015	INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 300 mm TO Ø 250 mm
PWC500016	INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 350 mm TO Ø 300 mm

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.