

Spiral metallic rigid circular duct

- cod. 31500020 - cod. 31500030 - cod. 31500040
- cod. 31500050 - cod. 31500060 - cod. 31500062
- cod. PWC400001 - cod. 31500064 - cod. 31500066




TECHNICAL SPECIFICATIONS:

- Pipe length 3 m
- Made of galvanized steel
- Accessories complete with double lip EPDM gasket
- Sealing class C (UNI EN12237:2003 standard)
- Temperatures from -30°C to +100°C
- Without reinforcement ribs up to 280
- With reinforcement ribs of 300 Ø

DESCRIPTION


Circular duct with spiral crimping in galvanised steel sheet.

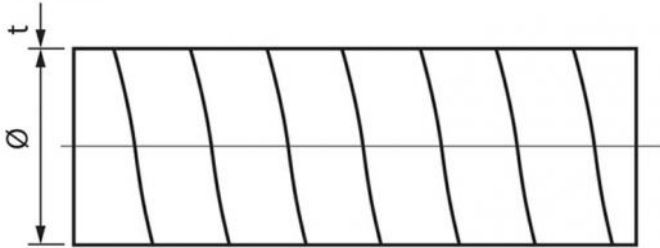

DIMENSIONS

CODE	Ø [mm]	t [mm]	WEIGHT [kg]
31500020	100	0,5	1,38
31500030	125	0,5	1,73
31500040	160	0,5	2,21
31500050	200	0,5	2,77
31500060	250	0,6	4,31
31500062	300	0,6	5,18
PWC400001	315	0,6	5,44
31500064	355	0,6	6,13
31500066	400	0,8	9,21

LOAD LOSS DIAGRAM

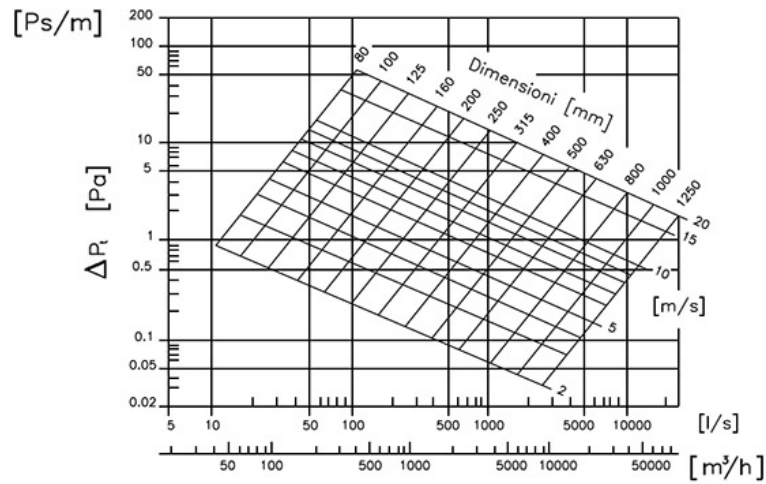

ITEMS

CODE	DESCRIPTION
31500020	CIRCULAR RIGID SPIRAL METAL DUCT Ø 100
31500030	CIRCULAR RIGID SPIRAL METAL DUCT Ø 125
31500040	CIRCULAR RIGID SPIRAL METAL DUCT Ø 160
31500050	CIRCULAR RIGID METAL DUCT Ø 200
31500060	CIRCULAR RIGID METAL DUCT Ø 250
31500062	CIRCULAR RIGID METAL DUCT Ø 300
PWC400001	CIRCULAR RIGID METAL DUCT Ø 315
31500064	CIRCULAR RIGID METAL DUCT Ø 355
31500066	CIRCULAR RIGID METAL DUCT Ø 400

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.