


Nipple M / M

- cod. 26002500 - cod. 26002510 - cod. 26002520
- cod. 26002530 - cod. 26002540 - cod. 26002550
- cod. 26002560 - cod. 26002570 - cod. 26002580



TECHNICAL SPECIFICATIONS:

- Maximum operating temperature +130°C
- Application in hydraulics
- Gas thread

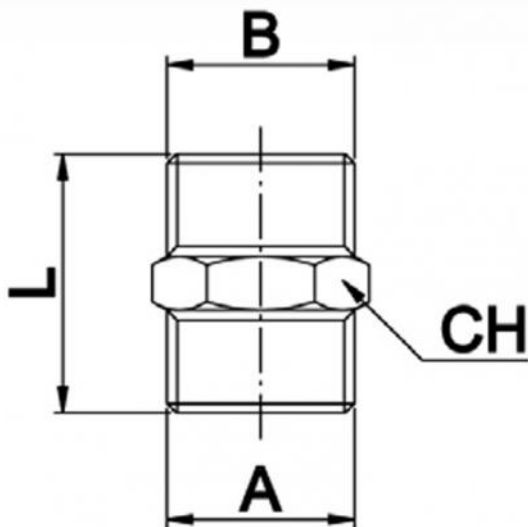

DIMENSIONS

| CODE | A | B | CH | L [mm] |
|----------|------|--------|------|--------|
| 26002500 | | 3/8" | 17 | 27 |
| 26002510 | | 1/2" | 21 | 29 |
| 26002520 | | 3/4" | 26 | 30 |
| 26002530 | | 1" | 34 | 39 |
| 26002540 | 3/8" | 1/2" | 21 | 28 |
| 26002550 | 1/2" | 3/4" | 26 | 26,5 |
| 26002560 | 3/4" | 1" | 35 | 39 |
| 26002570 | | 1" 1/4 | 43,2 | 44,8 |
| 26002580 | | 1" 1/2 | 48,6 | 41,8 |

ITEMS

| CODE | DESCRIPTION |
|----------|--|
| 26002500 | |
| 26002510 | NIPPLE 1/2" (PACK. 10 PCS.) |
| 26002520 | NIPPLE 3/4" (PACK. 10 PCS.) |
| 26002530 | NIPPLE 1" (PACK. 10 PCS.) |
| 26002540 | |
| 26002550 | REDUCED NIPPLE 1/2"-3/4" (PACK OF 10 PCS.) |
| 26002560 | |
| 26002570 | |
| 26002580 | NIPPLE 1"1/2 |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.