

Humidity sensor for TS-HRVU / TS-ERVU

- cod. ACD200078



DESCRIPTION

The HRVU MVHR control is a device for measuring air quality in a residential environment. The device measures the internal humidity and sends the data via RF to the ventilation unit. The ventilation unit activates ventilation according to the set operating mode.


TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	
Dimensions [mm]	100x100x25 mm
Weight	±125 g
Operating temperature	0°C ÷ 40°C
Storage and shipping temperature	-20°C - 55°C
Relative humidity	0-90% (without condensation)
Protection rating	IP30
Battery type	2x AA
Battery life	2 years
Wireless connection frequency	868.3 MHz
Wireless connection power	at least 0 dBm (*)
Relative humidity measurement range	0-100% RH
Relative humidity measurement accuracy	3% RH (at 11-89% RH) - 7% RH (at 0-10% and 90-100%)
Resolution of relative humidity measurement	1% RH
Stability of relative humidity measurement	1.5% RH over 5 years


(*) It is not permitted to use the device outside of Europe.

REFERENCES

1. Touch button
2. Operating mode LED
3. Status LED

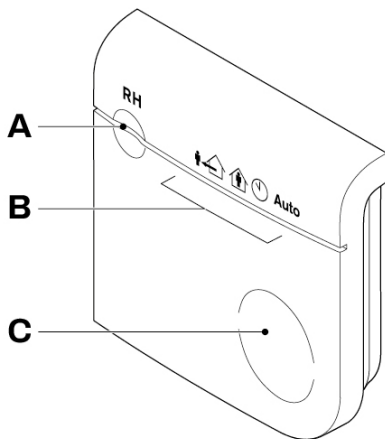

OPERATING MODE

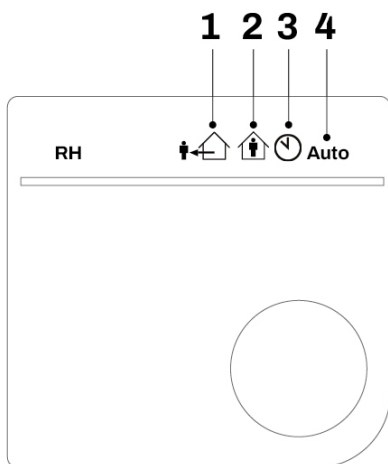

1. Reduced speed: this function is ideal for keeping the environment healthy when not in use.
2. Minimum speed: this function ensures minimum air recirculation under normal operating conditions.
3. Timer Maximum speed: this function has a limited duration of 30 min. and is used in extreme conditions to force recirculation at maximum air speed.
4. Automatic: this function adjusts the speed from the minimum to the maximum, based on the detected humidity values.

ITEMS

CODE	DESCRIPTION
ACD200078	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.