

WINDOW


electric extractor

- cod. 11104034 - cod. 11104035



TECHNICAL SPECIFICATIONS:

- Made of ABS
- Automatic flap opening
- Recommended for extracting air from kitchens, shops, offices and restaurants
- Ideal for mounting on windows or glazing
- Equipped with adjustable timer option from 2 to 30 minutes

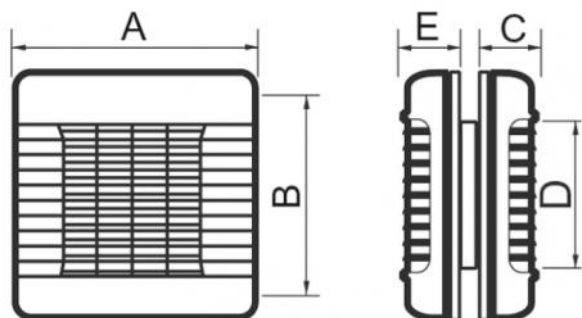

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
11104034	WINDOW Ø 125	190	173	53	125	58
11104035	WINDOW Ø 150	212	195	60	150	66

TECHNICAL DATA

TECHNICAL SPECIFICATIONS	Ø 125	Ø 150
Power supply [V]	230	230
Frequency [Hz]	50	50
Power [W]	22	26
Absorbed current [A]	0,100	0,130
Air flow rate [m³/h]	185	295
Air pressure [Pa]	55	80
Max sound level [dB(A)]	35	41
SPEED [RPM]	2400	2400
Weight [kg]	1,15	1,53

ITEMS

CODE	DESCRIPTION
11104034	"WINDOW" ELECTRIC EXTRACTOR, Ø125
11104035	"WINDOW" ELECTRIC EXTRACTOR, Ø150

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.