


Pack of 3 flexible hoses with 45° ball valves for gas TR422ABCD (R22) - R407C - R410A - R32

- cod. 11132026 - cod. 11132027 - cod. 11132119

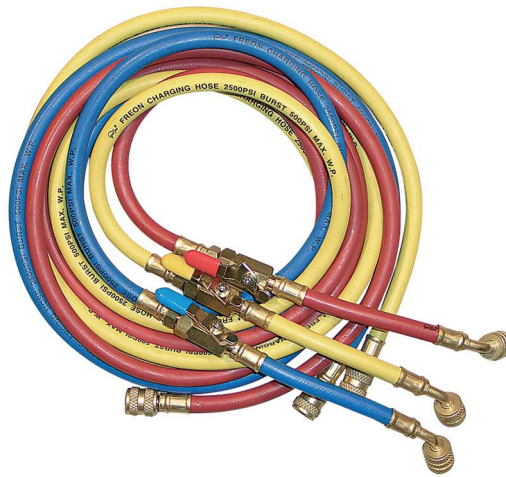

TECHNICAL SPECIFICATIONS:

- Max operating pressure: 500 psi/45 bar (for gas TR422ABCD (R22) - R407C)
- Max operating pressure: 800 psi / 55 bar (for gas R410A - R32)
- Max length 1500 or 3000 mm
- 1/4" SAE x 1/4 SAE 45° yellow/red/blue pipe (for gas TR422ABCD (R22) - R407C)
- 1/4" SAE x 5/16" SAE 45° red/blue pipe (for gas R410A/R32) 1/4" SAE x 1/4 SAE 45° yellow (for gas R410A/R32)

DIMENSIONS

CODE	LENGTH [mm]
11132026	1500
11132027	1500
11132119	3000

ITEMS

CODE	DESCRIPTION
11132026	FLEXIBLE HOSES WITH SHUT OFF VALVE FOR GAS R407C/R22(mm.1500)
11132027	FLEXIBLE HOSES WITH SHUT OFF VALVE FOR GAS R410A (mm.1500)
11132119	FLEXIBLE HOSES WITH SHUT OFF VALVE FOR GAS R410A(mm.3000)

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.