


## DE.CS

dehumidifier for ductable ceiling

- cod. ACC400027 - cod. ACC400028







**DIMENSIONS mod. ACC400027**

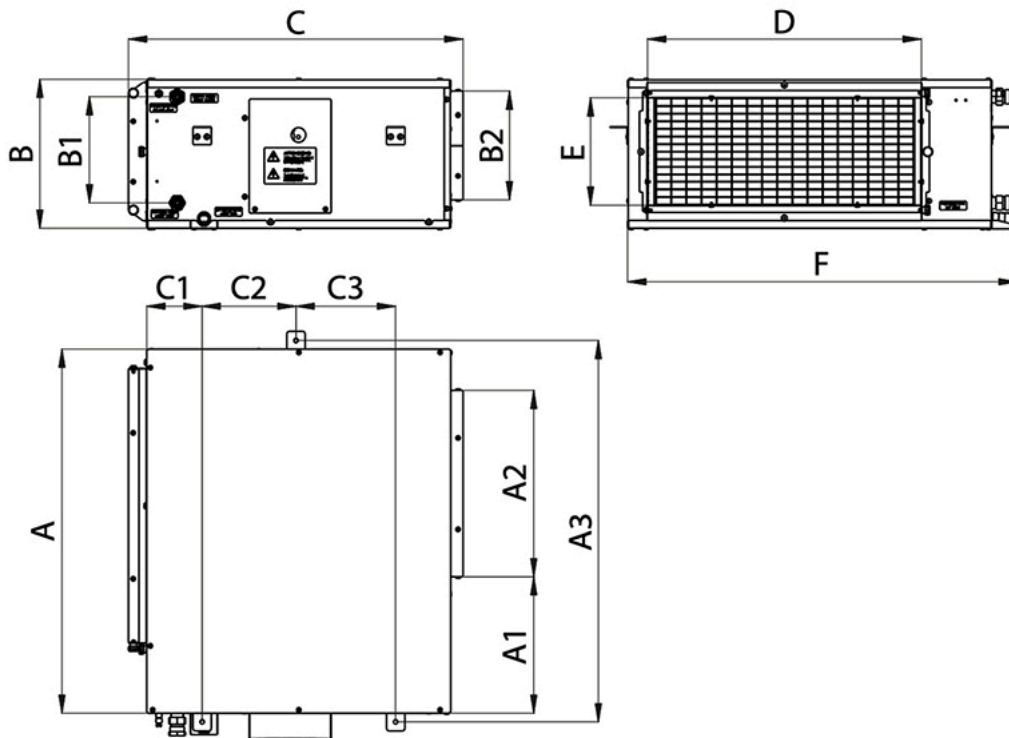

**DIMENSIONS mod. ACC400027**

CODE	A [mm]	A1 [mm]	A2 [mm]	B [mm]	C [mm]	C1 [mm]	C2 [mm]	D [mm]	E [mm]
ACC400027	640	627	306	245	550	318	164	450	177

**DIMENSIONS mod. ACC400028**

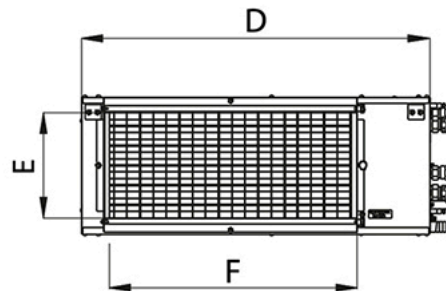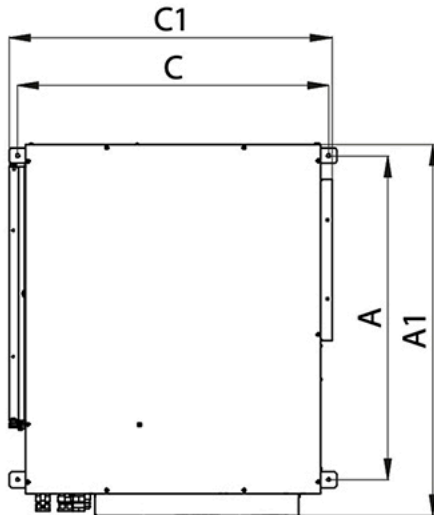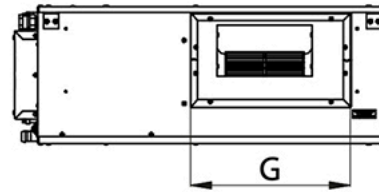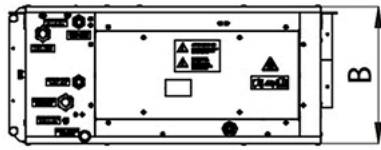

**DIMENSIONS mod. ACC400028**

CODE	A [mm]	A1 [mm]	A2 [mm]	B [mm]	C [mm]	C1 [mm]	C2 [mm]	D [mm]	E [mm]
ACC400028	707	616	304	260	614	592		472	201

## TECHNICAL DATA

SPECIFICATIONS	cod. ACC400027	cod. ACC400028
Power supply [V]	230	
Power supply [Ph]	1	
Power supply [Hz]	50	
Maximum electrical power input [W]	260	520
Electrical power input of the fan [W]	30	37
Total water flow rate [l/h]	240	420
Pre-cooling water flow rate [l/h]		350
Water circuit pressure drop [kPa]	11	20
Air flow rate [m³/h]	200	350
Available pressure (factory configuration) [Pa]	15	10
Sound power level during dehumidification (factory configuration) [dB(A)]	41	53
Fan	Centrifugo a doppia aspirazione, a 3 velocità	Centrifugo a doppia aspirazione, a 5 velocità
Air Filter	Class G3 (EN 779:2002)	
Operating range	from 15°C to 30°C	
Safety	Control of inlet water temperature, evaporator, condenser, LED, and alarm signal relay	
Refrigerant (R290) [gr]	95	105
Weight [kg]	29	32

### Acoustic Data mod. ACC400027

SOUND POWER LEVEL db(A)	Speed 1	Speed 2	Speed 3
Ventilation	39,6	41,4	46,2
Dehumidification	46	47,5	49,2

### Acoustic Data mod. ACC400028

SOUND POWER LEVEL db(A)	Speed 5	Speed 4	Speed 3	Speed 2	Speed 1
Ventilation	39,6		41,4	46,2	50,4
Dehumidification	47		48,5	50,2	52,2

## ITEMS

CODE	DESCRIPTION
ACC400027	
ACC400028	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.