


Aluminium panel in PAL polyurethane foam for ducts and plenum

- cod. 50000000 - cod. 50000001 - cod. 50000002
- cod. 50000003 - cod. 50000005 - cod. 50000006
- cod. 50000056 - cod. 50000058 - cod. 50000060
- cod. 50000062 - cod. 50000004

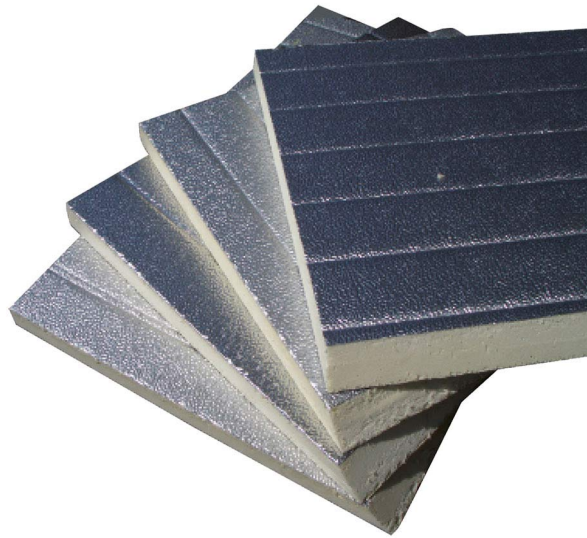

TECHNICAL SPECIFICATIONS:

- Coated on both sides with 80 µm thick embossed aluminium
- Material thickness 20 mm
- Density 49 kg/m³
- Reaction to fire class: B-s3,d0
- Temperature: -30°C to +80°C

DIMENSIONS

CODE	LENGTH [mm]	WIDTH [mm]	THICKNESS [mm]	NO.OF CUTS
50000000	3000	150	20	2 TG x 45°
50000001	3000	200	20	2 TG x 45°
50000002	3000	250	20	2 TG x 45°
50000003	3000	300	20	2 TG x 45°
50000005	3000	400	20	2 TG x 45°
50000006	3000	500	20	2 TG x 45°
50000056	3000	600	20	2 TG x 45°
50000058	3000	800	20	2 TG x 45°
50000060	3000	1000	20	2 TG x 45°
50000062	3000	1200	20	2 TG x 45°
50000004	3000	300	20	1 TG x 45°

ITEMS

CODE	DESCRIPTION
50000000	PLÉNUMS 3000 x 150 x 20 mm
50000001	PLÉNUMS 3000 x 200 x 20 mm
50000002	PLÉNUMS 3000 x 250 x 20 mm
50000003	PLÉNUMS 3000 x 300 x 20 mm
50000005	PLÉNUMS 3000 x 400 x 20 mm
50000006	PLÉNUMS 3000 x 500 x 20 mm
50000056	PLÉNUMS 3000 x 600 x 20 mm
50000058	PLÉNUMS 3000 x 800 x 20 mm
50000060	PLÉNUMS 3000 x 1000 x 20 mm
50000062	PLÉNUMS 3000 x 1200 x 20 mm
50000004	PLÉNUMS 3000 x 300 x 20 mm

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.