

OPTIMA RL

in-line connection for Excellens and Optima duct

- cod. SCD100142 - cod. SCD100143




TECHNICAL SPECIFICATIONS:

- High impact resistance plastic, recyclable
- Innovative design
- Ultra-fast interlocking fastening system
- Large outer flange
- Hole covers
- Extremely high outer finish
- Heat shrink barcode packaging
- Paintable with light-colored paints
- Operating temperature -20°C / +60°C
- Coloured operating temperature -20°C / +75°C

MODELS AVAILABLE:



WHITE

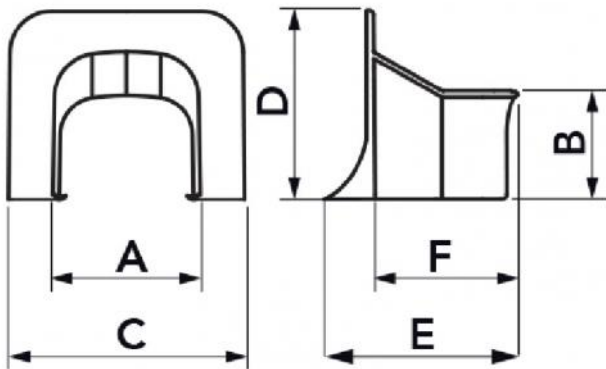

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
SCD100142	RLO 35 - OPT	35	28	52	37		42
SCD100143	RLE 35 - OPT	35	28	52	37	55	

ITEMS

CODE	DESCRIPTION
SCD100142	"OPTIMA RL" LINEAR COUPLING LINE FITTING FOR EXCELLENS AND OPTIMA TRUNKING - WHITE - RLO35-OPT
SCD100143	"OPTIMA RL" LINEAR COUPLING LINE FITTING FOR EXCELLENS AND OPTIMA TRUNKING - WHITE - RLE35-OPT

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.