


Oval air inlet flexible hose


- cod. 30101010

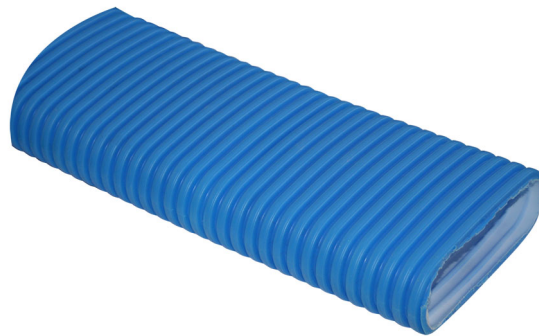

TECHNICAL SPECIFICATIONS:


- Double-walled HDPE corrugated hose
- Weight 10,5 kg
- Maximum flow rate: 55 m³/h
- Operating temperature -25/+80°C
- Reaction to fire class according to EN13501-1: E
- Minimum bending radius: 265 mm
- Resistance to external pressure according to EN 17192: 27.6 N
- Self-extinguishing treatment
- Anti-UV
- Antistatic
- Sub-track installation

DIMENSIONS

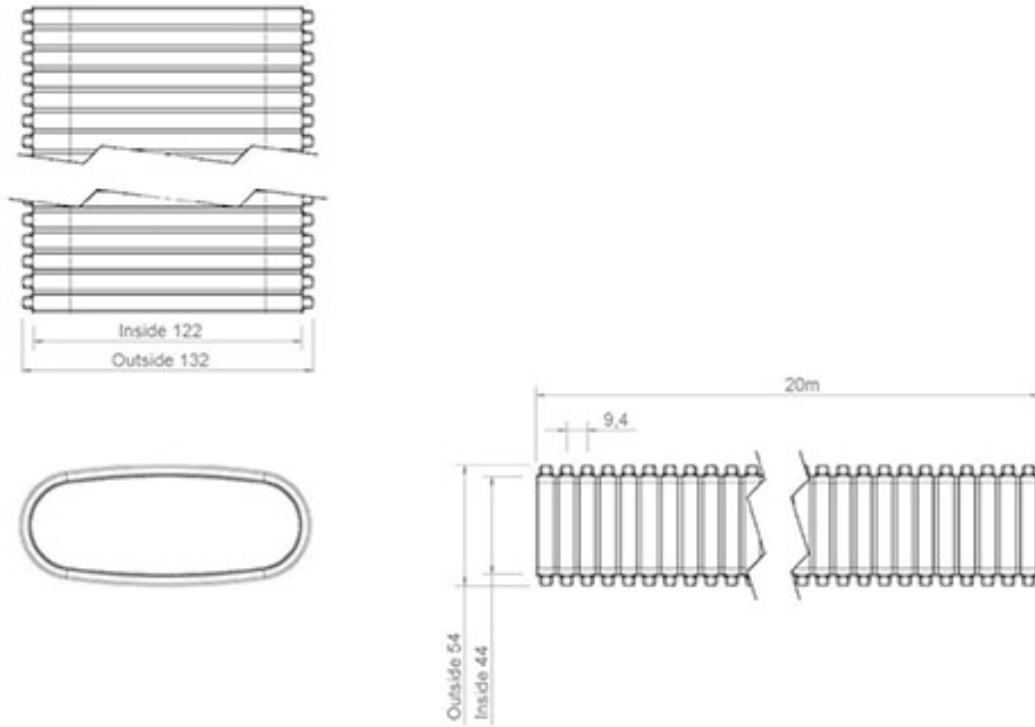

CODE	LENGTH [m]	WIDTH [m]	HEIGHT [m]
30101010	20	122	44

PRESSURE LOSSES

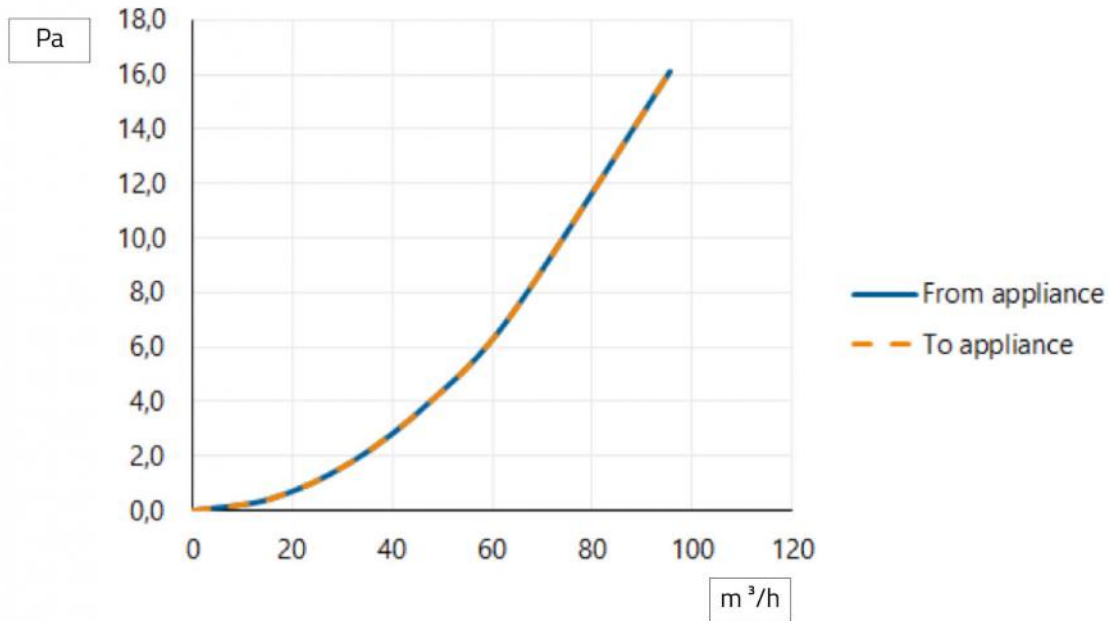

ITEMS

CODE	DESCRIPTION
30101010	OVAL FLEXIBLE HOSE FOR AIR INLET 120X35

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.