
GALAXY®


Multi - Zone
Air Control System


wi-fi


Tecnosystemi



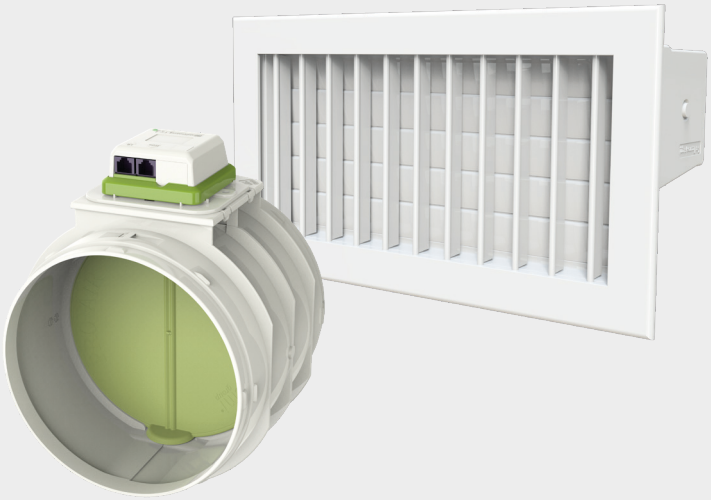

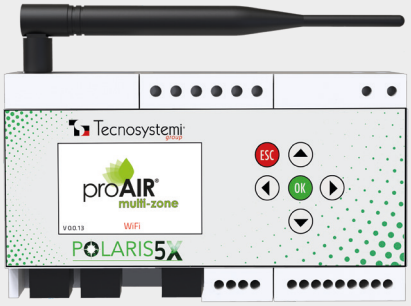

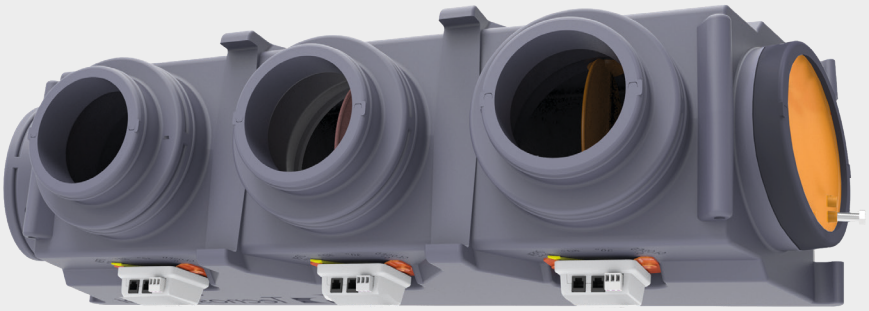

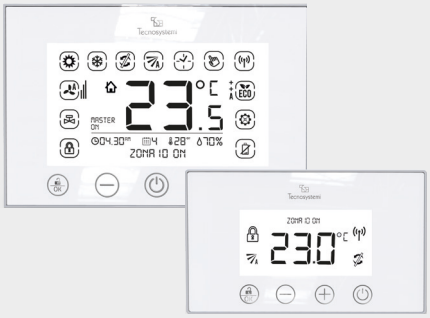

Catalogue 37

PRODUCT INDEX

09 Programmable thermostat wall-mounted with coils in touch radio frequency "DISCOVERY 3X"



10 Programmable thermostat wall-mounted with coils in touch radio frequency "MINI-DISCOVERY 3X"



11 Programmable thermostat built-in wired touch "STEALTH 3X"



12 Wall-mounted room probe with batteries in lem RF radiofrequency



13 Control unit with communication protocols, apps, Alexa and Google Home "POLARIS 4X" and "POLARIS 5X"



16 Motorised dampers and nozzles
Relay module for radiant and fan coil systems
Window contact and connection cables



26 How to choose your system
How to choose the right proair pack for you



28 Proair pack RF RED 2 with eolo plenum
Proair pack RF RED 2 with insulated metal plenum



30 Proair pack rf BLU 3
Eolo plenum / eolo plenum mini
Proair pack rf BLU 3 with insulated metal plenum



32 Proair pack rf AMBRA 4
Eolo plenum / eolo plenum mini
Proair pack rf AMBRA 4 with insulated metal plenum



34 Proair pack rf PINK 5 eolo plenum
Proair pack rf PINK 5 with insulated metal plenum



36 Proair pack rf BROWN 6 eolo plenum
Proair pack rf BROWN 6 with insulated metal plenum



38 Configure your system
Order forms



40 Proair pack wired GREEN 2 eolo plenum
Proair pack wired GREEN 2
with insulated metal plenum

40 Proair pack wired SILVER 3
eolo plenum / eolo plenum mini
Proair pack wired SILVER 3
with insulated metal plenum

42 Proair pack wired LILAC 4
eolo plenum / eolo plenum mini
Proair pack wired LILAC 4
with insulated metal plenum

42 Proair pack wired ORANGE 5 eolo plenum
Proair pack wired ORANGE 5
with insulated metal plenum
Proair pack wired BLACK 6 with insulated metal plenum

45 Custom-made insulated plenums
for ducted units in sintered polystyrene
in with insulated metal plenum and pal

80 Kit completing the proair pack system
for kit rapid air distribution

90 “ALTAIR POINT” punctual management
with motorised damper and nozzle

94 “SIRIO 2.0 POINT” punctual management
with motorised circular damper
“SIRIO 0.10V” punctual management

98 “SIRIO 2.0 PACK POINT”
punctual management
“SIRIO 0.10V PACK”
punctual management

102 “SIRIO 3.0 DEVIO POINT” punctual
management with “t” flow diverter
with motorised damper

104 “SIRIO POINT” punctual management
with motorised butterfly damper

106 “VEGA POINT” punctual management
with motorised delivery nozzle
and ir remote control and punctual system

110 “STAR POINT” punctual management
with motorised delivery nozzle complete
with plenum for low head ducted unit

GALAXY®
Multi - Zone
Air Control System

by Tecnosystemi group

The ideal climate wherever you want!

Control unit complete with Wi-Fi for remote management up to 16 zones!



Plus of the ProAir zoning control system

- Energy Saving
- Possibility to set the desired temperature in every single room
- Plug and Play Solution
- Radiant floor control for heating, cooling and fan coils
- Total design and integration
- Programming from App and control via smart speakers such as Alexa and Google Home
- Consumption Accounts
- Control unit with color display, with communication protocols dedicated to the main brands of air conditioners

FREE APP AVAILABLE ON:

Available on the App Store

GET IT ON Google Play

VOICE COMMANDS AVAILABLE FOR


amazon alexa

Google Home

Traditional Ducted System




Regulation of the same temperature for all rooms
via the remote control or the wire thermostat supplied.

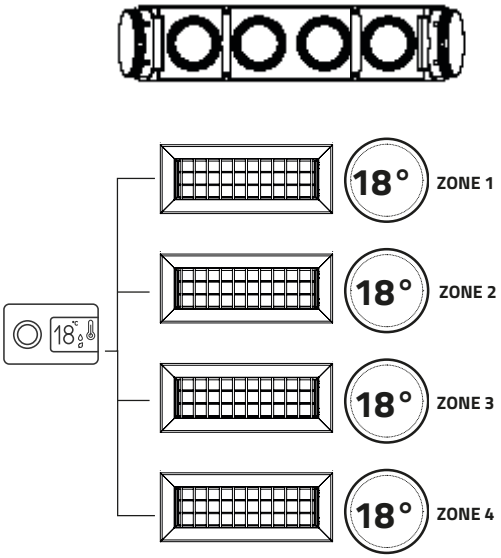

Ducted system with
differentiated temperature management



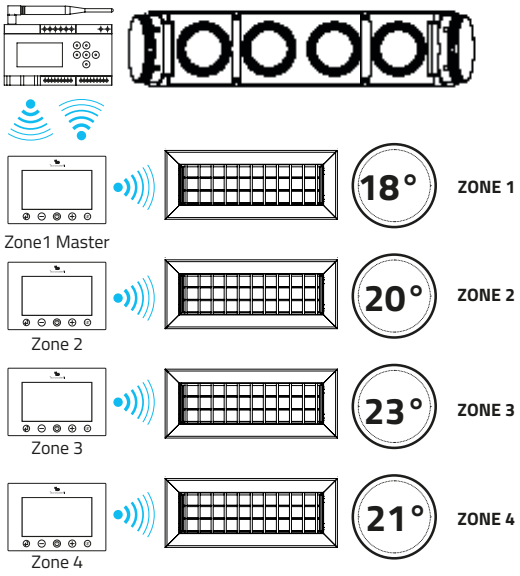

proAIR multi-zone









ELEGANT DESIGN AND INTUITIVE DISPLAY

Suitable for any kind of furniture

The range of battery-operated and wired programmable thermostats is characterised by **quick installation**, making it very easy to use thanks to the presence of the touch keys and the **central 4.5" or 2.4" backlit LCD display**.



ON / OFF
Directly from the programmable thermostat or from the App

PERCENTAGE OF HUMIDITY
Present in the environment
Humidity control with radiant system

ENERGY SAVING
Comfort function and window contact for zone shutdown

RADIOFREQUENCY SIGNAL
Signal reception indication


TIME PROGRAMMING
Programme the time bands and the temperature

ZONE VALVE
For radiators, radiant systems and fan coils


DAMPER MOVEMENTS
Sets the opening position of the motorised damper or nozzle.

SUMMER / WINTER
Set the system in cooling or heating

Models



Discovery 3X



Stealth 3X



Mini Discovery 3X



Sonda LEM

DISCOVERY 3X

MADE IN ITALY

WALL-MOUNTED BACKLIT PROGRAMMABLE THERMOSTAT WITH TOUCH, BATTERY-RUN RADIO FREQUENCY

TECHNICAL SPECIFICATIONS

- POWER SUPPLY BATTERY 4 X 1.5 V TIPO AA (LR03) SUPPLIED
- BATTERY LIFE 18/24 MONTHS (NORMAL USE)
- 868 MHZ RF DATA TRANSMISSION
- RF SIGNAL RANGE 50 M MAX. IN OPEN FIELD BETWEEN TIMED THERMOSTAT AND POLARIS 4X OR 5X CONTROL UNIT
- 4.5" BACKLIT LCD DISPLAY
- TOUCH KEYPAD
- TIMED OR MANUAL FEATURES
- AUTOMATIC OR MANUAL ADJUSTMENT OF DAMPER AND NOZZLE
- TIMED THERMOSTAT LOCK
- TEMPERATURE SCALE °C / °F
- RH DISPLAY IN %
- HUMIDITY CONTROL IN RADIANT COOLING MODE WITH RELAY MODULE
- READY FOR WINDOW CONTACT
- AT AND SET POINT VALUE
- CLOCK (AM - PM / 24H)
- DAILY AND WEEKLY FEATURE
- WALL MOUNTED USING TEMPLATE, SCREWS AND FIXING PLUGS SUPPLIED

CHRONOTHERMOSTAT MURAL RÉTROÉCLAIRÉ AVEC BATTERIES À FRÉQUENCE RADIO TACTILE

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION PAR BATTERIE 4 X 1.5 V TIPO AA (LR03) FOURNIES
- AUTONOMIE DE LA BATTERIE 18/24 MOIS (COMPTE TENU DE L'UTILISATION NORMALE)
- TRANSMISSION DE DONNÉES RF 868 MHZ
- PLAGE DE SIGNAL RF DE 50 M MAX EN CHAMP OUVERT ENTRE LE THERMOSTAT PROGRAMMABLE ET L'UNITÉ DE COMMANDE POLARIS 4X OU 5X
- ÉCRAN LCD RÉTROÉCLAIRÉ DE 4,5 PO
- CLAVIER TACTILE
- FONCTIONS CHRONOLOGIQUES OU MANUELLES
- RÉGLAGE AUTOMATIQUE OU MANUEL DU REGISTRE ET DE LA BUSE
- BLOC CHRONOTHERMOSTAT
- ÉCHELLE DE TEMPÉRATURE °C / °F
- INDICATION DE L'HR EN %
- CONTRÔLE DE L'HUMIDITÉ EN MODE DE REFROIDISSEMENT RADIANT AVEC MODULE DE RELAIS
- PRÉDISPOSÉ POUR LE CONTACT AVEC LA FENÊTRE
- VALEUR DE TA ET POINT DE CONSIGNE
- HORLOGE (AM - PM / 24H)
- FONCTION QUOTIDIENNE ET HEBDOMADAIRE
- MONTAGE MURAL À L'AIDE DU GABARIT, DES VIS ET DES CHEVILLES FOURNIS


WANDMONTIERTES HINTERGRUNDBELEUCHTETES CHRONO-THERMOSTAT MIT BATTERIE, RADIOFREQUENZ, TOUCHDISPLAY


TECHNISCHE EIGENSCHAFTEN

- VERSORGUNG MIT BATTERIE 4 X 1.5 V TIPO AA (LR03) IM LIEFERUMFANG ENTHALTEN
- BATTERIELAUFZEIT 18/24 MONATE (UNTER BERÜCKSICHTIGUNG EINES NORMALEN GEBRAUCHS)
- HF-DATENÜBERTRAGUNG MIT 868 MHZ
- REICHWEITE DES RF-SIGNALS MAX. 50 M IM FREIEN FELD ZWISCHEN THERMOSTAT UND POLARIS 4X ODER 5X STEUERGERÄT
- 4,5-ZOLL-LCD-DISPLAY HINTERLEUCHTET
- TOUCH-TASTATUR
- CHRONOLOGISCHE ODER MANUELLE FUNKTIONEN
- AUTOMATISCHE ODER MANUELLE VERSTELLUNG VON KLAPPE UND LUFTGITTER
- SPERRE DES CHRONO-THERMOSTATS
- TEMPERATURSKALA °C / °F
- ANGABE DES UR IN %
- KONTROLLE DER FEUCHTIGKEIT IM STRAHLUNGSKÜHLUNGSMODUS MIT RELAISMODUL
- VORBEREITET FÜR FENSTERKONTAKT
- TA- UND SOLLWERT
- UHR (AM - PM / 24H)
- TÄGLICHE UND WÖCHENTLICHE FUNKTION
- WANDMONTAGE MIT MITGELIEFERTER LEHRE, SCHRAUBEN UND DÜBELN

Battery power supply and data trasmission by radio frequency

Backlit display

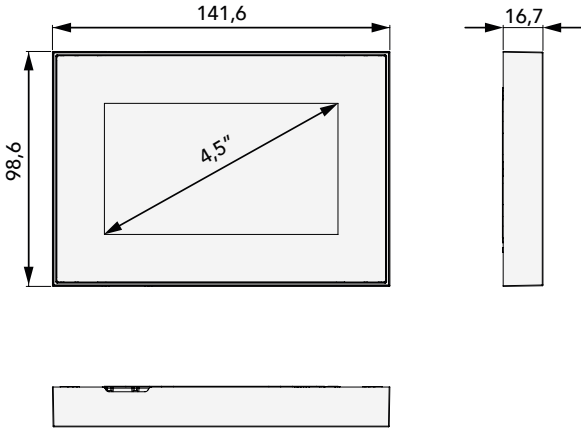

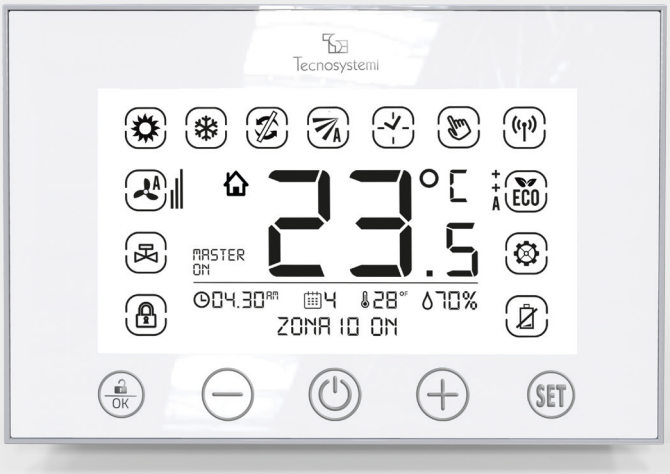

Virtual reality

3D

Datasheet

CODE	DESCRIPTION
GAD100005	WALL-MOUNTED BACKLIT PROGRAMMABLE THERMOSTAT WITH TOUCH, BATTERY-RUN RADIO FREQUENCY - DISCOVERY 3X

MINI - DISCOVERY 3X

MADE IN ITALY

WALL-MOUNTED BACKLIT PROGRAMMABLE THERMOSTAT WITH TOUCH, BATTERY-RUN RADIO FREQUENCY

TECHNICAL SPECIFICATIONS

- POWER SUPPLY BATTERY 2 X 1.5 V TYPE AAA (LR03) SUPPLIED
- BATTERY LIFE 18 MONTHS (NORMAL USE)
- 868 MHZ RF RADIO FREQUENCY DATA TRANSMISSION
- RF SIGNAL RANGE 50 M MAX. IN OPEN FIELD BETWEEN TIMED THERMOSTAT AND POLARIS 4X OR 5X CONTROL UNIT
- 2.4" LCD DISPLAY
- WHITE BACKGROUND TOUCH DISPLAY WITH BLACK NUMBERS
- BACKLIGHT 5 SEC.
- TIMED OR MANUAL FEATURES (*)
- AUTOMATIC OR MANUAL ADJUSTMENT OF DAMPER AND NOZZLE
- TIMED THERMOSTAT LOCK
- TEMPERATURE SCALE °C/°F (*)
- AT AND SET POINT VALUE
- READY FOR WINDOW CONTACT
- CLOCK (AM - PM / 24H) (*)
- DAILY AND WEEKLY FEATURE
- WALL MOUNTED USING TEMPLATE, SCREWS AND FIXING PLUGS SUPPLIED

CHRONOTHERMOSTAT MURAL RÉTROÉCLAIRÉ AVEC BATTERIES À FRÉQUENCE RADIO TACTILE

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION PAR BATTERIE 2 X 1,5 V TYPE AAA (LR03) FOURNIES
- AUTONOMIE DE LA BATTERIE 18 MOIS (COMPTE TENU DE L'UTILISATION NORMALE)
- TRANSMISSION DE DONNÉES RADIOFRÉQUENCE RF À 868 MHZ PLAGE DE SIGNAL RF DE 50 M MAX EN CHAMP OUVERT ENTRE LE THERMOSTAT PROGRAMMABLE ET L'UNITÉ DE COMMANDE POLARIS 4X OU 5X
- ÉCRAN LCD 2,4"
- ÉCRAN TACTILE BLANC ET CHIFFRES NOIRS
- RÉTROÉCLAIRAGE 5 SEC.
- FONCTIONS CHRONOLOGIQUES OU MANUELLES (*)
- RÉGLAGE AUTOMATIQUE OU MANUEL DU REGISTRE ET DE LA BUSE
- BLOC CHRONOTHERMOSTAT
- ÉCHELLE DE TEMPÉRATURE °C/°F (*)
- VALEUR DE TA ET POINT DE CONSIGNE
- PRÉDISPOSÉ POUR LE CONTACT AVEC LA FENÊTRE
- HORLOGE (AM - PM / 24H) (*)
- FONCTION QUOTIDIENNE ET HEBDOMADAIRE
- MONTAGE MURAL À L'AIDE DU GABARIT, DES VIS ET DES CHEVILLES FOURNIS

WANDMONTIERTES HINTERGRUNDBELEUCHTETES CHRONO-THERMOSTAT MIT BATTERIE, RADIOFREQUENZ, TOUCHDISPLAY


TECHNISCHE EIGENSCHAFTEN

- VERSORGUNG MIT BATTERIE 2 X 1,5 V TYP AAA (LR03) IM LIEFERUMFANG ENTHALTEN
- BATTERIELAUFZEIT 18 MONATE (UNTER BERÜCKSICHTIGUNG DES NORMALEN GEBRAUCHS)
- HOCHFREQUENZ-DATENÜBERTRAGUNG MIT 868 MHZ
- REICHWEITE DES RF-SIGNALS MAX. 50 M IM FREIEN FELD ZWISCHEN THERMOSTAT UND POLARIS 4X ODER 5X STEUERGERÄT
- 2,4"LCD-DISPLAY
- TOUCH-DISPLAY MIT WEISSEM HINTERGRUND UND SCHWARZEN ZAHLEN
- HINTERGRUNDBELEUCHTUNG 5 SEK.
- CHRONOLOGISCHE ODER MANUELLE FUNKTIONEN (*)
- AUTOMATISCHE ODER MANUELLE VERSTELLUNG VON KLAPPE UND LUFTGITTER
- SPERRE DES CHRONO-THERMOSTATS
- TEMPERATURSKALA °C/°F (*)
- TA- UND SOLLWERT
- VORBEREITET FÜR FENSTERKONTAKT
- UHR (AM - PM / 24H) (*)
- TÄGLICHE UND WÖCHENTLICHE FUNKTION
- WANDMONTAGE MIT MITGELIEFERTER LEHRE, SCHRAUBEN UND DÜBELN

4.5" backlit LCD display

The chrono-thermostat must always be paired with a "discovery 2x/3x" or "stealth 2x" that will serve as master



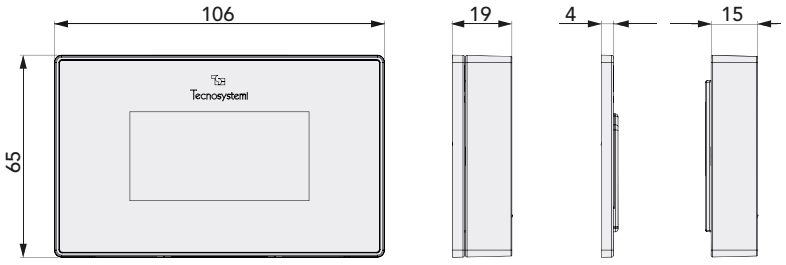

Virtual reality

3D

Datasheet

CODE	DESCRIPTION
GAD100005	WALL-MOUNTED BACKLIT PROGRAMMABLE THERMOSTAT WITH TOUCH, BATTERY-RUN RADIO FREQUENCY - DISCOVERY 3X

STEALTH 3X

MADE IN ITALY

BUILT-IN WIRED BACKLIT PROGRAMMABLE THERMO-STAT WITH TOUCH

TECHNICAL SPECIFICATIONS

- POWER SUPPLY BATTERY 2 X 1.5 V TYPE AAA (LR03) SUPPLIED
- BATTERY LIFE 18 MONTHS (NORMAL USE)
- 868 MHZ RF RADIO FREQUENCY DATA TRANSMISSION
- RF SIGNAL RANGE 50 M MAX. IN OPEN FIELD BETWEEN TIMED THERMOSTAT AND POLARIS 4X OR 5X CONTROL UNIT
- 2.4" LCD DISPLAY
- WHITE BACKGROUND TOUCH DISPLAY WITH BLACK NUMBERS
- BACKLIGHT 5 SEC.
- TIMED OR MANUAL FEATURES (*)
- AUTOMATIC OR MANUAL ADJUSTMENT OF DAMPER AND NOZZLE
- TIMED THERMOSTAT LOCK
- TEMPERATURE SCALE °C/°F (*)
- AT AND SET POINT VALUE
- READY FOR WINDOW CONTACT
- CLOCK (AM - PM / 24H) (*)
- DAILY AND WEEKLY FEATURE
- WALL MOUNTED USING TEMPLATE, SCREWS AND FIXING PLUGS SUPPLIED

CHRONOTHERMOSTAT ENCASTRÉ ET RÉTROÉCLAIRÉ FILAIRE

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION PAR BATTERIE 2 X 1,5 V TYPE AAA (LR03) FOURNIES
- AUTONOMIE DE LA BATTERIE 18 MOIS (COMPTE TENU DE L'UTILISATION NORMALE)
- TRANSMISSION DE DONNÉES RADIOFRÉQUENCE RF À 868 MHZ PLAGE DE SIGNAL RF DE 50 M MAX EN CHAMP OUVERT ENTRE LE THERMOSTAT PROGRAMMABLE ET L'UNITÉ DE COMMANDE POLARIS 4X OU 5X
- ÉCRAN LCD 2,4"
- ÉCRAN TACTILE BLANC ET CHIFFRES NOIRS
- RÉTROÉCLAIRAGE 5 SEC.
- FONCTIONS CHRONOLOGIQUES OU MANUELLES (*)
- RÉGLAGE AUTOMATIQUE OU MANUEL DU REGISTRE ET DE LA BUSE
- BLOC CHRONOTHERMOSTAT
- ÉCHELLE DE TEMPÉRATURE °C/°F (*)
- VALEUR DE TA ET POINT DE CONSIGNE
- PRÉDISPOSÉ POUR LE CONTACT AVEC LA FENÊTRE
- HORLOGE (AM - PM / 24H) (*)
- FONCTION QUOTIDIENNE ET HEBDOMADAIRE
- MONTAGE MURAL À L'AIDE DU GABARIT, DES VIS ET DES CHEVILLES FOURNIS


HINTERGRUNDBELEUCH-TETES EINBAU-CHRONO-THERMOSTAT VERKABELT MIT TOUCHDISPLAY


TECHNISCHE EIGENSCHAFTEN

- VERSORGUNG MIT BATTERIE 2 X 1,5 V TYP AAA (LR03) IM LIEFERUMFANG ENTHALTEN
- BATTERIELAUFZEIT 18 MONATE (UNTER BERÜCKSICHTIGUNG DES NORMALEN GEBRAUCHS)
- HOCHFREQUENZ-DATENÜBERTRAGUNG MIT 868 MHZ
- REICHWEITE DES RF-SIGNALS MAX. 50 M IM FREIEN FELD ZWISCHEN THERMOSTAT UND POLARIS 4X ODER 5X STEUERGERÄT
- 2,4"LCD-DISPLAY
- TOUCH-DISPLAY MIT WEISSEM HINTERGRUND UND SCHWARZEN ZAHLEN
- HINTERGRUNDBELEUCHTUNG 5 SEK.
- CHRONOLOGISCHE ODER MANUELLE FUNKTIONEN (*)
- AUTOMATISCHE ODER MANUELLE VERSTELLUNG VON KLAPPE UND LUFTGITTER
- SPERRE DES CHRONO-THERMOSTATS
- TEMPERATURSKALA °C/°F (*)
- TA- UND SOLLWERT
- VORBEREITET FÜR FENSTERKONTAKT
- UHR (AM - PM / 24H) (*)
- TÄGLICHE UND WÖCHENTLICHE FUNKTION
- WANDMONTAGE MIT MITGELIEFERTER LEHRE, SCHRAUBEN UND DÜBELN

4.5" backlit LCD display

Power supply and data transmission by wiring

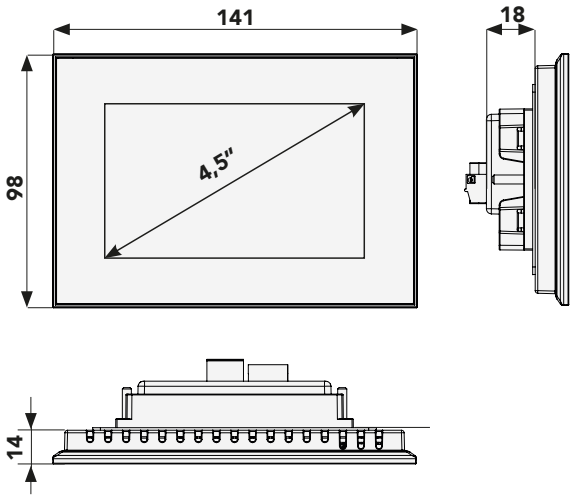

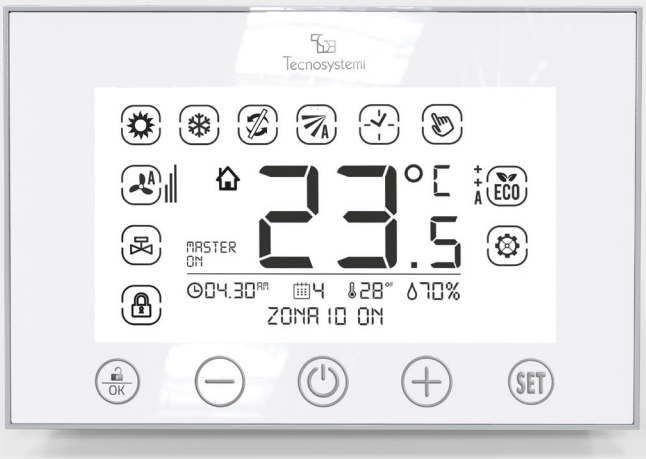

Virtual reality

Datasheet

CODE	DESCRIPTION
GAD100015	STEALTH 3X BUILT-IN WIRED BACKLIT PROGRAMMABLE THERMOSTAT WITH TOUCH

LEM 3X RF

MADE IN ITALY

WALL-MOUNTED ROOM PROBE WITH RADIO FREQUENCY BATTERIES

TECHNICAL SPECIFICATIONS

- POWER SUPPLY BATTERY 2 X 1.5 V TYPE AAA (LR03) SUPPLIED
- BATTERY LIFE 18 MONTHS
- 868 MHZ RF RADIO FREQUENCY DATA TRANSMISSION
- RF SIGNAL RANGE 50 M MAX. IN OPEN FIELD BETWEEN PROBE AND POLARIS 4X OR 5X CONTROL UNIT
- ROOM TEMPERATURE SENSOR
- MOISTURE SENSOR
- HUMIDITY CONTROL IN RADIANT COOLING MODE WITH RELAY MODULE
- BLUE ALERT LED ACTIVATES EVERY 60 SECONDS
- WALL MOUNTED USING TEMPLATE, SCREWS AND FIXING PLUGS SUPPLIED

SONDE MURALE POUR PIÈCE AVEC BATTERIES EN RADIO-FRÉQUENCE

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION PAR BATTERIE 2 X 1,5 V TYPE AAA (LR03) FOURNIES
- AUTONOMIE DE LA BATTERIE 18 MOIS
- TRANSMISSION DE DONNÉES RADIOFRÉQUENCE RF À 868 MHZ
- PLAGE DE SIGNAL RF DE 50 M MAX EN CHAMP OUVERT ENTRE LA SONDE ET L'UNITÉ DE COMMANDE POLARIS 4X OU POLARIS 5X
- CAPTEUR DE TEMPÉRATURE AMBIANTE
- CAPTEUR D'HUMIDITÉ
- CONTRÔLE DE L'HUMIDITÉ EN MODE DE REFROIDISSEMENT RADIANT AVEC MODULE DE RELAIS
- LED DE SIGNALISATION BLEUE QUI S'ACTIVE TOUTES LES 60 SECONDES
- MONTAGE MURAL À L'AIDE DU GABARIT, DES VIS ET DES CHEVILLES FOURNIS

WANDMONTIERTE RAUMSONDE HOCHFREQUENZBATTERIEN


TECHNISCHE EIGENSCHAFTEN

- VERSORGUNG MIT BATTERIE 2 X 1,5 V TYP AAA (LR03) IM LIEFERUMFANG ENTHALTEN
- BATTERIELAUFZEIT 18 MONATE
- HOCHFREQUENZ-DATENÜBERTRAGUNG MIT 868 MHZ
- REICHWEITE DES RF-SIGNALS MAX. 50 M IM FREIEN FELD ZWISCHEN SONDE UND POLARIS 4X ODER 5X STEUERGERÄT
- RAUMTEMPERATURSENSOR
- FEUCHTIGKEITSSENSOR
- KONTROLLE DER FEUCHTIGKEIT IM STRAHLUNGSKÜHLUNGSMODUS MIT RELAISMODUL
- BLAUE SIGNAL-LED, DIE ALLE 60 SEKUNDEN AKTIVIERT WIRD
- WANDMONTAGE MIT MITGELIEFERTER LEHRE, SCHRAUBEN UND DÜBELN


Power supply battery and radio frequency data transmission

Lem probes must always be combined with a DISCOVERY 2X or STEALTH 3X thermostat carrying out the master function





BLUE ALERT LED EVERY 60 SECONDS

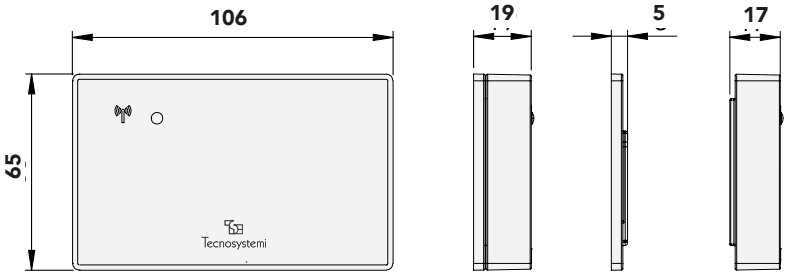

Datasheet

CODE	DESCRIPTION
GAD100011	LEM 3X RF WALL-MOUNTED ROOM PROBE WITH RADIO FREQUENCY BATTERIES

POLARIS 5X (WI-FI)

MADE IN ITALY

SINGLE CONTROL UNIT

with colour display, communication protocols and Alexa - Google Home

TECHNICAL SPECIFICATIONS

- POWER SUPPLY 230 V - 50/60 HZ
- DIMENSIONS W 160 X H 90 X D 34 MM
- WALL MOUNTED OR DIN RAIL MOUNTED
- 2.5" LCD COLOUR DISPLAY
- MEMBRANE CONFIGURATION KEYPAD
- DATA TRANSMISSION IN RF 868 MHZ WITH 50M RANGE IN OPEN FIELD
- DATA TRANSMISSION THROUGH A 4 X 0.22 CABLE WITH A RANGE UP TO 100 M BETWEEN POLARIS 5X AND THE LAST CHRONO-THERMOSTAT
- ON/OFF MANAGEMENT
- DEHUMIDIFICATION MANAGEMENT IN FLOOR COOLING FEATURE WITH EV
- MANAGEMENT 0-10V
- 3 SPEEDS MANAGEMENT (VIA RELAY MODULE)
- DEHUMIDIFICATION MANAGEMENT IN FLOOR COOLING FEATURE WITH EV
- ARRANGEMENT FOR MONITORING THE ENERGY CONSUMPTION OF THE AIR CONDITIONING SYSTEM
- READY FOR WINDOW CONTACT
- READY FOR PROAIR SYSTEM CONTROL VIA VOICE COMMAND
- ARRANGEMENT FOR PROAIR SYSTEM CONTROL VIA THE INTEGRATED WI-FI MODULE AND PROAIR MULTI-ZONE APPLICATION
- OVER 30 INTEGRATED COMMUNICATION PROTOCOLS
- ON/OFF INPUTS FOR ALARMS
- OUT1 AND OUT2 OUTPUTS FOR THE MANAGEMENT OF DAMPERS, NOZZLES AND RELAY MODULE VIA 8-POLE TELEPHONE CABLE WITH RJ45 CONNECTOR PLUG
- BOOTLOADER FEATURE THAT ALLOWS FIRMWARE UPDATE OF THE CONTROL UNIT

UNITÉ DE CONTRÔLE UNIQUE

avec affichage couleur, protocoles de communication et application Alexa - Google Home

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION 230 V - 50/60 HZ
- DIMENSIONS L 160 X H 90 X P 34 MM
- MONTAGE MURAL OU MONTAGE SUR RAIL DIN
- ÉCRAN LCD COULEUR 2,5"
- CLAVIER DE CONFIGURATION DE LA MEMBRANE
- TRANSMISSION DE DONNÉES RF 868 MHZ AVEC UNE PORTÉE DE 50 M EN CHAMP LIBRE
- TRANSMISSION DES DONNÉES VIA UN CÂBLE 4 X 0,22 AVEC UNE PORTÉE MAXIMALE DE 100 M ENTRE POLARIS 5X ET LE DERNIER CHRONO
- GESTION ON/OFF
- GESTION DE LA DÉSHUMIDIFICATION EN OPÉRATION DE REFROIDISSEMENT DU SOL AVEC EV
- GESTION 0-10V
- GESTION 3 VITESSES (AVEC MODULE RELAIS)
- GESTION DE LA DÉSHUMIDIFICATION EN OPÉRATION DE REFROIDISSEMENT DU SOL AVEC EV
- PRÉDISPOSÉ POUR CONTRÔLER LA CONSOMMATION D'ÉNERGIE DU SYSTÈME DE CLIMATISATION
- PRÉDISPOSÉ POUR L'UTILISATION DE CONTACT DE FENÊTRE
- PRÉPARÉ POUR CONTRÔLER LE SYSTÈME PROAIR À L'AIDE DE COMMANDES VOCALES
- PRÉDISPOSÉ POUR LE CONTRÔLE DU SYSTÈME PROAIR VIA LE MODULE WI-FI INTÉGRÉ ET L'APPLICATION PROAIR MULTI-ZONE
- PLUS DE 30 PROTOCOLES DE COMMUNICATION INTÉGRÉS
- ENTRÉES ON/OFF POUR LES ALARMES
- SORTIES OUT1 ET OUT2 POUR LA GESTION DES SOUPAPES, GRILLES ET MODULE RELAIS VIA CÂBLE TÉLÉPHONIQUE 8 PÔLES AVEC CONNECTEUR RJ45
- LA FONCTION BOOTLOADER QUI PERMET LA MISE À JOUR DU FIRMWARE DE L'UNITÉ DE CONTRÔLE

EINZELSTEUERGERÄT

mit Kommunikationsprotokollen und Alexa App - Google Home

TECHNISCHE EIGENSCHAFTEN

- STROMVERSORGUNG 230 V - 50/60 HZ
- ABMESSUNGEN B 160 X H 90 X T 34 MM
- WANDMONTAGE ODER MONTAGE AUF DON-SCHIENE
- 25 "FARB-LCD-DISPLAY
- TASTATUR FÜR DIE MEMBRANKONFIGURATION
- RF-DATENÜBERTRAGUNG MIT 868 MHZ UND EINER REICHWEITE VON 50 M IN OFFENEN BEREICHEN
- DATENÜBERTRAGUNG ÜBER KABEL MIT 4 X 0,22 UND EINER MAXIMALEN REICHWEITE VON 100 M ZWISCHEN POLARIS 5X UND LETZTEM CHRONO
- EIN/AUS VERWALTUNG
- VERWALTUNG DER ENTFEUCHTUNG IN DER BODENKÜHLUNG MIT EV
- 0-10V VERWALTUNG
- VERWALTUNG MIT 3 GESCHWINDIGKEITEN (MIT RELAISMODUL)
- VORBEREITET FÜR DIE KONTROLLE DES ENERGIEVERBRAUCHS DER KLIMAANLAGE
- VORBEREITET FÜR DIE VERWENDUNG DES FENSTERKONTAKTS
- VORBEREITET, UM DAS PROAIR-SYSTEM MIT SPRACHBEFEHLEN ZU STEUERN
- VORBEREITET FÜR DIE STEUERUNG DES PROAIR-SYSTEMS ÜBER EIN INTEGRIERTES WLAN-MODUL UND PROAIR MULTI-ZONE-ANWENDUNG
- ÜBER 30 INTEGRIERTE KOMMUNIKATIONSPROTOKOLLE
- EIN-/AUS-EINGÄNGE FÜR ALARME
- AUSGÄNGE OUT1 UND OUT2 ZUR VERWALTUNG VON KLAPPEN, DÜSEN UND RELAISMODUL ÜBER 8-POLIGES TELEFONKABEL MIT RJ45-STECKVERBINDER
- BOOTLOADER-FUNKTION, DIE DAS FIRMWARE-UPDATE DES STEUERGERÄTES ERMÖGLICHT

Over 30 integrated communication protocols (see pag. 15)


Virtual reality

3D

Voice commands available for

amazon alexa

Google Home

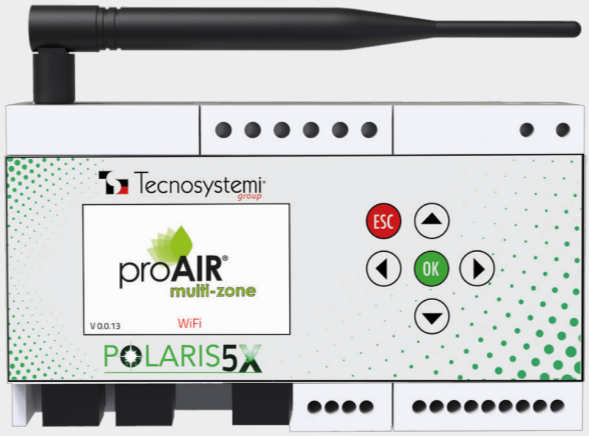

WITH COLOUR DISPLAY


Datasheet

CODE	DESCRIPTION
GAD100012	SINGLE CONTROL UNIT WITH COLOUR DISPLAY, COMMUNICATION PROTOCOLS AND ALEXA APP - GOOGLE HOME

USE THE "PROAIR MULTI - ZONE CONTROL SYSTEM" APP TO CONTROL A NUMBER OF UNITS AT ANY TIME, IN ANY PLACE

To access the control unit functions **use the tecnosystemi multi-zone control system app**, with which you can monitor and run your system in real time by means of a remote control. Whether you're at home, in the office or travelling,
You can remotely control your air conditioning units in a simple, practical way.

Controlling your home's air conditioning is now even easier!

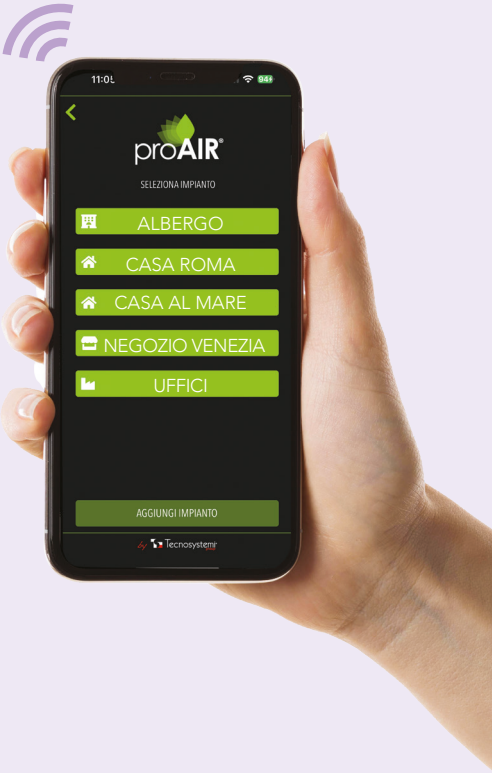

Tecnosystemi

FREE APP
available on:

Available on the App Store

GET IT ON Google Play

WITH THE POLARI CONTROL UNIT YOU CAN MANAGE THE SYSTEM WITH ALEXA AND GOOGLE HOME

Voice commands available for

amazon alexa

Google Home



POLARIS

COMMUNICATION PROTOCOLS FOR CONTROL UNIT

COMMUNICATION PROTOCOLS ARE INSTALLED IN THE POLARIS 4X AND POLARIS 5X CONTROL UNITS TO SEND THE MAIN SETTINGS TO THE DUCTED UNIT, WITHOUT USING THE SUPPLIED REMOTE CONTROL. IN THIS WAY, THE CUSTOMER CAN DEFINE, IN A SINGLE ACTION, THE OPERATING MODES OF BOTH THE DUCTED UNIT AND THE PROAIR SYSTEM DIRECTLY FROM THE MASTER PROGRAMMABLE THERMOSTAT (DISCOVERY 2X / 3X OR STEALTH 3X OR FROM THE PROAIR MULTIZONE APP).

ATTENTION: MAKE SURE THAT THE DUCTED MACHINE PROVIDES THE INFRA-RED RECEIVER.

MAKE SURE THE PROTOCOL IS PRESENT IN THE CONTROL UNIT.
THE PROTOCOLS DEDICATED TO THE MAIN COMMERCIALLY-AVAILABLE AIR CONDITIONING UNITS ALLOW ASSIGNING THE FOLLOWING FUNCTIONS, DEPENDING ON THE TYPE OF DUCTED UNIT:

- ON / OFF OF DUCTED UNIT
- OPERATING MODE: WARM - COLD - VENTILATION - DEHUMIDIFICATION
- HOT AND COLD SET POINT
- FAN SPEED MANAGEMENT

ATTENTION! THE AFOREMENTIONED MODES MAY VARY ACCORDING TO THE MODEL OF THE DUCTED UNIT THAT HAS BEEN INSTALLED. USING THE CONTROL UNIT MODELS POLARIS 4X AND 5X COMPLETE WITH COMMUNICATION PROTOCOLS DOES NOT ENTAIL THE PURCHASE OF THE INTERFACE FOR ON-OFF REMOTE CONTROL.

PROTOCOLES DE COMMUNICATION POUR UNITÈ DE CONTROL

LES PROTOCOLES DE COMMUNICATION SONT INSTALLÉS DANS L'UNITÉ DE COMMANDE POLARIS 4X ET POLARIS 5X, QUI PEUT ENVOYER LES PRINCIPAUX RÉGLAGES À L'UNITÉ CANALISÉE, SANS UTILISER LA TÉLÉCOMMANDE FOURNIE. DE CETTE FAÇON, LE CLIENT POURRA DÉFINIR EN UNE SEULE ACTION LES MODES DE FONCTIONNEMENT, TANT DE L'UNITÉ CANALISÉE QUE DU SYSTÈME PROAIR, DIRECTEMENT À PARTIR DU THERMOSTAT PROGRAMMABLE PRINCIPAL (DISCOVERY 2X/3X OU STEALTH 3X OU À PARTIR DE L'APPLICATION PROAIR MULTIZONE).

ASSUREZ-VOUS QUE LE PROTOCOLE EST PRÉSENT DANS LA CENTRALE.

SELON LE TYPE DE MODÈLE D'UNITÉ CANALISÉE, **LES PROTOCOLES DÉDIÉS DES PRINCIPALES MARQUES DE CLIMATISEURS DU MARCHÉ PERMETTENT D'AFFECTER LES FONCTIONS SUIVANTES:**

- MARCHE / ARRÊT DE L'UNITÉ CANALISÉE
- MODALITÉS DE FONCTIONNEMENT : CHAUD - FROID - VENTILATION - DÉSHUMIDIFICATION
- POINT DE CONSIGNE CHAUD ET FROID
- GESTION DE LA VITESSE DU VENTILATEUR

ATTENTION ! LES MODALITÉS ÉNONCÉES CI-DESSUS PEUVENT VARIER SELON LE MODÈLE DE L'UNITÉ CANALISÉE INSTALLÉE. L'UTILISATION DE L'UNITÉ DE COMMANDE POLARIS 4X ET 5X COMPLÈTE AVEC LE PROTOCOLE DE COMMUNICATION N'IMPLIQUE PAS L'ACHAT DE L'INTERFACE POUR LA COMMANDE MARCHE-ARRÊT À DISTANCE.

KOMMUNIKATIONS-PROTOKOLLE STEUERGERÄT

DIE KOMMUNIKATIONSPROTOKOLLE, DIE DIE WICHTIGSTEN EINSTELLUNGEN AN DIE KANALISIERTE EINHEINT SENDEN KÖNNEN, OHNE DIE MITGELIEFERTE FERNBEDIENUNG ZU VERWENDEN, SIND IN DEN STEUERGERÄTEN POLARIS 4X UND POLARIS 5X INSTALLIERT. AUF DIESE WEISE KANN DER KUNDE DIE BETRIEBSARTEN SOWOHL DES KANALISIERTEN GERÄTS ALS AUCH DES PROAIR-SYSTEMS IN EINER EINZIGEN HANDHABUNG DIREKT AM MASTER-CHRONOTHERMOSTAT (DISCOVERY 2X / 3X ODER STEALTH 3X ODER PROAIR MULTIZONE APP) DEFINIEREN.


STELLEN SIE SICHER, DASS DAS PROTOKOLL IN DER STEUEREINHEIT GEÖFFNET WIRD.


ABHÄNGIG VOM TYP DES KANALISIERTEN GERÄTEMODELLS ERLAUBEN DIE SPEZIELLEN **PROTOKOLLE DER WICHTIGSTEN KLIMAGERÄTEMARKEN AUF DEM MARKT DIE ZUORDNUNG DER FOLGENDEN FUNKTIONEN:**

- EIN/AUS DER KANALEINHEIT
- BETRIEBSMODUS: WARM - KATL - BELÜFTUNG - ENTFEUCHTUNG
- SOLLWERT BEIM KÜHLEN UND HEIZEN
- VERWALTUNG DER LÜFTERDREHZAHL

ACHTUNG! DIE OBEN GENANNTEN MODI KÖNNEN ABHÄNGIG VOM MODELL DES INSTALLIERTEN KANALISIERTEN GERÄTS VARIIEREN. DIE VERWENDUNG DER POLARIS 4X- UND 5X-STEUEREINHEIT EINSCHLIESSLICH KOMMUNIKATIONSPROTOKOLL BEDEUTET NICHT DEN KAUF DER SCHNITTSTELLE FÜR DIE EIN-AUS-FERNBEDIENUNG.

MITSUBISHI ELECTRIC · DAIKIN · SAMSUNG · PANASONIC · TOSHIBA
Haier · FUJITSU · GREE · Fuji Electric · Hisense
LG · MITSUBISHI HEAVY INDUSTRIES, LTD. · HITACHI · parkair energy solutions · VIESMANN
AERMEC · GENERAL · argo · CLIVET · STORM
SABIANA · tekno point · fiorini · IDEMA · MIDEA · sinclair AIR CONDITIONING

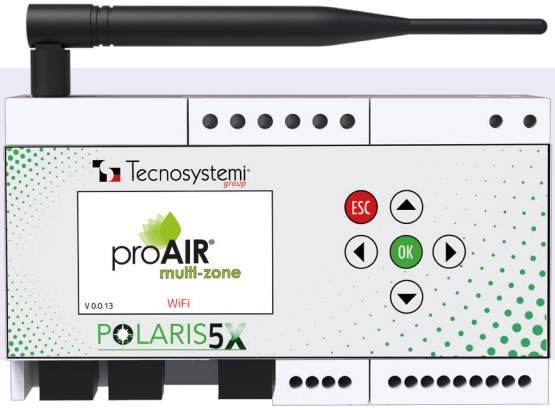

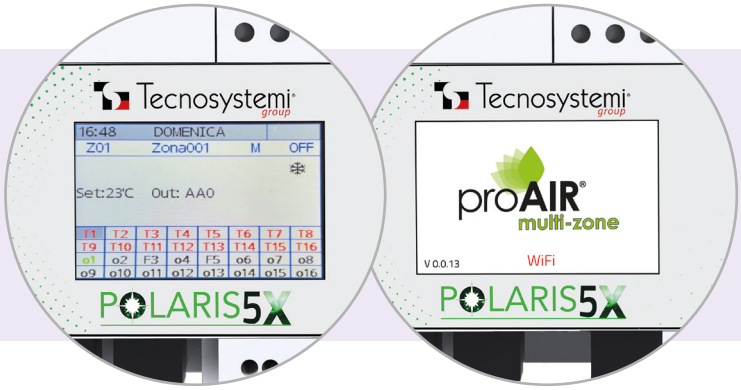

ONLY AVAILABLE FOR MACHINES SUPPLIED WITH REMOTE CONTROL

PROAIR MULTI-ZONE

MADE IN ITALY

MOTORISED CIRCULAR DAMPER / MOTORISED CIRCULAR BY-PASS FOR SYSTEM

TECHNICAL SPECIFICATIONS

- REMOVABLE MOTOR THAT CAN BE POSITIONED AT: 0° - 90° - 180° - 270° - 360°
- MADE OF ANTI-CONDENSATION PLASTIC
- ENSURES THERMAL INSULATION BETWEEN THE INNER AND OUTER SURFACES

FERMETURE CIRCULAIRE MOTORISÉE/PASSE CIRCULAIRE MOTORISÉ POUR SYSTÈME

CARACTÉRISTIQUES TECHNIQUES

- MOTEUR AMOVIBLE QUI PEUT ÊTRE POSITIONNÉ À : 0° - 90° - 180° - 270° - 360°
- FABRIQUÉ EN MATIÈRE PLASTIQUE ANTI-CONDENSATION
- ASSURE L'ISOLATION THERMIQUE ENTRE LA SURFACE INTÉRIEURE ET LA SURFACE EXTÉRIEURE

MOTORISIERTE KREISKLAPPE / MOTORISIERTER KREISBYPASS FÜR SYSTEM


TECHNISCHE EIGENSCHAFTEN

- ABNEHMBARER MOTOR, DER POSITIONIERT WERDEN KANN BEI: 0° - 90° - 180° 270° - 360°
- HERGESTELLT AUS ANTIKONDENSATIONS-KUNSTSTOFF
- GEWÄHRLEISTET DIE THERMISCHE ISOLIERUNG ZWISCHEN INNEN- UND AUSSENFLÄCHE

Made of anti-condensation ABS plastic

Fabriqué en matière plastique wanti-condensation

Hergestellt aus Antikondensations-Kunststoff

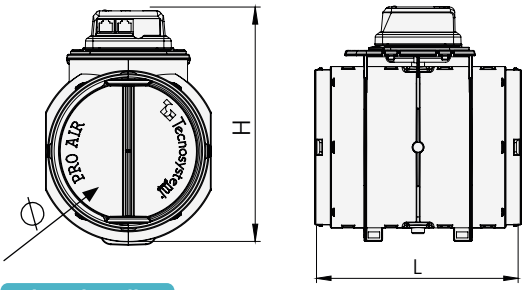

Virtual reality

3D



ATTENTION! Use only tecnosystemi cables - do not use cables other than those indicated in order not to compromise the correct functioning of the system.
It's obligatory to always provide the inspection hatch to access the control unit and the dampers.
Always install the dampers with the motor facing downwards.

Datasheet

CODE	DIMENSIONS			MAX AIR FLOW RATE
	Ø COUPLER [mm]	H [mm]	L [mm]	m³/h
GAD300019	150	218	154	388
GAD300020	200	268	204	678

COLLAR FOR CIRCULAR DAMPER WITH MANUAL ADJUSTMENT

COLLIER POUR REGISTRE CIRCULAIRE À RÉGLAGE MANUEL

SCHELLE FÜR RUNDKLAPPE MIT MANUELLER EINSTELLUNG

Datasheet

CODE	Ø [mm]
GAD300021	150
GAD300022	200



PROAIR MULTI-ZONE

CE MADE IN ITALY

MOTORISED CIRCULAR DAMPER / MOTORISED CIRCULAR BY-PASS FOR SYSTEM

TECHNICAL SPECIFICATIONS

- REMOVABLE MOTOR THAT CAN BE POSITIONED AT: 0° - 90° - 180° - 270° - 360°
- MADE OF ANTI-CONDENSATION PLASTIC
- ENSURES THERMAL INSULATION BETWEEN THE INNER AND OUTER SURFACES

FERMETURE CIRCULAIRE MOTORISÉE/PASSE CIRCULAIRE MOTORISÉ POUR SYSTÈME

CARACTÉRISTIQUES TECHNIQUES

- MOTEUR AMOVIBLE QUI PEUT ÊTRE POSITIONNÉ À : 0° - 90° - 180° - 270° - 360°
- FABRIQUÉ EN MATIÈRE PLASTIQUE ANTI-CONDENSATION
- ASSURE L'ISOLATION THERMIQUE ENTRE LA SURFACE INTÉRIEURE ET LA SURFACE EXTÉRIEURE

MOTORISIERTE KREISKLAPPE / MOTORISIERTER KREISBYPASS FÜR SYSTEM


TECHNISCHE EIGENSCHAFTEN


- ABNEHMBARER MOTOR, DER POSITIONIERT WERDEN KANN BEI: 0° - 90° - 180° 270° - 360°
- HERGESTELLT AUS ANTIKONDENSATIONS-KUNSTSTOFF
- GEWÄHRLEISTET DIE THERMISCHE ISOLIERUNG ZWISCHEN INNEN- UND AUSSENFLÄCHE

Made of anti-condensation ABS plastic

Fabriqué en matière plastique wanti-condensation

Hergestellt aus Antikondensations-Kunststoff

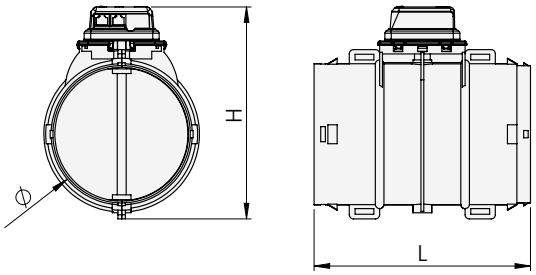

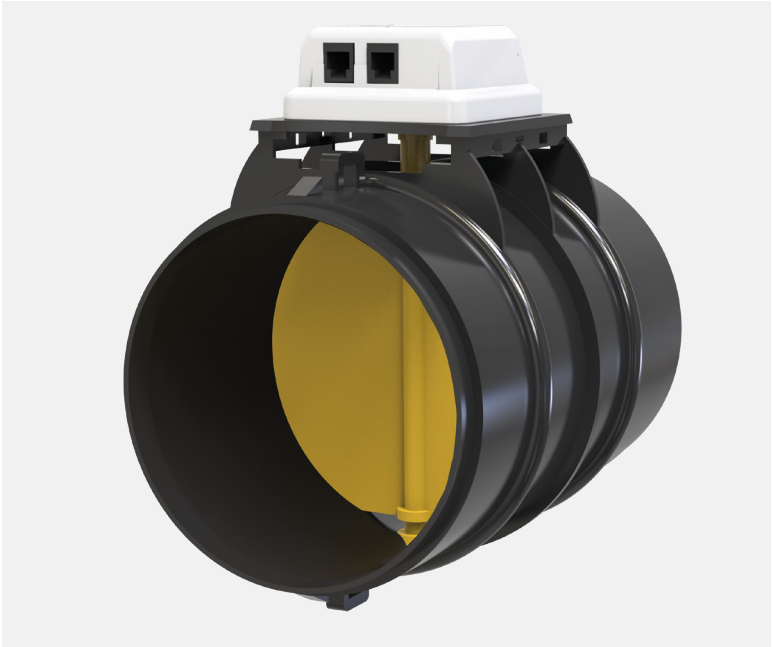

ATTENTION! Use only tecnosystemi cables - do not use cables other than those indicated in order not to compromise the correct functioning of the system.
It's obligatory to always provide the inspection hatch to access the control unit and the dampers.
Always install the dampers with the motor facing downwards.

CODE	DIMENSIONS			MAX AIR FLOW RATE
	Ø COUPLER [mm]	H [mm]	L [mm]	m³/h
11181530	250	330	280	1060
11181540	300	380	350	1526

YouTube VIDEO

Datasheet

FIXING COLLAR ON PLENUM
for motorised circular damper
Ø 150 - 200 - 250 - 300

COLLIER DE FIXATION SUR PLÉNUM
pour vanne circulaire motorisée
Ø 150 - 200 - 250 - 300

BEFESTIGUNGSSCHELLE AM PLENUM
für motorisierten Rundklappen
Ø 150 - 200 - 250 - 300

CODE	Ø [mm]
C20000806	150
C20000807	200
C20000808	250
C20000809	300

Datasheet



PROAIR MULTI-ZONE

CE MADE IN ITALY

WHITE MOTORISED DELIVERY NOZZLE COMPLETE WITH GASKET FOR THE SYSTEM

TECHNICAL SPECIFICATIONS

- REMOVABLE MOTOR THAT CAN BE POSITIONED AT: 0° - 90° - 180° 270° - 360°
- MOUNTED USING STEEL CLIPS
- FLAPS WITH RUBBER GASKET FOR A COMPLETE SEAL

Made of white painted aluminium

GRILLE DE REFOULEMENT MOTORISÉE BLANCHE AVEC JOINT POUR SYSTÈME

CARACTÉRISTIQUES TECHNIQUES

- MOTEUR AMOVIBLE QUI PEUT ÊTRE POSITIONNÉ À : 0° - 90° - 180° 270° - 360 °C
- MONTAGE À L'AIDE DE CLIPS EN ACIER
- AILETTES AVEC JOINT EN CAOUTCHOUC POUR UNE ÉTANCHÉITÉ TOTALE

Fabriqué en aluminium peint en blanc

WEISSE MOTORISIERTE ZULUFTÖFFNUNG EINSCHLIESSLICH DICHTUNG FÜR DAS SYSTEM


TECHNISCHE EIGENSCHAFTEN

- ABNEHMBARER MOTOR, DER POSITIONIERT WERDEN KANN BEI: 0° - 90° - 180° 270° - 360 °C
- MONTAGE MIT STAHLCLIPS
- KLAPPEN MIT GUMMIDICHTUNG FÜR EINE VOLLSTÄNDIGE ABDICHTUNG


Aus weiß lackiertem Aluminium

For plenums see page 10 of the PROJEC TWIND catalog

ATTENTION! Use only tecnosystemi cables - do not use cables other than those indicated in order not to compromise the correct functioning of the system.




Closed flaps detail





Opened flaps detail


YouTube

VIDEO

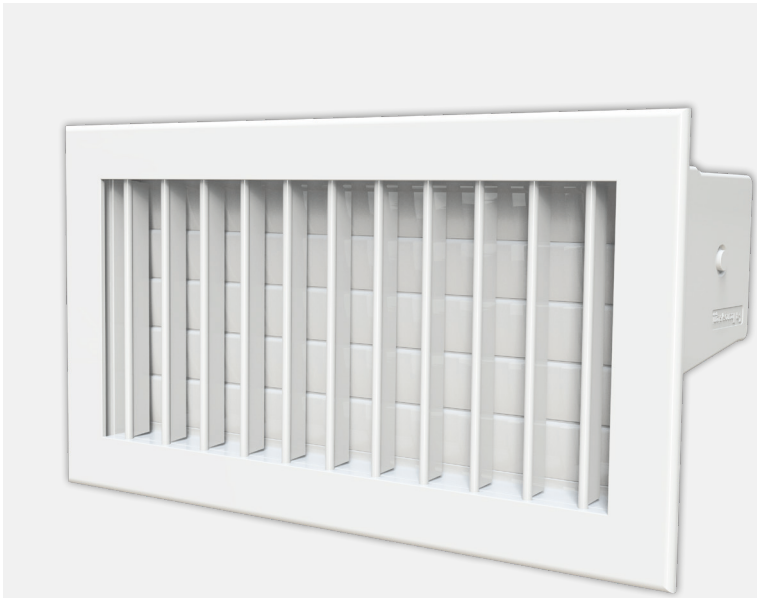



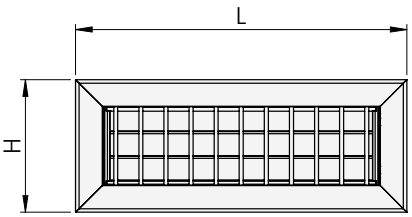



CODE	A	B	L	H	MAX AIR FLOW	SPEED
	[mm]	[mm]	[mm]	[mm]	[m³/h]	[m/s]
11181610	300	100	332	132	400	6,9
11181620	300	150	332	182	500	5,8
11181630	300	200	332	232	900	6,2
11181640	400	100	432	132	500	5,8
11181650	400	150	432	182	900	6,2
11181660	400	200	432	232	1200	6,8
11181670	500	100	532	132	700	6,2
11181680	500	150	532	182	1200	6,8

Datasheet

RELAY MODULE FOR RADIANT SYSTEMS AND FAN COILS

TECHNICAL SPECIFICATIONS

- CONNECTION TO SYSTEM WITH RJ45 PLUG CONNECTORS FOR 8-WIRE CABLES
- FASTENING ON DIN RAIL
- 2 MODULES DIMENSIONS W 70 X H 90 X D 62
- POWER SUPPLY 24 V DC
- 4 OUTPUT RELAYS
- 4 LEDS TO INDICATE THE STATUS OF THE RELAY
- LEDS FOR SIGNALLING AND DIAGNOSTICS
- INPUT FOR EXTERNAL TEMPERATURE SENSOR (TYPE NTC 10KΩ AT 25°C, NOT SUPPLIED)
- CONTACT RATING:
- - MAXIMUM RESISTIVE LOAD 8A AT 230 VAC
- - MAXIMUM INDUCTIVE LOAD 6A AT 230 VAC
- - MAXIMUM RESISTIVE LOAD 5A AT 30 VDC
- - MAXIMUM INDUCTIVE LOAD 3A AT 30 VDC

MODULE RELAIS POUR SYSTÈMES RADIANTS ET VENTILATEURS

CARACTÉRISTIQUES TECHNIQUES


- RACCORDEMENT AU SYSTÈME AVEC CONNECTEURS RJ45 POUR CÂBLES À 8 PÔLES
- FIXATION SUR RAIL DIN
- 2 MODULES DIMENSIONS L 70 X H 90 X P 62
- ALIMENTATION 24 VCC
- 4 RELAIS DE SORTIE
- 4 LED POUR L'INDICATION DE L'ÉTAT DU RELAIS
- LED POUR LA SIGNALISATION ET LE DIAGNOSTIC
- ENTRÉE POUR CAPTEUR DE TEMPÉRATURE EXTERNE (TYPE NTC 10KΩ À 25°C, NON FOURNI)
- CAPACITÉ DE CONTACT:
- - 8A À 230 VAC CHARGE RÉSISTIVE MAXIMALE
- - 6A À 230 VAC CHARGE INDUCTIVE MAXIMALE
- - 5A À 30 VDC CHARGE RÉSISTIVE MAXIMALE
- - 3A À 30 VDC CHARGE INDUCTIVE MAXIMALE


RELAISMODUL FÜR STRAHLUNGSSYSTEME UND LÜFTERSPULEN

TECHNISCHE EIGENSCHAFTEN

- ANSCHLUSS AN DAS SYSTEM MIT RJ45-STECKVERBINDERN FÜR 8-POLIGE KABEL
- BEFESTIGUNG AN DIN FÜHRUNG
- 2 ABMESSUNGEN MODULS L 70 X H 90 X T 62
- STROMVERSORGUNG 24 VDC
- 4 AUSGANGSRELAIS
- 4 LEDS ZUR STATUSANZEIGE DES RELAIS
- LED FÜR SIGNALISIERUNG UND DIAGNOSE
- EINGANG FÜR EXTERNEN TEMPERATURSENSOR (TYP NTC 10KΩ BEI 25°C, NICHT MITGELIEFERT)
- KONTAKTKAPAZITÄT:
- - 8 A BEI 230 VAC MAXIMALE OHMSCHE LAST
- - 6 A BEI 230 VAC MAXIMALE INDUKTIVE LAST
- - 5 A BEI 30 VDC MAXIMALER HEIZKÖRPERSLAST
- - 3 A BEI 30 VDC MAXIMALER INDUKTIVER LAST

WIRED CONNECTION EXAMPLES

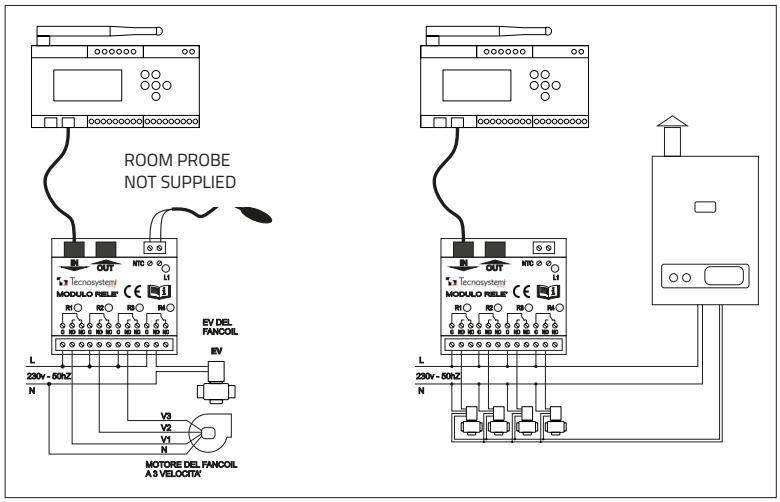

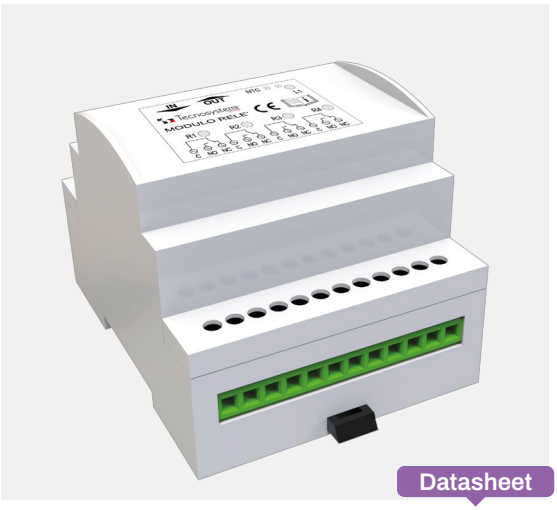

Datasheet

CODE	DESCRIPTION
11181407	RELAY MODULE FOR RADIANT SYSTEMS AND FAN COILS

CONSUMPTION METER FOR PROAIR SYSTEM

TECHNICAL SPECIFICATIONS

- 2 MODULES DIMENSIONS W 70 X H 90 X D 62
- FASTENING ON DIN RAIL
- RADIO FREQUENCY DATA TRANSMISSION WITH POLARIS 5X CONTROL UNIT
- CURRENT SENSOR SUPPLIED
- CONNECTION STATUS SIGNALLING LED

VERBRAUCHSZÄHLER FÜR PROAIR-SYSTEM

TECHNISCHE EIGENSCHAFTEN

- 2 ABMESSUNGEN MODULS L 70 X H 90 X T 62
- BEFESTIGUNG AN DIN FÜHRUNG
- HF-ÜBERTRAGUNG MIT DEN STEUERGERÄTEN POLARIS 5X
- STROMSENSOR IM LIEFERUMFANG ENTHALTEN
- LED-STATUSANZEIGELEUCHTE VERBINDUNG

MADE IN ITALY CE

COMPTEUR DE CONSOMMATION POUR LE SYSTÈME PROAIR

CARACTÉRISTIQUES TECHNIQUES

- 2 MODULES DIMENSIONS L 70 X H 90 X P 62
- FIXATION SUR RAIL DIN
- TRANSMISSION RF AVEC UNITÉS DE CONTRÔLE POLARIS 5X
- CAPTEUR DE COURANT FOURNI
- LED DE SIGNALISATION ÉTAT CONNEXION

All parameters can be viewed in the proair multi-zone app

Only for polaris 5x control unit



Datasheet

CODE	DESCRIPTION
GAD100014	CONSUMPTION METER FOR PROAIR SYSTEM

RADIO FREQUENCY WINDOW CONTACT FOR PROAIR SYSTEM

also prepared for wiring

TECHNICAL SPECIFICATIONS

- POWER SUPPLY CR2032 BATTERY (SUPPLIED AS STANDARD)
- RF TRANSMISSION WITH POLARIS 4X AND POLARIS 5X CONTROL UNITS
- RF MODULE AND MAGNET
- RF MODULE PROVIDED WITH TERMINAL FOR MANAGEMENT OF A WIRED WINDOW CONTACT
- RED WINDOW OPEN LED
- CONFIGURABLE USING POLARIS CONTROL UNITS FOR BADGE
- OPENING OF THE CONTACT INVOLVES:
  - CLOSURE OF THE DAMPER AND/OR OPENING OF THE ZONE SOLENOID VALVES
  -THE INDICATION ON THE CHRONOTHERMOSTAT DISPLAY INDICATION IN MULTIZONE PROAIR APPLICATION
- FASTENING BY MEANS OF DOUBLE-SIDED ADHESIVE SUPPLIED
- RF TRANSMITTER MODULE DIMENSIONS 28.8 X 95.3 X 20
- MAGNET DIMENSIONS 18 X 33 X 11 MM

CONTACT DE FENÊTRE EN FRÉQUENCE RADIO POUR SYSTÈME PROAIR

également prédisposé pour le câblage

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION PAR BATTERIE CR2032 (FOURNIE DE SÉRIE)
- TRANSMISSION RF AVEC UNITÉS DE CONTRÔLE POLARIS 4X ET POLARIS 5X
- COMPOSÉE D'UN MODULE RF ET D'UN AIMANT
- MODULE RF MUNI D'UNE BORNE POUR LA GESTION D'UN CONTACT DE FENÊTRE CÂBLÉ
- LED DE SIGNALISATION ROUGE À FENÊTRE OUVERTE
- CONFIGURABLE À PARTIR DES UNITÉS DE COMMANDE POLARIS POUR LA GESTION DES BADGES
- L'OUVERTURE DU CONTACT IMPLIQUE:
  - LA FERMETURE DU REGISTRE ET/OU L'OUVERTURE DES ÉLECTROVANNES DE LA ZONE
  - L'INDICATION SUR L'AFFICHAGE DU THERMOSTAT PROGRAMMABLE
  - INDICATION DANS L'APPLICATION PROAIR MULTI-ZONE
- FIXATION PAR ADHÉSIF DOUBLE FACE FOURNI
- DIMENSIONS DU MODULE D'ÉMETTEUR RF 28,8 X 95,3 X 20 MM
- TAILLE DE L'AIMANT : 18 X 33 X 11 MM

HOCHFREQUENZ-FENSTER-KONTAKT FÜR PROAIR-SYSTEM

auch für Verdrahtung ausgelegt


TECHNISCHE EIGENSCHAFTEN

- CR2032 BATTERIEVERSORGUNG (SERIENMÄSSIG IM LIEFERUMFANG ENTHALTEN)
- HF-ÜBERTRAGUNG MIT DEN STEUERGERÄTEN POLARIS 4X UND POLARIS 5X
- BESTEHEND AUS RF-MODUL UND MAGNET
- RF-MODUL MIT EINEM TERMINAL ZUR VERWALTUNG EINES VERDRAHTETEN FENSTERKONTAKTS
- ROTE LED SIGNALISIERUNG OFFENES FENSTER
- KONFIGURIERBAR DURCH POLARIS STEUERGERÄTE ZUR BADGE-VERWALTUNG
- DAS ÖFFNEN DES KONTAKTS BEINHALTET:
  - SCHLIESSEN DER KLAPPE UND/ODER ÖFFNEN DER ZONENELEKTROVENTILE
  - ANZEIGE AUF DEM DISPLAY DES CHRONO-THERMOSTATS
  - ANZEIGE IN DER ANWENDUNG PROAIR MULTI-ZONE
- MONTAGE MIT MITGELIEFERTEN DOPPELSEITIGEN KLEBER
- ABMESSUNGEN DES HF-SENDEMODULS 28,8 X 95,3 X 20 MM
- MAGNETGRÖSSE: 18 X 33 X 11 MM


Datasheet



Example with rf transmitter module

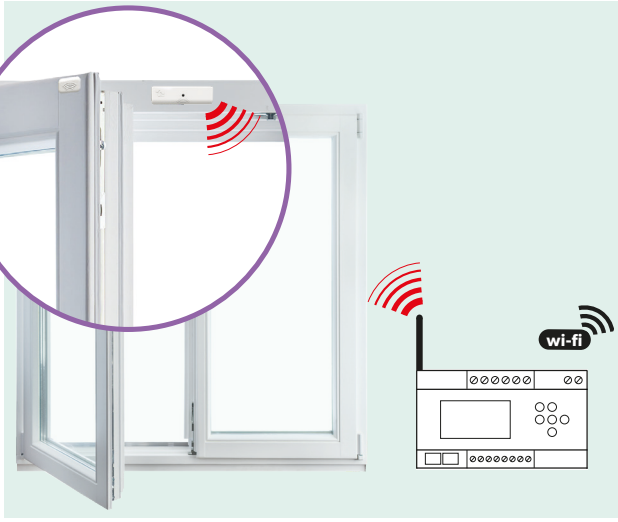

Example with rf transmitter module with wiring

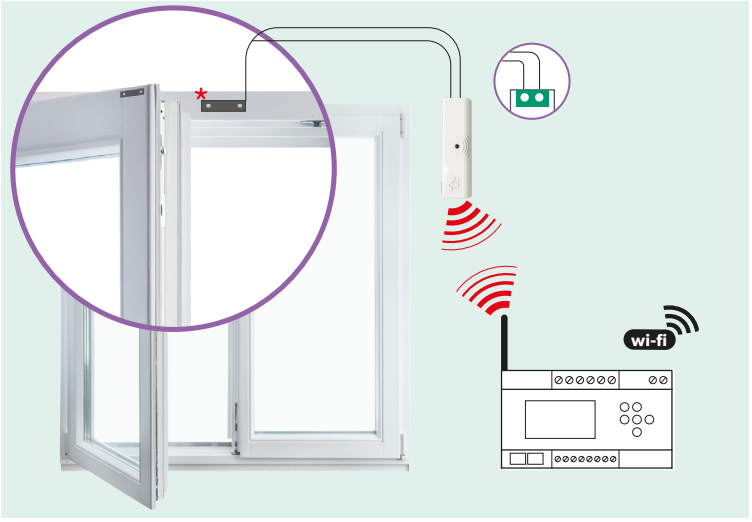

INSTALLATION WITH RF TRANSMITTER

Application recommended for wireless installation. In this mode, the rf transmitter or multiple rf transmitters associated with a zone, transmit directly to the control unit.

WIRED INSTALLATION WITH RF TRANSMITTER

Recommended application when the rf transmitter and the polaris control unit are out of rf range. A wired window contact (not supplied by tecnosystemi), will be connected to the terminal board available in the radio module of the rf transmitter which will send the signal for opening or closing of the window via rf to the control unit.

CODE	DESCRIPTION
GAD400254	RADIO FREQUENCY WINDOW CONTACT FOR PROAIR SYSTEM

LABELLED CONNECTION CABLE 8 POLES

TECHNICAL SPECIFICATIONS

- CABLE IN ACCORDANCE WITH EN 13602
- RJ45 PLUG CONNECTORS
- LENGTHS FROM 0.5 - 1 - 3 - 6 - 10 M
- 8-POLE TELEPHONE CABLE

CÂBLE DE CONNEXION EN TÊTE 8 PÔLES

CARACTÉRISTIQUES TECHNIQUES

- CÂBLE CONFORME À LA NORME EN 13602
- CONNECTEURS ENFICHABLES RJ45
- LONGUEURS DE 0,5 - 1 - 3 - 6 - 10 M
- CÂBLE TÉLÉPHONIQUE À 8 PÔLES

TERMINIERTES AN-SCHLUSSKABEL 8-POLIG


TECHNISCHE EIGENSCHAFTEN

- KABEL NACH EN 13602
- RJ45-STECKVERBINDER
- LÄNGEN VON 0,5 - 1 - 3 - 6 - 10 M
- 8-POLIGES TELEFONKABEL

FOR PROAIR MULTI-ZONE SYSTEMS

ATTENTION! Use only Tecnosystemi cables - do not use cables other than those indicated in order not to compromise the correct functioning of the system.

CE

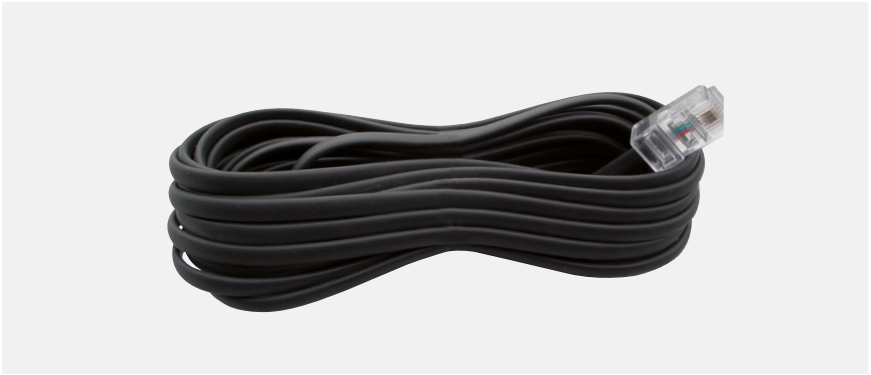

CODE	DESCRIPTION
11181710	LABELLED CONNECTION CABLE RJ45 0,5 m
11181720	LABELLED CONNECTION CABLE RJ45 1 m
11181730	LABELLED CONNECTION CABLE RJ45 3 m
11181740	LABELLED CONNECTION CABLE RJ45 6 m
11181750	LABELLED CONNECTION CABLE RJ45 10 m

Datasheet

SKEIN CONNECTION CABLE 8 POLES

TECHNICAL SPECIFICATIONS

- CABLE IN ACCORDANCE WITH EN 13602
- 100 M REEL
- 8-POLE TELEPHONE CABLE

CÂBLE DE CONNEXION À BROCHE 8 PÔLES

CARACTÉRISTIQUES TECHNIQUES

- CÂBLE CONFORME À LA NORME EN 13602
- BOBINE DE 100 M
- CÂBLE TÉLÉPHONIQUE À 8 PÔLES

ANSCHLUSSKABEL AUF SPU-LE 8-POLIG

TECHNISCHE EIGENSCHAFTEN

- KABEL NACH EN 13602
- 100 M STRANG
- 8-POLIGES TELEFONKABEL

FOR PROAIR MULTI-ZONE SYSTEMS

100 m

ATTENTION! Use only Tecnosystemi cables - do not use cables other than those indicated in order not to compromise the correct functioning of the system.

CE



Datasheet

CODE	DESCRIPTION
11181760	SKEIN CONNECTION CABLE 8 POLES

100 M SKEIN CONNECTION CABLE 4 POLES

TECHNICAL SPECIFICATIONS

- 4 X 0.22 SHIELDED CABLE
- 100 M REEL
- 4-POLE CABLE

CÂBLE DE CONNEXION EN ÉCHEVEAU 100 M 4 PÔLES

CARACTÉRISTIQUES TECHNIQUES

- CÂBLE 4 X 0,22 BLINDÉ
- BOBINE DE 100 M
- CÂBLE À 4 PÔLES


ANSCHLUSSKABEL AUF 100-M-SPULE 4-POLIG

TECHNISCHE EIGENSCHAFTEN

- 4 X 0,22 ABGESCHIRMTES KABEL
- 100 M STRANG
- 4-POLIGES KABEL

Datasheet

FOR BUILT-IN WIRED BACKLIT STEALTH 3X THERMOSTAT





CODE	DESCRIPTION
11181764	100 M SKEIN CONNECTION CABLE - 4 POLES

TSTC1

CE

NETWORK CABLE TESTER

TECHNICAL SPECIFICATIONS

- SUITABLE FOR TESTING ON RJ45 TYPE CABLES
- SUITABLE FOR COAXIAL CABLE TESTING

TESTEUR DE CÂBLE RÉSEAU

CARACTÉRISTIQUES TECHNIQUES

- CONVIENT POUR LES ESSAIS SUR LES CÂBLES DE TYPE RJ45
- CONVIENT POUR LES ESSAIS SUR LES CÂBLES COAXIAUX

NETZWERKKABELTESTER

TECHNISCHE EIGENSCHAFTEN

- GEEIGNET ZUM TESTEN VON KABELN DES TYPS RJ45
- GEEIGNET FÜR DIE PRÜFUNG VON KOAXIALKABELN

Datasheet



CODE	DESCRIPTION
11132600	TSTC1 NETWORK CABLE TESTER

RJ45 CONNECTOR FOR 8-PIN CONNECTION CABLES

CONNECTEUR RJ45 POUR CÂBLES 8 PÔLES


RJ45-STECKVERBINDER FÜR 8-POLIGE

FOR PROAIR MULTI-ZONE SYSTEMS

CE

- **RJ45 CONNECTOR FOR 8-PIN CABLES**
- **100-PIECES PACK**

Datasheet

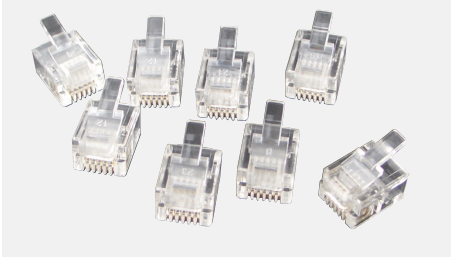

CODE	DESCRIPTION
11181770	RJ45 CONNECTOR FOR 8-PIN CONNEC-TION CABLES 100 PIECES PACK

MECHANICAL CIRCULAR BYPASS Ø 200

DÉRIVATION CIRCULAIRE MÉCANIQUE Ø 200

MECHANISCHER KREISFÖRMIGER BYPASS Ø 200

SUITABLE FOR PLENUM EOLO - EOLO MINI



Datasheet

CODE	DESCRIPTION
GAD300006	MECHANICAL CIRCULAR BYPASS Ø 200 FOR PLENUM EOLO - EOLO MINI

MECHANICAL DOOR BY PASS

DÉRIVATION MÉCANIQUE À PORTE

MECHANISCHER BYPASS

OR METAL AND POLYURETHANE FOAM (PAL) PLENUMS



Datasheet

CODE	DESCRIPTION
GAD400201	MECHANICAL DOOR BYPASS

RECTANGULAR / CIRCULAR MECHANICAL BYPASS

DÉRIVATION MÉCANIQUE RECTANGULAIRE / CIRCULAIRE


RECHTECKIGER / KREISFÖRMIGER MECHANISCHER BYPASS



Datasheet

RECTANGULAR BYPASS

CODE	LENGTH [mm]	HEIGHT [mm]	MAX AIR FLOW RATE [m³/h]
11161295	400	150	860
11161296	400	200	1150

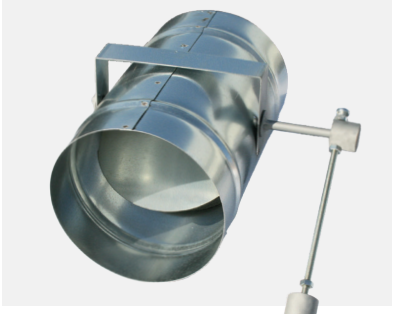

Datasheet

CIRCULAR BYPASS

CODE	LENGTH [mm]	HEIGHT [mm]	MAX AIR FLOW RATE [m³/h]
11161297	150	250	388
11161298	200	300	670

CONGIFURE YOUR PROAIR PACK

CONFIGURE YOUR SISTEM

SUL SITO WWW.TECNOSYSTEMI.COM

Generate an automatic

QUOTATION and the **DATA SHEET**

of the chosen products

proAIR® multi-zone



TRY IT

ATTENTION: in the configurator are available also Proair Pack products

CONFIGURE YOUR PROAIR PACK IDRONICO

CONFIGURE YOUR SISTEM

SUL SITO WWW.TECNOSYSTEMI.COM

Generate an automatic

QUOTATION and the **DATA SHEET**

of the chosen products




TRY IT

CONFIGURE YOUR SYSTEM WITH ALL THE LOOSE ELEMENTS OF THE PROAIR SYSTEM

CONFIGURE YOUR SYSTEM
ON THE WEBSITE WWW.TECNOSYSTEMI.COM

NEW

Generate an automatic
QUOTATION and the **DATA SHEET**
of the chosen products

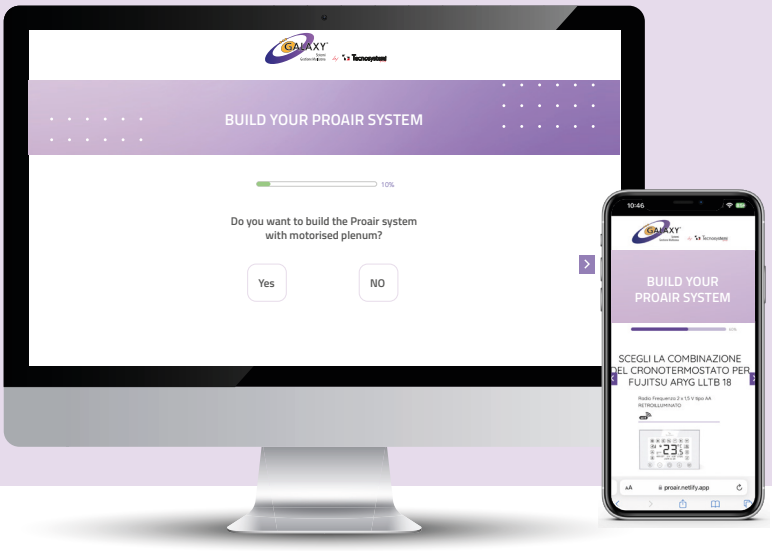

TRY IT

DON'T MISS THE OPPORTUNITY TO GET THE MOST OUT OF YOUR SYSTEM.

Do you need advanced solutions for your Proair system?

Follow the Tecnosystemi page on YouTube!

Visit our YouTube channel **for informative videos and in-depth tutorials** on how to get the most out of your Proair system.

We take you step-by-step through the **features and benefits of our system**to help you get the most out of it.

We will also**keep you up to date** with the latest innovations in the industry and **give you valuable tips on how to optimise the performance of your Proair system.**

YouTube



HOW TO CHOOSE YOUR PROAIR PACK

COMMENT CHOISIR LE BON PACK PROAIR POUR VOUS

WIE WÄHLEN SIE DAS FÜR SIE RICHTIGE PROAIR PACK AUS

POLARIS 5X with colour display, wi-fi communication protocols and Alexa app - Google Home



CHRONO-THERMOSTATS WITH RADIO FREQUENCY




PLENUM EOLO MINI		
N° ZONE	Ø COLLAR	PAGE
3	da Ø 125 / 150	Pag.30
4	da Ø 125 / 150	Pag.32

PLENUM EOLO		
N° ZONE	Ø COLLAR	PAGE
2	da Ø 150 / 200	Pag.28
3	da Ø 150 / 200	Pag.30
4	da Ø 150 / 200	Pag.32
5	da Ø 150 / 200	Pag.34
6	da Ø 150 / 200	Pag.36

METAL SHEET PLENUM/PAL*		
N° ZONE	Ø COLLAR	PAGE
2	da Ø 150	Pag.29
	da Ø 200	Pag.29
3	da Ø 150	Pag.31
	da Ø 200	Pag.31
4	da Ø 150	Pag.33
	da Ø 200	Pag.33
5	da Ø 150	Pag.35
	da Ø 200	Pag.35
6	da Ø 150	Pag.37
	da Ø 200	Pag.37

WIRED CHRONO-THERMOSTATS



PLENUM EOLO MINI		
N° ZONE	Ø COLLAR	PAGE
3	da Ø 125 / 150	Pag.40
4	da Ø 125 / 150	Pag.42

PLENUM EOLO		
N° ZONE	Ø COLLAR	PAGE
2	da Ø 150 / 200	Pag.40
3	da Ø 150 / 200	Pag.40
4	da Ø 150 / 200	Pag.42
5	da Ø 150 / 200	Pag.42
6	da Ø 150 / 200	on request

METAL SHEET PLENUM/PAL*		
N° ZONE	Ø COLLAR	PAGE
2	da Ø 150	Pag.41
	da Ø 200	Pag.41
3	da Ø 150	Pag.41
	da Ø 200	Pag.41
4	da Ø 150	Pag.43
	da Ø 200	Pag.43
5	da Ø 150	Pag.43
	da Ø 200	Pag.43
6	da Ø 150	Pag.44
	da Ø 200	Pag.44


*** Polyurethane foam pal available on request**

CONTENTS OF "PROAIR - RF" PACK KITS

ATTENTION: ALL PROAIR PACKS ARE TESTED AND CONFIGURED, READY TO BE INSTALLED. MATCHING BETWEEN CHRONO-THERMOSTATS AND DAMPERS IS IDENTIFIED BY NUMBERING.

proAIR® pack RF


Radio frequency (RF) proair pack plenum eolo / eolo mini



1 PC.
SINTERED POLYSTYRENE DELIVERY PLENUM FOR DUCTED UNITS (SPECIFY THE PLENUM CODE WHEN ORDERING)

MECHANICAL BYPASS KIT TO BE FASTENED TO RIGHT OR LEFT SIDE OF PLENUM (INCLUDES FASTENING RING NUT AND COUNTERWEIGHT)

PAG. 45




1 PC.
POLARIS 5X CONTROL UNIT WITH COLOUR DISPLAY, INCORPORATED PROTOCOLS AND APP, ALEXA E GOOGLE HOME

PAG. 13-15




ACCORDING TO THE QUANTITY OF ZONES
CHRONO-THERMOSTATS (COLOUR: WHITE)
CHOOSE AMONG THE PROPOSED SOLUTION: A, B, C

PAG. 9-12



ACCORDING TO THE QUANTITY OF ZONES
MOTORIZED DAMPERS INTEGRATED ON PLENUM


Proair pack RF insulated metal sheet / polyurethane foam (PAL)



NR.1
INSULATED INLET PLENUM FOR DUCTED UNITS (SPECIFY THE PLENUM CODE WHEN ORDERING)

POLYURETHANE FOAM PAL AVAILABLE ON REQUEST

PAG. 45




1 PC.
POLARIS 5X CONTROL UNIT WITH COLOUR DISPLAY, INCORPORATED PROTOCOLS AND APP, ALEXA E GOOGLE HOME

PAG. 13-15



ACCORDING TO THE QUANTITY OF ZONES
CHRONO-THERMOSTATS (COLOUR: WHITE)
CHOOSE AMONG THE PROPOSED SOLUTION: A, B, C - A1,B1, C1

PAG. 9-12



ACCORDING TO THE QUANTITY OF ZONES
MOTORIZED DAMPERS INTEGRATED ON PLENUM *

THE PROAIR PACK MAY BE CUSTOMIZED WITH DAMPERS HAVING DIFFERENT DIAMETERS.

ATTENTION: A CLEAN ON/OF CONTACT CAN BE USED IF AN INFRARED RECEIVER IS NOT AVAILABLE (CHECK WITH THE DUCTED MANUFACTURER WHETHER THE MACHINE NEEDS A SUITABLE INTERFACE).

proAIR® RF redpack2 EOLO


2 ZONE WITH PLENUM IN POLYSTYRENE "EOLO" Ø150/200 mm



amazon alexa

Google Home


With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

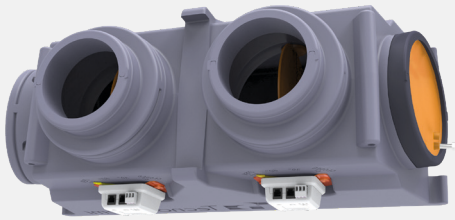


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 2 DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400359	PROAIR PACK RF RED 2 - WITH SINTERED POLYSTYRENE PLENUM WITH 2 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150/200 m m	150/200mm

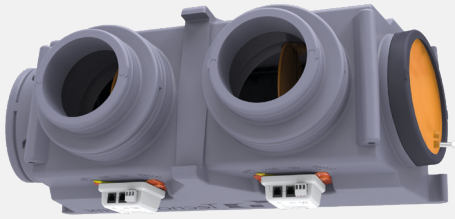


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 1 MINI DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400360	PROAIR PACK RF RED 2 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 1 CHRONO-THERMOSTAT MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

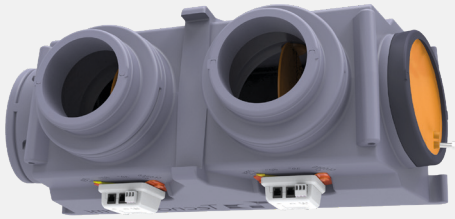

INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 1 ROOM PROBE LEM 3X



CODE	DESCRIPTION	COUPLING Ø
GAD400409	PROAIR PACK RF RED 2 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 1 ROOM PROBE LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)

Datasheet

proAIR® RF redpack2L


2 ZONE WITH INSULATED METAL SHEET PLENUM



amazon alexa

Google Home


With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

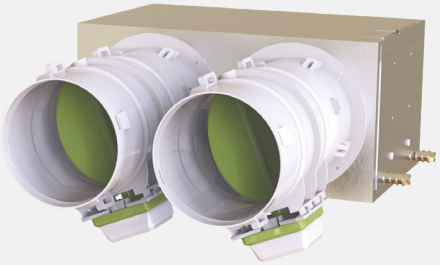




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 2 DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400379	PROAIR PACK RF RED 2 L - WITH 2 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400380	PROAIR PACK RF RED 2 L - WITH 2 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

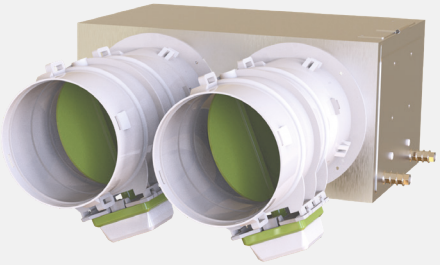




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 1 MINI DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400385	PROAIR PACK RF RED 2 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 1 CHRONO-THERMOSTAT MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400386	PROAIR PACK RF RED 2 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 1 CHRONO-THERMOSTAT MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

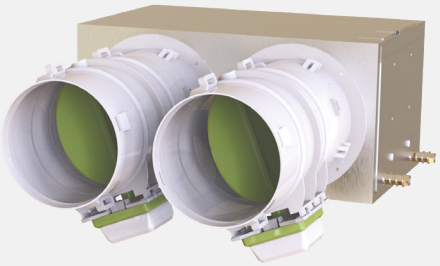



N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 1 ROOM PROBE LEM 3X



CODE	DESCRIPTION	DAMPERS Ø
GAD400416	PROAIR PACK RF RED 2 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 1 ROOM PROBE LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400417	PROAIR PACK RF RED 2 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 1 ROOM PROBE LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm


Datasheet

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)


proAIR® RF blupack3 EOLO/EOLO MINI

3 ZONE WITH PLENUM IN POLYSTYRENE "EOLO-MINI" Ø125/150 mm

3 ZONE WITH PLENUM IN POLYSTYRENE "EOLO" Ø125/150 mm




With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

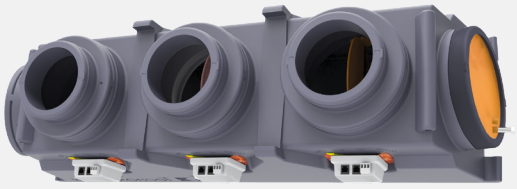


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 3 DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400361	PROAIR PACK RF BLUE 3 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 3 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150 mm
GAD400362	PROAIR PACK RF BLUE 3 - WITH SINTERED POLYSTYRENE PLENUM WITH 3 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200 mm

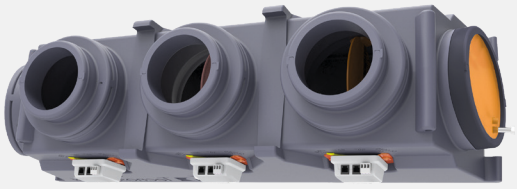


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 2 MINI DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400363	PROAIR PACK RF BLUE 3 - WITH SINTERED POLYSTYRENE PLENUM MINI WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150 mm
GAD400364	PROAIR PACK RF BLUE 3 - WITH SINTERED POLYSTYRENE PLENUM WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200 mm

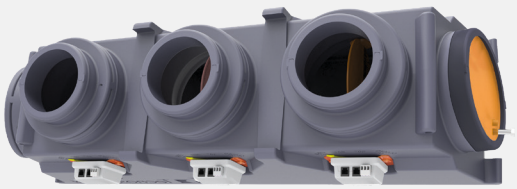

INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 2 ROOM PROBE LEM 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400410	ROAIR PACK RF BLUE 3 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø125/150 m	125/150 mm
GAD400411	PROAIR PACK RF BLUE 3 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200 mm

Datasheet


The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)

proAIR® RF blupack3L

3 ZONE WITH INSULATED METAL SHEET PLENUM




With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

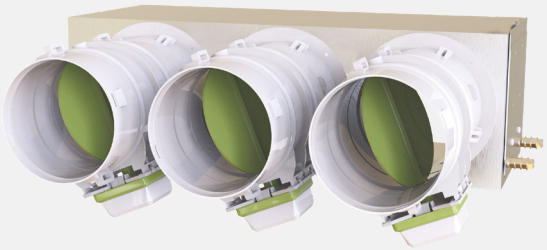




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 3 DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400381	PROAIR PACK RF BLUE 3 L - WITH 3 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400382	PROAIR PACK RF BLUE 3 L - WITH 3 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

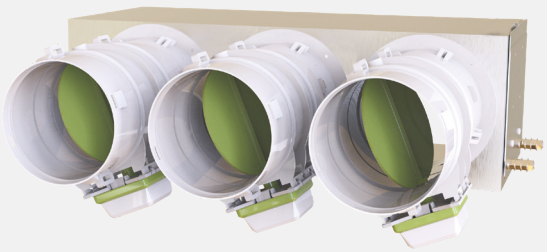




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 2 MINI DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400387	ROAIR PACK RF BLUE 3 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 CHRONO-pTHERMO-STATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400388	PROAIR PACK RF BLUE 3 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 CHRONO-THERMO-STATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

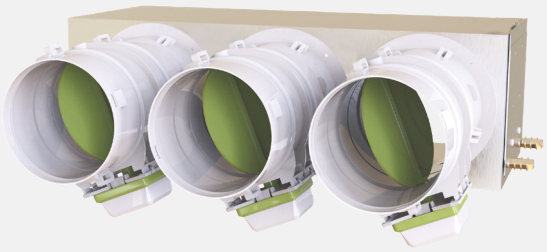



N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 2 ROOM PROBE LEM 3X



CODE	DESCRIPTION	DAMPERS Ø
GAD400418	PROAIR PACK RF BLUE 3 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400419	PROAIR PACK RF BLUE 3 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 2 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)

Datasheet

proAIR® RF
ambrapack4 EOLO/ EOLO MINI

4 ZONE WITH PLENUM IN POLYSTYRENE "EOLO-MINI" Ø125/150 mm

4 ZONE WITH PLENUM IN POLYSTYRENE "EOLO" Ø150/200 mm




amazon alexa

Google Home

Virtual reality

3D


With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

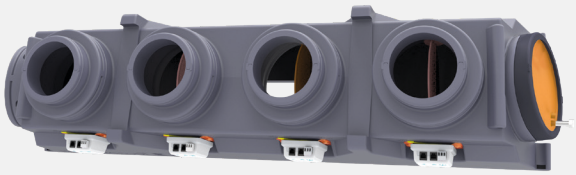


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 4 DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400365	PROAIR PACK RF AMBRA 4 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 4 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150 mm
GAD400366	PROAIR PACK RF AMBRA 4 - WITH SINTERED POLYSTYRENE PLENUM - WITH 4 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200 mm

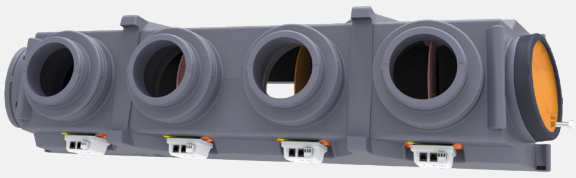


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 3 MINI DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400367	PROAIR PACK RF AMBRA 4 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150 mm
GAD400368	PROAIR PACK RF AMBRA 4 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200 mm

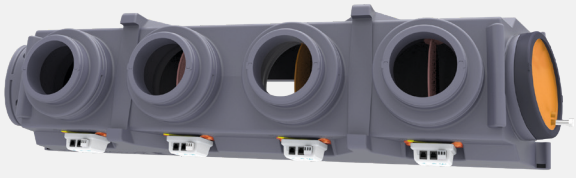

INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 3 ROOM PROBE LEM 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400412	PROAIR PACK RF AMBRA 4 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150 mm
GAD400413	PROAIR PACK RF AMBRA 4 - WITH SINTERED POLYSTYRENE PLENUM WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200 mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)


Datasheet

proAIR® RF ambrapack4L

4 ZONE WITH INSULATED METAL SHEET PLENUM




With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

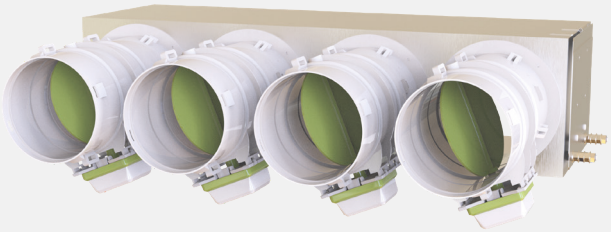




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 4 DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400383	PROAIR PACK RF AMBRA 4 L - WITH 4 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400384	PROAIR PACK RF AMBRA 4 L - WITH 4 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

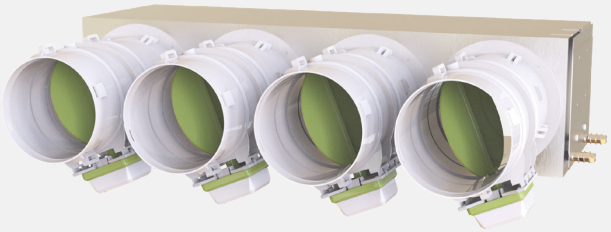




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 3 MINI DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400389	PROAIR PACK RF AMBRA 4 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400390	PROAIR PACK RF AMBRA 4 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

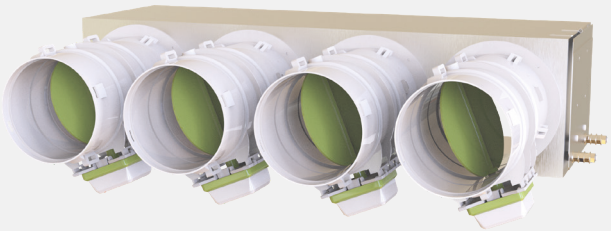



N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 3 ROOM PROBE LEM 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400420	PROAIR PACK RF AMBRA 4 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150mm	150 mm
GAD400421	PROAIR PACK RF AMBRA 4 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 3 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)


Datasheet

proAIR® RF pinkpack5 EOLO

5 ZONE WITH PLENUM IN POLYSTYRENE "EOLO-MINI" 150/200 mm




With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

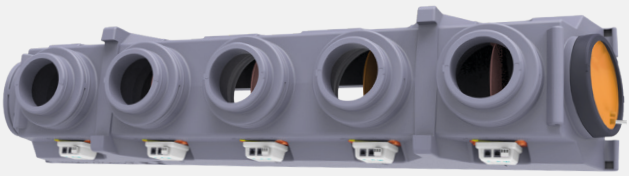


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 5 DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400369	PROAIR PACK RF PINK 5 - WITH SINTERED POLYSTYRENE PLENUM - WITH 5 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

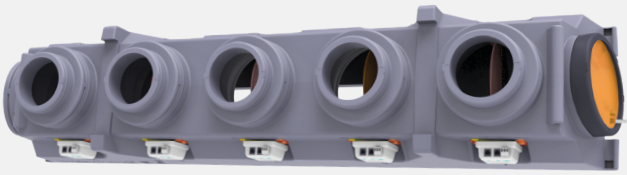


INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 4 MINI DISCOVERY 3X




CODE	DESCRIPTION	COUPLING Ø
GAD400370	PROAIR PACK RF PINK 5 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 4 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

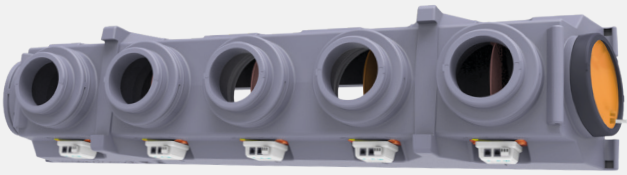

INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 4 ROOM PROBE LEM 3X



CODE	DESCRIPTION	COUPLING Ø
GAD400414	PROAIR PACK RF PINK 5 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 4 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)

Datasheet

proAIR® RF pinkpack5L


5 ZONE WITH INSULATED METAL SHEET PLENUM



amazon alexa

Google Home


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

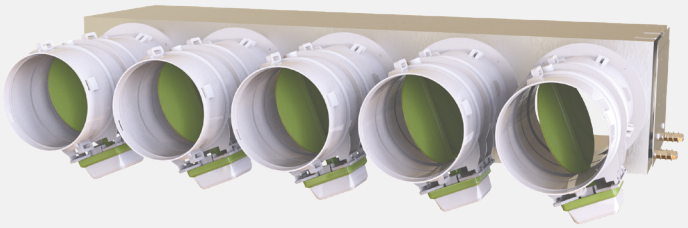




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 5 DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400391	PROAIR PACK RF PINK 5 L - WITH 5 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400392	PROAIR PACK RF PINK 5 L - CON 5 CRONOTERMOSTATI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

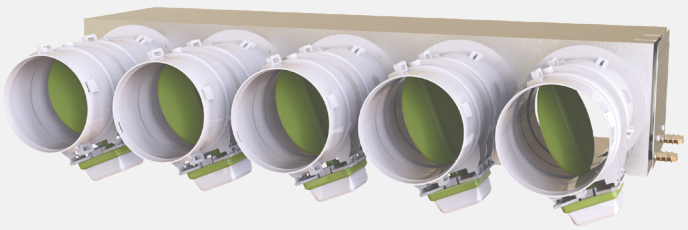




N.B. PER ELENCO DEI COMPONENTI DEL KIT VEDERE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 4 MINI DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400393	PROAIR PACK RF PINK 5 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 4 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400394	PROAIR PACK RF PINK 5 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 4 CHRONO-THERMO-STATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

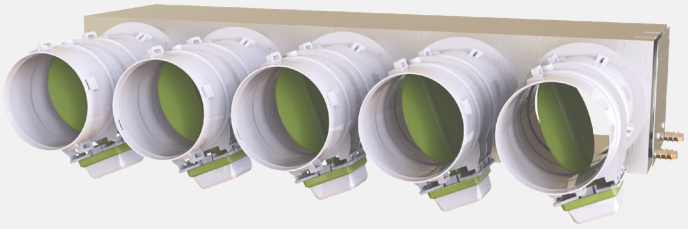



N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 4 ROOM PROBE LEM 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400422	PROAIR PACK RF PINK 5 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 4 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400423	PROAIR PACK RF PINK 5 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 4 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)


Datasheet

proAIR® RF brownpack6EOLO

6 ZONE WITH PLENUM
IN POLYSTYRENE Ø150/200 mm




With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

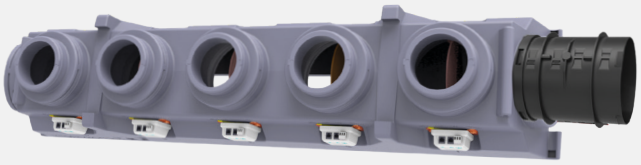

INCLUDING BY-PASS KIT


N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 6 DISCOVERY 3X



SIDE DAMPER Ø200. ON DEMAND Ø150.


CODE	DESCRIPTION	COUPLING Ø
GAD400371	PROAIR PACK RF BROWN 6 - WITH SINTERED POLYSTYRENE PLENUM - WITH 6 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

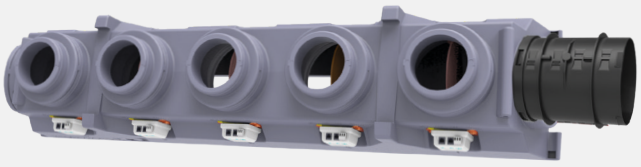

INCLUDING BY-PASS KIT


N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 4 MINI DISCOVERY 3X



SIDE DAMPER Ø200. ON DEMAND Ø150.


CODE	DESCRIPTION	COUPLING Ø
GAD400372	PROAIR PACK RF BROWN 6 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS + 5 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

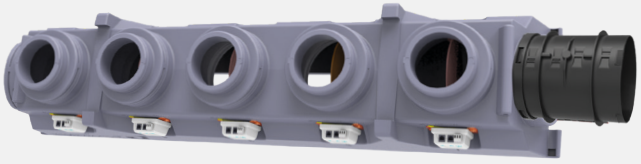

INCLUDING BY-PASS KIT

N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 5 ROOM PROBE LEM 3X



SIDE DAMPER Ø200. ON DEMAND Ø150.


CODE	DESCRIPTION	COUPLING Ø
GAD400415	PROAIR PACK RF BROWN 6 - WITH SINTERED POLYSTYRENE PLENUM - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 5 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)


Datasheet

proAIR® RF brownpack6L

6 ZONE WITH INSULATED METAL SHEET PLENUM




With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

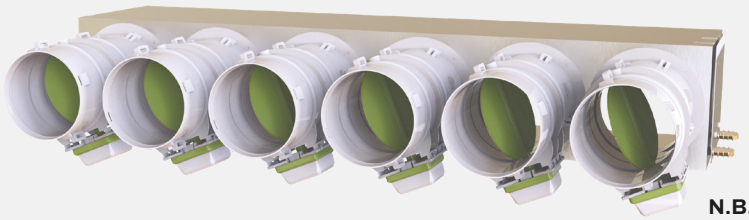




N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 6 DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400395	PROAIR PACK RF BROWN 6 L - WITH 6 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400396	PROAIR PACK RF BROWN 6 L - WITH 6 DISCOVERY 3X BACKLIT CHRONO-THERMOSTATS - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

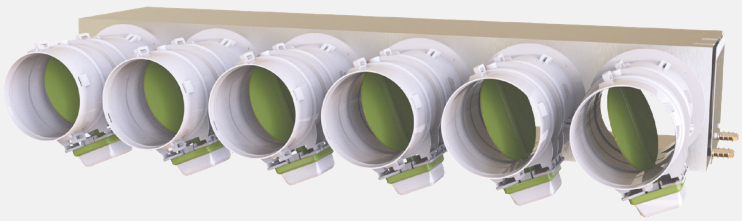




N.B. PER ELENCO DEI COMPONENTI DEL KIT VEDERE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 5 MINI DISCOVERY 3X




CODE	DESCRIPTION	DAMPERS Ø
GAD400397	PROAIR PACK RF BROWN 6 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 5 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400398	PROAIR PACK RF BROWN 6 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 5 CHRONO-THERMOSTATS MINI DISCOVERY 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

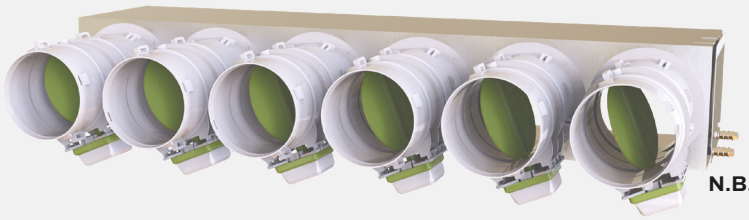



N.B. FOR KIT COMPONENTS LIST SEE PAG. 27

Nr. 1 DISCOVERY 3X
Nr. 5 ROOM PROBE LEM 3X



CODE	DESCRIPTION	DAMPERS Ø
GAD400424	PROAIR PACK RF BROWN 6 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 5 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400425	PROAIR PACK RF BROWN 6 L - WITH 1 DISCOVERY 3X BACKLIT CHRONO-THERMOSTAT + 5 ROOM PROBES LEM 3X RF - WITH POLARIS 5X CONTROL UNIT - Ø200mm	200 mm

The plenum for duct units is included.
(Please, in time of order specify code of plenum, see from pag.45)

Datasheet

Ssytem Start-up and After-Sales Technical Service PROAIR Portal

Tecnosystemi's technical after-sales service uses the ***'Proair Portal'***.

The portal allows remote monitoring of the operating status of Proair systems used by customers through the APP: the service is provided in full respect of privacy.



This portal allows:

The user to check the App configuration result on the platform da parte del utilizzatore

The remote verification of the update status of Proair systems

Supporting the customer of Tecnosystemi's customer support service before carrying out an intervention on-site to resolve an issue or an error in the system

Notifying any activities carried out in remote mode or by the customer support service to ensure the correct operation of the system.

Tecnosystemi offers you the *first start-up of the Proair system*

Our qualified service centre is at your disposal

Call the following number

Numero Verde
800 904474

One of our operators will guide you and give you all the necessary information about the service and prices

NEW

SCAN THE QR CODE TO SEE THE START-UP SERVICE RATES FOR THE PROAIRSYSTEM


N.B: Start-up of the Proair system is not mandatory

CONTENTS OF "PROAIR" PACK KITS (CAB)

ATTENTION: ALL PROAIR PACKS ARE TESTED AND CONFIGURED, READY TO BE INSTALLED. MATCHING BETWEEN CHRONO-THERMOSTATS AND DAMPERS IS IDENTIFIED BY NUMBERING.


proAIR® pack CAB

Proair pack cab plenum eolo / eolo mini



1 PC.
SINTERED POLYSTYRENE DELIVERY PLENUM FOR DUCTED UNITS (SPECIFY THE PLENUM CODE WHEN ORDERING)
MECHANICAL BY PASS KIT TO BE FASTENED TO RIGHT OR LEFT SIDE OF PLENUM (INCLUDES FASTENING RING NUT AND COUNTERWEIGHT)

PAG. 45




1 PC.
POLARIS 5X CONTROL UNIT WITH INCORPORATED PROTOCOLS AND APP OR POLARIS 5X CONTROL UNIT WITH COLOUR DISPLAY, INCORPORATED PROTOCOLS AND APP, ALEXA E GOOGLE HOME

PAG. 13-15




ACCORDING TO THE QUANTITY OF ZONES
"STEALTH 3X" CHRONO-THERMOSTATS

PAG. 11




ACCORDING TO THE QUANTITY OF ZONES
MOTORIZED DAMPERS INTEGRATED ON PLENUM
KIT 2 - 3 - 4 ZONE: 50 M SKEIN CONNECTION CABLE
KIT 5 ZONE: 100 M SKEIN CONNECTION CABLE
4-WIRE FOR TIMED THERMOSTAT CONNECTION

Proair pack cab insulated metal sheet / polyurethane foam (PAL)



NR.1
INSULATED INLET PLENUM FOR DUCTED UNITS (SPECIFY THE PLENUM CODE WHEN ORDERING)
MECHANICAL BY PASS KIT TO BE FASTENED TO PLENUM (INCLUDES FASTENING RING NUT AND COUNTERWEIGHT)

PAG. 45




1 PC.
POLARIS 5X CONTROL UNIT WITH INCORPORATED PROTOCOLS AND APP OR POLARIS 5X CONTROL UNIT WITH COLOUR DISPLAY, INCORPORATED PROTOCOLS AND APP, ALEXA E GOOGLE HOME

PAG. 13-15



ACCORDING TO THE QUANTITY OF ZONES
"STEALTH 3X" CHRONO-THERMOSTATS

PAG. 11




ACCORDING TO THE QUANTITY OF ZONES
MOTORIZED DAMPERS INTEGRATED ON PLENUM *
KIT 2 - 3 - 4 ZONE: 50 M SKEIN CONNECTION CABLE
KIT 5 ZONE: 100 M SKEIN CONNECTION CABLE
4-WIRE FOR TIMED THERMOSTAT CONNECTION


ATTENTION: A CLEAN ON/OF CONTACT CAN BE USED IF AN INFRARED RECEIVER IS NOT AVAILABLE (CHECK WITH THE DUCTED MANUFACTURER WHETHER THE MACHINE NEEDS A SUITABLE INTERFACE).

proAIR® CAB greenpack2 EOLO

2 ZONE WITH PLENUM IN POLYSTYRENE
EOLO Ø150/200 mm

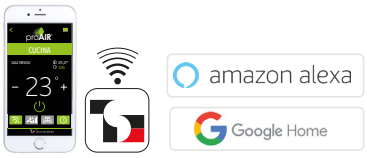


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

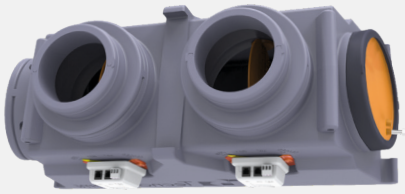



N.B. FOR KIT COMPONENTS
LIST SEE PAG. 39

Nr. 2
STEALTH 3X



THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)


Datasheet

CODE	DESCRIPTION	COUPLING Ø
GAD400373	PROAIR PACK CAB GREEN 2 - WITH SINTERED POLYSTYRENE PLENUM - WITH 2 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm


proAIR® CAB silverpack3 EOLO/EOLO MINI

3 ZONE WITH PLENUM IN POLYSTYRENE "EOLO-MINI" 125/150 mm

3 ZONE WITH PLENUM IN POLYSTYRENE "EOLO" 150/200 mm

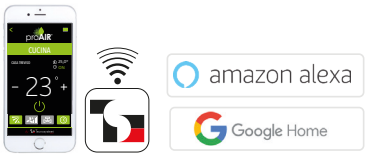


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

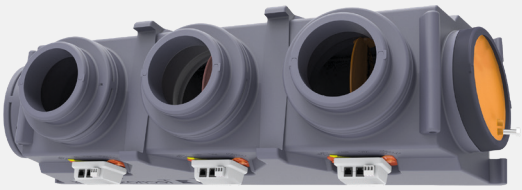



N.B. FOR KIT COMPONENTS
LIST SEE PAG. 39

Nr. 3
STEALTH 3X



THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet

CODE	DESCRIPTION	COUPLING Ø
GAD400374	PROAIR PACK CAB SILVER 3 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 3 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150mm
GAD400375	PROAIR PACK CAB SILVER 3 - WITH SINTERED POLYSTYRENE PLENUM - WITH 3 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200m m	150/200mm

proAIR® CAB greenpack2L


2 ZONE WITH INSULATED METAL SHEET PLENUM



amazon alexa

Google Home


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

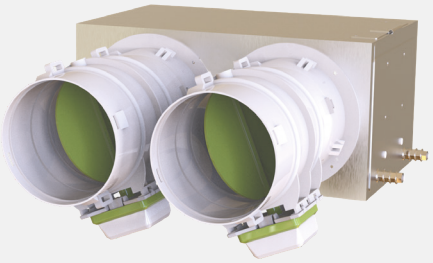



N.B. FOR KIT COMPONENTS
LIST SEE PAG. 39

Nr. 2
STEALTH 3X



THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet

CODE	DESCRIPTION	DAMPERS Ø
GAD400399	PROAIR PACK CAB GREEN 2 - WITH 2 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400400	PROAIR PACK CAB GREEN 2 L - WITH 2 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 4X CONTROL UNIT - Ø200 mm	200 mm

proAIR® CAB silverpack3L


3 ZONE WITH INSULATED METAL SHEET PLENUM



amazon alexa

Google Home


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

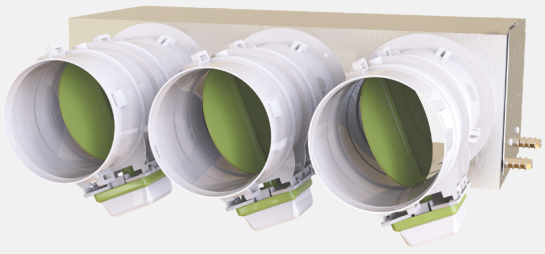



N.B. FOR KIT COMPONENTS
LIST SEE PAG. 39

Nr. 3
STEALTH 3X



THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet

CODE	DESCRIPTION	DAMPERS Ø
GAD400401	PROAIR PACK CAB SILVER 3 L - WITH 3 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400402	PROAIR PACK CAB SILVER 3 L - WITH 3 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm


proAIR® CAB lillapack4EOLO/EOLO MINI

4 ZONE WITH PLENUM IN POLYSTYRENE "EOLO-MINI"Ø125/150 mm

4 ZONE WITH PLENUM IN POLYSTYRENE "EOLO" Ø150/200 mm




With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

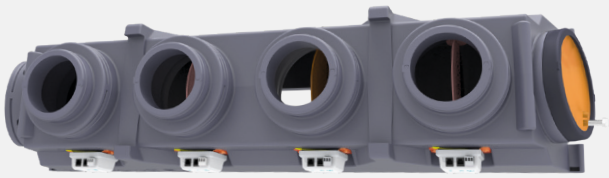



N.B. FOR KIT COMPONENTS LIST SEE PAG. 39

Nr. 4 STEALTH 3X



THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet


CODE	DESCRIPTION	COUPLING Ø
GAD400376	PROAIR PACK CAB LILLA 4 - WITH SINTERED POLYSTYRENE PLENUM MINI - WITH 4 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø125/150 mm	125/150mm
GAD400377	PROAIR PACK CAB LILLA 4 - WITH SINTERED POLYSTYRENE PLENUM - WITH 4 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

proAIR® CAB orangepack5EOLO

5 ZONE WITH PLENUM IN POLYSTYRENE "EOLO-MINI"Ø125/150 mm




With **POLARIS 5X** control unit with Colour display - Wi-Fi, Alexa, Google Home

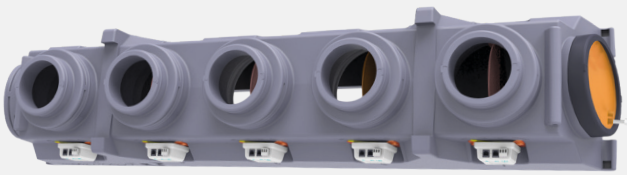



N.B. FOR KIT COMPONENTS LIST SEE PAG. 39

Nr. 5 STEALTH 3X




THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet


CODE	DESCRIPTION	COUPLING Ø
GAD400378	PROAIR PACK CAB ORANGE 5 - WITH SINTERED POLYSTYRENE PLENUM - WITH 5 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150/200 mm	150/200mm

proAIR® CAB lillapack4L

4 ZONE WITH INSULATED METAL SHEET PLENUM

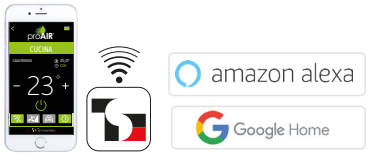


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

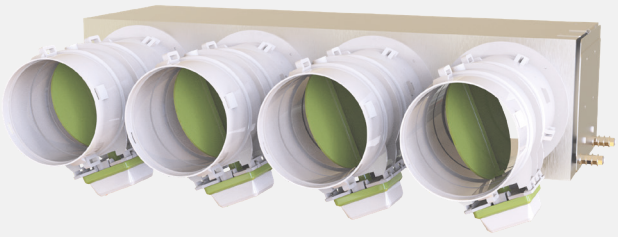



N.B. FOR KIT COMPONENTS LIST SEE PAG. 39

Nr. 4 STEALTH 3X




THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet


CODE	DESCRIPTION	DAMPERS Ø
GAD400403	PROAIR PACK CAB LILLA 4 L - WITH 4 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400404	PROAIR PACK CAB LILLA 4 L - WITH 4 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

proAIR® CAB orangepack5L

5 ZONE WITH INSULATED METAL SHEET PLENUM

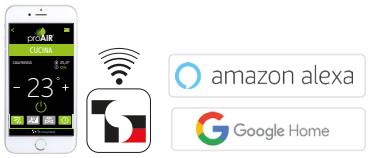

With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

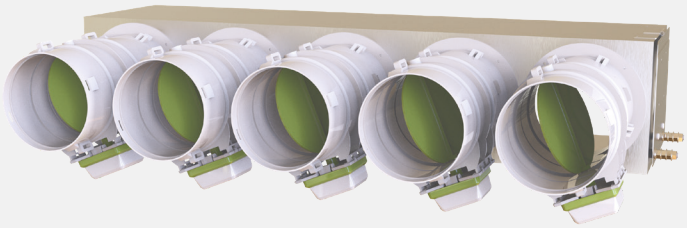



N.B. FOR KIT COMPONENTS LIST SEE PAG. 39

Nr. 5 STEALTH 3X




THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet


CODE	DESCRIPTION	DAMPERS Ø
GAD400405	PROAIR PACK CAB ORANGE 5 L - WITH 5 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400406	PROAIR PACK CAB ORANGE 5 L - WITH 5 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm

proAIR® CAB black pack6L

6 ZONE WITH INSULATED METAL SHEET PLENUM

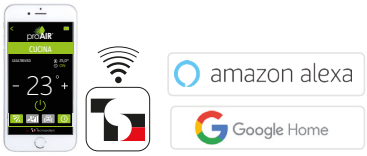


With **POLARIS 5X** control unit with
Colour display - Wi-Fi, Alexa, Google Home

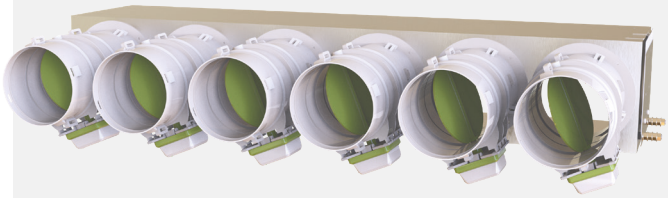



N.B. FOR KIT COMPONENTS LIST SEE PAG. 39

Nr. 6 STEALTH 3X



THE PLENUM FOR DUCT UNITS IS INCLUDED
(PLEASE, IN TIME OF ORDER SPECIFY CODE OF PLENUM, SEE FROM PAG.45)

Datasheet

CODE	DESCRIPTION	DAMPERS Ø
GAD400407	PROAIR PACK CAB BLACK 6 L - WITH 6 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø150 mm	150 mm
GAD400408	PROAIR PACK CAB BLACK 6 L - WITH 6 CHRONOTHERMOSTATS STEALTH 3X - WITH POLARIS 5X CONTROL UNIT - Ø200 mm	200 mm




Our PROAIR system elements can be downloaded for free on the BIMobject platform

bimobject®

Tecnosystemi makes available models of Proair system to professionists in the mechanical, architectural and structural design sector.
That models can be used on BIM (Building Information Modeling).

THE MOST COMPREHENSIVE RANGE OF PLENUMS FOR DUCTED UNITS AVAILABLE ON THE MARKET

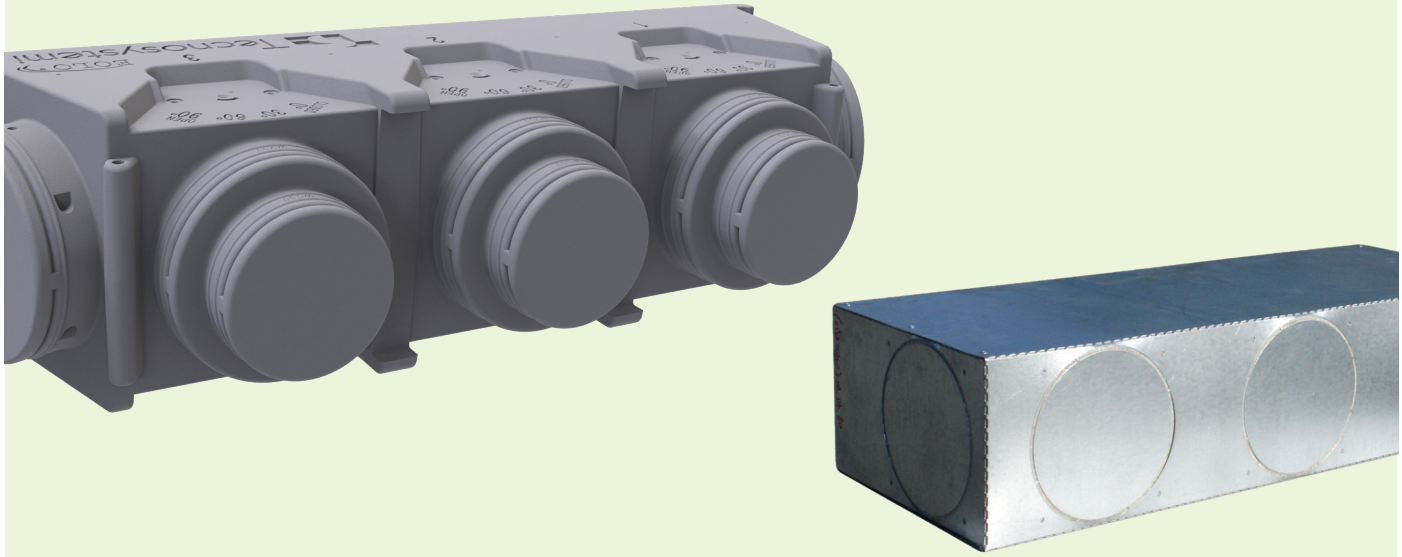

The cost of the ducted unit plenum is included in the price of the Proair pack

IDENTIFY THE BRAND AND MODEL OF YOUR DUCTED MACHINE


The catalogue contains all brands and models of ducted air conditioners currently in the manufacturers' catalogue



Material availability within **5** working days from the date of the order



In some cases, the delivery plenum may be offered in PAL.



PAL plenum **available upon request**, for quotations call the toll-free number **800 904474**

- *The information on the composition of each plenum is purely indicative and not binding. It is necessary to check that all elements that make up the plenum are compatible with the design specifications of the system to be built.*
- *Tecnosystemi S.p.A Società Benefit accepts no liability for negligent or improper use of the product.*
- *The products in this catalogue are designed and manufactured exclusively to our specifications.*
- *For further information, please contact the technical department.*

** SHEET METAL PLENUMS ARE PRE-DRILLED.*
** COLLARS ARE NOT INCLUDED IN THE SUPPLY: FOR COLLARS, SEE PAGES 137-139 PROJECT WIND.*

DAIKIN

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• FXSQ-A 40/50 • FXSA-A 40/50 • FBA-A 35/50	PWD400037	3 Ø 125-150	2 Ø 200
	PWD400403	4 Ø 125-150	2 Ø 200
• FXSQ-A 63/80 • FXSA-A 63/80 • FBA-A 60/71	PWD400038	4 Ø 125-150	2 Ø 200
• FXDQ-A 40/50 • FXDA-A 40/50	-	-	-
• FDQ-C 125 • FDA-A 125	-	-	-
• FXSQ-A 100/125 • FXSA-A 100/125 • FBA-A 100/125/140	-	-	-
• FXDQ-A 15/20/25/32 • FXDA-A 10/15/20/25/32 • FDXM-F 25/35	PWD400039	4 Ø 125-150	2 Ø 200
• FXDQ-A 63 • FXDA-A 63 • FDXM-F 50/60	-	-	-
• FXSQ-A 15/20/25/32 • FXSA-A 15/20/25/32	PWD400040	3 Ø 125-150	2 Ø 200
• FWS-AT 2 • FWM 01/15/02	-	-	-
• FWS-AT 3 • FWM 25/03	PWD400042	4 Ø 125-150	2 Ø 200
• FWS-AT 6 • FWM 35/04/06	-	-	-
• FWS-AT 8	-	-	-
• FWP-AT 02/03/04 • FWB-BT 02/03/04	-	-	-
• FWP-AT 05/06/07 • FWB-BT 05/06/07	-	-	-
• FWB-BT 08/09/10			
• FXSQ-A 140 • FXSA-A 140	-	-	-
• FWD-AT/AF 4	-	-	-
• FWD-AT/AF 6	-	-	-
• FWD-AT/AF 08/10	-	-	-
• FWD-AT/AF 12	-	-	-
• FNA-A 25/35 • FNQ-A 25/35	PWD400167	4 Ø 125-150	2 Ø 200
• FNA-A 50/60 • FNQ-A 50/60	-	-	-
• FDA-A 200/250	-	-	-
• FWE-DATN5V3 03/04/05	PWD400320	4 Ø 125-150	2 Ø 200
• FWE-DATN5V3 06 • FWE-DAFN5V3 06	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11165035	2 Ø 150-200	2 Ø 200	PWD400399	4 Ø 150	2 Ø 150	A1
PL11162007	3 Ø 150-200		PWD400400	5 Ø 150	2 Ø 150	A1
PWD400402	4 Ø 150-200		11162007	2 Ø 200	2 Ø 200	B2
			PWD400401	3 Ø 150	2 Ø 150	A1
PL11162008	4 Ø 150-200	2 Ø 200	PWD400395	4 Ø 150	2 Ø 150	A1
			11162008	3 Ø 200	2 Ø 200	B2
PWD400398	5 Ø 150-200	2 Ø 200	PWD400396	5 Ø 150	2 Ø 150	A1
			PWD400397	6 Ø 150	2 Ø 150	A1
PL11162004	4 Ø 150-200	2 Ø 200	11162004	4 Ø150	4 Ø150	B2
PL11162001	5 Ø 150-200	2 Ø 200	11162001	5 Ø 200	2 Ø 200	B2
PL11162009	5 Ø 150-200	2 Ø 200	11162009	5 Ø 200	2 Ø 200	B2
PL11162002	3 Ø 150-200	2 Ø 200	11162002	3 Ø 150	2 Ø 150	A1
PL11162006	5 Ø 150-200	2 Ø 200	11162006	5 Ø 150	2 Ø 150	A1
PL11165037	2 Ø 150-200	2 Ø 200	11165041	2 Ø 150	2 Ø 150	A1
PL11165041	3 Ø 150-200					
PL11165036	2 Ø 150-200	2 Ø 200	11165042	2 Ø 150	2 Ø 150	A1
PL11165042	3 Ø 150-200					
PL11165043	3 Ø 150-200	2 Ø 200	11165043	3 Ø 150	2 Ø 150	A1
PL11165045	4 Ø 150-200	2 Ø 200	11165045	4 Ø 150	2 Ø 150	A1
PL11165047	5 Ø 150-200	2 Ø 200	-	-	-	-
PL11165044	3 Ø 150-200	2 Ø 200	11165044	3 Ø 150	2 Ø 150	A1
PL11165046	5 Ø 150-200	2 Ø 200	11165046	5 Ø 150	2 Ø 150	A1
-	-	-	11165049	7 Ø 150	2 Ø 150	A1
-	-	-	11165048	7 Ø 150	2 Ø 150	A1
-	-	-	11165040	3 Ø 150	2 Ø 150	A1
-	-	-	11165039	4 Ø 150	2 Ø 150	A1
PL11165038	5 Ø 150-200	2 Ø 200	11165038	5 Ø 150	2 Ø 150	A1
PL11162010	5 Ø 150-200	2 Ø 200	11162010	4 Ø 200	2 Ø 200	B2
PWD400173	3 Ø 150-200	2 Ø 200	PWD400185	3 Ø 150	2 Ø 150	A1
PWD400174	5 Ø 150-200	2 Ø 200	PWD400186	5 Ø150	2 Ø 150	A1
-	-	-	PWD400316	5 Ø 200	2 Ø 200	B2
PWD400317	3 Ø 150-200	2 Ø 200	PWD400313	3 Ø 150	2 Ø 150	A1
PWD400318	4 Ø 150-200	2 Ø 200	PWD400314	4 Ø 150	2 Ø 150	A1

DAIKIN	SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE		
	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• FWE-DATN5V3 07/08/10 • FWE-DAFN5V3 07/08/10	-	-	-
• FWB-CTN/CFN 04/05 • FWP-CTN/CFN 04/05	-	-	-
• FWB-CTN/CFN 06/08 • FWP-CTN/CFN 06/08	-	-	-
• FWB-CTN/CFN 10/11/15/17 • FWP-CTN/CFN 10/11/15/17	-	-	-

DAIKIN PLENUM IN **PAL** DISPONIBILE A RICHIESTA
contattare l'Ufficio Preventivi: preventivi@tecnosystemi.com

Panasonic	SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE		
	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• S-PF1E5A/B 36/45/50 • S-MF2E5A 15/22/28/36/45/56 • S-PF3E 3650	-	-	-
• S-PF1E5A/B 60/71 • S-MF2E5A 60/73/90	PWD400044	4 Ø 125-150	2 Ø 200
• S-PF1E5A/B 100/125/140 • S-MF2E5A 106/140/160	-	-	-
• CS-MZ UD3EA 20 • CS-Z UD3EAW 25/35/50/60	PWD400045	4 Ø 125-150	2 Ø 200
• S-PN1E5A/B 36/45/50	-	-	-
• S-PN1E5A/B 100/125/140	-	-	-
• S-PE2E5 250	-	-	-
• S-PF3E 6071	-	-	-
• S-PF3E 1014	-	-	-
• S-MM1E5A 15/22/28/36/45/56 • CS-Z 20/25/35/50/60	PWD400366	4 Ø 125-150	2 Ø 200
• S-PE3E5B 200/250	-	-	-
• S-MF3E5B 15/22/28/36/45/56	-	-	-
• S-MF3E5B 60/73/90	-	-	-
• S-MF3E5B 106/140/160	-	-	-
• FC2A-D - L/R 30	-	-	-
• FC2A-D - L/R 40	-	-	-
• FC2A-D - L/R 050/070	-	-	-
• FC2A-D - L/R 060/80	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400319	5 Ø 150-200	2 Ø 200	PWD400315	5 Ø 150	2 Ø 150	A1
PWD400376	3 Ø 150-200	2 Ø 200	PWD400372	2 Ø 200	2 Ø 200	B2
PWD400377	4 Ø 150-200	2 Ø 200	PWD400373	3 Ø 200	2 Ø 200	B2
PL11162010	5 Ø 150-200	2 Ø 200	11162010	4 Ø 200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11164003	3 Ø 150-200	2 Ø 200	11164003	3 Ø 150	2 Ø 150	A1
PL11164002	4 Ø 150-200	2 Ø 200	11164002	4 Ø 150	2 Ø 150	A1
PL11164004	5 Ø 150-200	2 Ø 200	11164004	6 Ø 150	2 Ø 150	A1
PL11164006	3 Ø 150-200	2 Ø 200	11164006	3 Ø 150	2 Ø 150	A1
-			11164008	3 Ø 150	2 Ø 150	A1
-			11164010	5 Ø 150	2 Ø 150	A1
-	-	-	PWD400088	4 Ø 200	2 Ø 200	B2
PWD400281	3 Ø 150-200	2 Ø 200	PWD400256	4 Ø150	2 Ø 150	A1
PWD400282	5 Ø 150-200	2 Ø 200	PWD400257	5 Ø 150	2 Ø 150	A1
PWD400365	3 Ø 150-200	2 Ø 200	PWD400370	3 Ø150	2 Ø 150	A1
-	-	-	PWD400371	4 Ø200	2 Ø 200	B2
PL11164003	3 Ø 150-200	2 Ø 200	11164003	3 Ø150	2 Ø150	A1
PWD400281	3 Ø 150-200	2 Ø 200	PWD400256	4 Ø150	2 Ø 150	A1
PWD400282	5 Ø 150-200	2 Ø 200	PWD400257	5 Ø 150	2 Ø 150	A1
-	-	-	PWD400442	3 Ø150	2 Ø150	A1
-	-	-	PWD400443	4 Ø150	2 Ø150	A1
-	-	-	PWD400444	5 Ø150	2 Ø150	A1
-	-	-	PWD400445	6 Ø150	2 Ø150	A1

TOSHIBA

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• RAV-SM BTP-E 406/456/566 • MMD-AP BHP-E 0076/0096/0126/0156/0186 • RAV-RM BTP-E 561 • MMD-AP BHP1-E 0076/96/126/156/186	PWD400048	4 Ø 125-150	2 Ø 200
• RAS-M G3DV-E/ND/TR 07/10/13 • RAS-MU2DVG-E 07/10/13	PWD400049	4 Ø 125-150	2 Ø 200
• RAV-SM BTP-E 806 • MMD-AP BHP-E 0246/0276/0306 • RAV-RM BTP-E 801 • MMD-AP BHP1-E 0246/276/306 • MMD-AP HP1-E 0186/246/276	-	-	-
• RAV-SM BTP-E 1106/1406/1606 • MMD-AP BHP-E 0366/0486/0566 • MMD-UP HP-E 0361/0481/0561 • MMD-UP HFP-E 481 • RAV-RM BTP-E 1101/1401/1606 • RAV-HM BTP-E 1101/1401/1601 • MMD-AP BHP1-E 0366/486/566 • MMD-AP HP1-E 0366/486/566 • MMD-UP BHP-E 0361/0481/0561	-	-	-
• RAS-M G3DV 16 • M G3DV - E/ND/TR 16 • RAS-M U2DVG-E 16	-	-	-
• RAV-SM SDT-E 304/404/454/564 • MMD-P SPHE 0056/76/96/126/154/184 • RAV-RM SDT-E 301/401/561 • MMD-AP SPH1-E 0056/74/94/124/154/184	-	-	-
• RAS-M U2DVG-E 22/24	-	-	-
• MMD-AP SPH1-E 0244/274	-	-	-
• MMD-AP HP-E 0726/0966 • MMD-UP HP-E 0721/0961 • MMD-UP HFP-E 0721/0961/1121/1281 • RAV-SM DTP-E 2244/2804 • RAV-RM DTP-E 2241/2801	-	-	-
• MMD-UP-SPHY-E 0031/051/071/091/121	PWD400049	4 Ø 125-150	2 Ø 200
• MMD-UP-SPHY-E 0151/0181	-	-	-
• MMD-UP-SPHY-E 0241/0271	-	-	-
• RAV-HM BTP-E 561 • MMD-UP BHP-E 0051/0071/0091/0121/0151/0171	PWD400446	4 Ø125-150	2 Ø 200
• RAV-HM BTP-E 801 • MMD-UP BHP-E 0241/0271/0301 • MMD-UP HP-E 0181/0241/0271	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162093	3 Ø 150-200	2 Ø 200	11162093	3 Ø 150	2 Ø 150	A1
PL11162096	3 Ø 150-200	2 Ø 200	11162096	3 Ø 150	2 Ø 150	A1
PL11162094	4 Ø 150-200	2 Ø 200	11162094	5 Ø 150	2 Ø 150	A1
-	-	-	11162095	6 Ø 150	2 Ø 150	A1
PL11162097	4 Ø 150-200	2 Ø 200	11162097	4 Ø 150	2 Ø 150	A1
PL11162098	4 Ø 150-200	2 Ø 200	11162098	4 Ø 150	2 Ø 150	A1
PWD400132	4 Ø 150-200	2 Ø 200	PWD400148	5 Ø 150	2 Ø 150	A1
PWD400133	5 Ø 150-200	2 Ø 200	PWD400149	5 Ø 150	2 Ø 150	A1
-	-	-	PWD400150	5 Ø 200	2 Ø 200	B2
PL11162096	3 Ø 150-200	2 Ø 200	11162096	3 Ø 150	2 Ø 150	A1
PL11162097	4 Ø 150-200	2 Ø 200	11162097	4 Ø 150	2 Ø 150	A1
PWD400132	4 Ø 150-200	2 Ø 200	PWD400148	5 Ø 150	2 Ø 150	A1
PWD400447	3 Ø 150-200	2 Ø 200	PWD400424	2 Ø 200	2 Ø 200	B2
PWD400448	4 Ø150-200	2 Ø 200	PWD400425	4 Ø 200	2 Ø 200	B2

MITSUBISHI ELECTRIC

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• PEFY-P VMA-E 20/25/32 • PEFY-W 20/25/32 VMA-A • PEFY-M VMA-A 20/25/32 • PEFY-WP VMA-E 20	-	-	-
• PEFY-P VMS 1-E 15/20/25/32	PWD400039	4 Ø 125-150	2 Ø 200
• SEZ-M DAL 35/50 • SEZ-M 35/50 DA • PEFY-W 40/50 VMS-A • PEFY-P VMS1-E 40/50 • PEFY-WP VMS1-E 32/40	-	-	-
• SEZ-M DAL 60/71 • PEFY-P VMS 1-E 63	-	-	-
• PEAD M JA 35/50 • PEFY-W 40 VMA-A • PEFY-P VMA-E 40/50 • PEFY-M VMA-A 40/50/63 • PEFY-WP VMA-E 25/32	-	-	-
• PEFY-P VMA-E 63/71/80 • PEAD-SM JAL 71 • PEFY-W 50/63/71/80 VMA-A • PEFY-M VMA-A 71/80 • PEFY-WP VMA-E 40/50	-	-	-
• PEFY-P VMA-E 100/125 • PEAD-SM JAL 100/125 • PEFY-W 100/125 VMA-A • PEAD-M JA 100/125 • PEFY-M VMA-A 100/125	-	-	-
• PEFY-P VMA-E 140 • PEAD-SM JAL 140 • PEFY-M VMA-A 140	-	-	-
• PEFY-P VMR-E-L 20/25/32	-	-	-
• PEFY-P VMHS-E 40/50/63	-	-	-
• PEFY-P VMHS-E 71/80	-	-	-
• PEFY-P VMHS-E 100/125/140	-	-	-
• PEFY-P VMHS-E 200/250	-	-	-
• SEZ-M 25 DA • PEFY-W 10/15/20/25/32 VMS-A • PEFY-WP VMS1-E 10/15/20/25	PWD400298	4 Ø 125-150	2 Ø 200
• SEZ-M 60/71 DA • PEFY-WP VMS1-E 50	-	-	-

MITSUBISHI ELECTRIC

PLENUM IN **PAL** DISPONIBILE A RICHIESTA
contattare l'Ufficio Preventivi: preventivi@tecnosystemi.com

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162018	3 Ø 150-200	2 Ø 200	11162018	3 Ø150	2 Ø150	A1
PL11162002	3 Ø 150-200	2 Ø 200	11162002	3 Ø150	2 Ø150	A1
PL11162015	4 Ø 150-200	2 Ø 200	11162015	4 Ø150	2 Ø150	A1
PL11162006	5 Ø 150-200	2 Ø 200	11162006	5 Ø150	2 Ø150	A1
PL11162013	4 Ø 150-200	2 Ø 200	11162013	4 Ø150	2 Ø150	A1
PL11162014	5 Ø 150-200	2 Ø 200	11162014	5 Ø150	2 Ø150	A1
-	-	-	11162016	7 Ø150	2 Ø150	A1
-	-	-	11162017	8 Ø150	2 Ø150	A1
-	-	-	PWD400242	2 Ø 150	2 Ø 150	A1
-	-	-	PWD400261	2 Ø 200	2 Ø 200	B2
-	-	-	PWD400262	3 Ø 200	2 Ø 200	B2
-	-	-	PWD400263	4 Ø 200	2 Ø 200	B2
-	-	-	PWD400266	4 Ø 200	2 Ø 200	B2
PWD400275	3 Ø 150-200	2 Ø 200	PWD400250	3 Ø150	2 Ø150	A1
PWD400276	4 Ø 150-200	2 Ø 200	PWD400251	5 Ø150	2 Ø150	A1

SAMSUNG

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• AC MNLDKH/EU 026/035 • AM FNLDEH/EU 017/022/028/036 • AE MNLDEH/EU 022/028/036 • AC RNLDKG/EU 026/035	PWD400039	4 Ø 125-150	2 Ø 200
• AE MNLDEH/EU 056 • AM FNMDEH/EU 022/028/036 • AM FNLDEH/EU 045/056 • AJ RBLDEG/EU 026/036	-	-	-
• AJ TNLDEG/EU 026/035	PWD400241	3 Ø 125-150	2 Ø 200
• AM NMDEH/EU 045/056/071 • AJ TNMDEG/EU 052	-	-	-
• AC MNMDKH/EU 035/052/060/071 • AC BNMPKG/EU 035/052 • AE MNMPEH/EU 071 • AE BNMPEH 036/056 • AE ANMPEH 071 • AM HNMPKH 036/045/056/071 • AC JNMCEH/EU 035 • AC RNMDKG/EU 035/052/071 • AC HNMCEH/EU 035 • AM - ANMPKH/EU 022/028/036/045/056/071	-	-	-
• AC MNLDKH/EU 052/071 • AC RNLDKG/EU 052/071	-	-	-
• AC MNMDKH/EU 090/100 • AC BNMPKG/EU 071 • AM HNMPKH/EU 090 • AM - ANMPKH/EU 090 • AC JNMCEH/EU 071 • AC RNMDKG/EU 100 • AE MNMPEH/EU 090	-	-	-
• AC MNMDKH/EU 120/140 • AC BNMPKG/EU 100/120/140 • AC JNMCEH/EU 100/125 • AC RNMDKG/EU 120/140 • AM - ANMPKH/EU 112/128/140 • AM HNHPKH/EU 112/128/140 • AM HNMPKH/EU 112/128/140	-	-	-
• AM FNLDEH/EU 071	-	-	-
• AC SDXEA 090/100	-	-	-
• AM FNMDEH/EU 090 • DH EAV2 070/090	-	-	-
• AC JNHPKH/EU 180/200 • AC KNHPKH/EU 200/250	-	-	-
• AM FNHDEH 220/280 • AM JNHFKH/EU 180/224	-	-	-
• AM - ANLDKH/EU 017/022/028/036	PWD400241	3 Ø 125-150	2 Ø 200

	SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
		N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
	PL11162002	3 Ø 150-200	2 Ø 200	11162002	3 Ø150	2 Ø150	A1
	PL11162004	4 Ø 150-200	2 Ø 200	11162004	4 Ø150	2 Ø150	A1
	PWD400240	2 Ø 150-200	2 Ø 200	PWD400239	2 Ø150	2 Ø150	A1
	PL11165002	4 Ø 150-200	2 Ø 200	11165002	4 Ø150	2 Ø150	A1
	PL11165008	4 Ø 150-200	2 Ø 200	11165008	3 Ø200	2 Ø200	B2
				PWD400197	4 Ø200	2 Ø200	B2
	PL11165010	5 Ø 150-200	2 Ø 200	11165010	5 Ø150	2 Ø150	A1
	PL11165012	5 Ø 150-200	2 Ø 200	11165012	5 Ø200	2 Ø200	B2
	-	-	-	11165014	5 Ø200	2 Ø200	B2
	-	-	-	11165004	5 Ø150	2 Ø150	A1
	-	-	-	11165006	4 Ø200	2 Ø200	B2
	PL11165009	4 Ø 150-200	2 Ø 200	-	-	-	-
	-	-	-	PWD400145	5 Ø 200	2 Ø 200	B2
	-	-	-	PWD400146	4 Ø 200	2 Ø 200	B2
	PWD400240	2 Ø 150-200	2 Ø 200	PWD400239	2 Ø150	2 Ø150	A1

MITSUBISHI HEAVY INDUSTRIES LTD.

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• SRR ZM-S 25/35	PWD400051	4 Ø 125-150	2 Ø 200
• SRR ZM-S 50/60	-	-	-
• FDUM VF/VH 40/50 • FDU KX6F 45/56 • FDUM KXE6F 22/56	PWD400052	4 Ø 125-150	2 Ø 200
• FDUM VF/VH 60/71 • FDU VF1 71 • FDU KX6F 71/90 • FDUM KXE6F 71/90	-	-	-
• FDUM VF/VH 100/125/140 • FDU VF1/VF2 100 • FDU KXE6F 112/140 • FDU VF 100/125/140 • FDUM KXE6F 112/140/160	-	-	-
• FDU VG 200/240	-	-	-

SHARP air conditioning

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• GB-X SR 18	PWD400065	4 Ø 125-150	2 Ø 200
• GB-X SR 24/36	-	-	-

HITACHI

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• RAD RPA 25/35/50	PWD400060	4 Ø 125-150	2 Ø 200
• RAD PPA 50/60/70	-	-	-
• RPI FSN4E 2.0/2.5/3.0	-	-	-
• RPI FSN4E 4.0/5.0/6.0	-	-	-
• RAD-RPE 25/35 • RAD-QPE 18	-	-	-
• RAD-RPE 50/60 • RAD-PPD 50/60/70	-	-	-
• RPIM-UNE1NH 3.0	-	-	-
• RPIM-UNE1NH 4.0/5.0/6.0/6.5	-	-	-
• RPI-FSRE 0.4	PWD400457	3 Ø 125-150	2 Ø 200
• RPI-FSRE 1.5/2.0	PWD400459	3 Ø 125-150	2 Ø 200
• RPI-FSRE 2.5/3.0	-	-	-
• RPI-FSRE 4.0/6.0 • RPI-FSN6E-EF 4.0/6.0	-	-	-
• RPIH-FSRE 4.0/6.0	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162164	3 Ø 150-200	2 Ø 200	11162164	3 Ø 150	2 Ø 150	A1
PL11162165	4 Ø 150-200	2 Ø 200	11162165	4 Ø 150	2 Ø 150	A1
PL11162161	3 Ø 150-200	2 Ø 200	11162161	3 Ø 150	2 Ø 150	A1
PL11162162	4 Ø 150-200	2 Ø 200	11162162	4 Ø 150	2 Ø 150	A1
PL11162163	5 Ø 150-200	2 Ø 200	11162163	6 Ø 150	2 Ø 150	A1
-	-	-	11162166	6 Ø 200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11163200	4 Ø 150-200	2 Ø 200	11163200	4 Ø 150	2 Ø 150	A1
PL11163201	4 Ø 150-200	2 Ø 200	11163201	4 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11163020	3 Ø 150-200	2 Ø 200	11163020	3 Ø 150	2 Ø 150	A1
-	-	-	11163021	3 Ø 200	2 Ø 200	B2
-	-	-	11163022	4 Ø 150	2 Ø 150	A1
-	-	-	11163023	6 Ø 150	2 Ø 150	A1
-	-	-	PWD400303	3 Ø 200	2 Ø 200	B2
PWD400285	4 Ø 150-200	2 Ø 200	PWD400260	3 Ø 200	2 Ø 200	B2
PWD400020	4 Ø 150-200	2 Ø 200	PWD400001	3 Ø 200	2 Ø 200	B2
PWD400021	5 Ø 150-200	2 Ø 200	PWD400003	5 Ø 200	2 Ø 200	B2
PWD400458	2 Ø150-200	2 Ø 200	PWD400435	2 Ø150	2 Ø 150	A1
PWD400460	2 Ø150-200	2 Ø 200	PWD400436	3 Ø150	2 Ø 150	A1
PWD400461	4 Ø150-200	2 Ø 200	PWD400437	4 Ø150	2 Ø 150	A1
PWD400462	5 Ø150-200	2 Ø 200	PWD400438	6 Ø150	2 Ø 150	A1
-	-	-	PWD400439	5 Ø200	2 Ø 200	B2

Haier

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• AD MS1ERA 12	-	-	-
• AD MS1ERA 18 • AD MS1ERA - MS2ERA 24/28	-	-	-
• AD SS1ERA 09/12 • AD S2SS1FA 25/35	PWD400054	4 Ø 125-150	2 Ø 200
• AD SS1ERA 18/24	-	-	-
• AD HS1ERA 48/60	-	-	-
• ADH M1ERG 105/125/140	-	-	-
• AD S2S S1FA 50 • AD S2S S2FA 50 • AD S2S S1FA 71 • AD S2S S2FA 71	-	-	-
• AD S2S M3FA 35	PWD400055	3 Ø 125-150	2 Ø 200
• AD S2S S2FA 25 • AD S2S S1FA 35	PWD400089	4 Ø 125 150	2 Ø 200
• AD S2S M1FA 50 • AD S2S M1FA 71	-	-	-
• AD S2S M3FA 50 • AD S2S M3FA 71 • AD S2S M3FA 90 • AD MJERA 302	-	-	-
• AD S2S M3FA 105 • AD S2S M3FA 125 • AD S2S M3FA 140	-	-	-
• ADH H1ERG 105 • ADH H1ERG 125 • ADH H1ERG 140	-	-	-

CLIVET

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• MP INH CC2 15/21/25	-	-	-
• MP INH CC2 31/41/51	-	-	-
• ID2-XY 27M/35M	PWD400297	3 Ø 125-150	2 Ø 200
• ID2-XY 53M	PWD400064	4 Ø 125-150	2 Ø 200
• ID2-XY 105M	-	-	-
• ID2-XY 140M/160M	-	-	-
• ID3-XY -M 27/35	PWD400063	3 Ø 125-150	2 Ø 200
• ID3-XY -M 53	PWD400064	4 Ø 125-150	2 Ø 200
• ID3-XY -M 70	-	-	-
• ID3-XY -M 88/105	-	-	-
• ID3-XY -M 120/140/160	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
-	-	-	11162053	2 Ø 150	2 Ø 150	A1
PL11162054	4 Ø 150-200	2 Ø 200	11162054	4 Ø 150	2 Ø 150	A1
PL11162055	3 Ø 150-200	2 Ø 200	11162055	3 Ø 150	2 Ø 150	A1
-	-	-	11162057	5 Ø 150	2 Ø 150	A1
-	-	-	11162056	3 Ø 200	2 Ø 200	B2
-	-	-	11162059	6 Ø 150	2 Ø 150	A1
PL11165112	4 Ø 150-200	2 Ø 200	11165112	5 Ø150	2 Ø150	A1
PWD400029	3 Ø 150-200	2 Ø 200	PWD400017	3 Ø 150	2 Ø 150	A1
PWD400090	3 Ø 150-200	2 Ø 200	PWD400082	3 Ø 150	2 Ø 150	E5
PWD400092	3 Ø 150-200	2 Ø 200	PWD400084	4 Ø 150	2 Ø 150	E5
PWD400093	4 Ø 150-200	2 Ø 200	PWD400085	5 Ø 150	2 Ø 150	E5
-	-	-	PWD400086	6 Ø 150	2 Ø 150	E5
-	-	-	PWD400087	6 Ø 150	2 Ø 150	E5

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162003	4 Ø 150-200	2 Ø 200	11162003	3 Ø 200	2 Ø 200	B2
PL11162001	5 Ø 150-200	2 Ø 200	11162001	5 Ø 200	2 Ø 200	B2
PWD400274	2 Ø 150-200	2 Ø 200	PWD400249	3 Ø 150	2 Ø 150	A1
PWD400023	3 Ø150-200	2 Ø 200	PWD400007	3 Ø150	2 Ø150	A1
PWD400025	5 Ø150-200	2 Ø 200	PWD400011	6 Ø150	2 Ø150	A1
PWD400026	4 Ø 150-200	2 Ø 200	PWD400012	4 Ø 200	2 Ø 200	B2
PWD400027	3 Ø150-200	2 Ø 200	PWD400005	2 Ø150	2 Ø 150	A1
PWD400023	3 Ø150-200	2 Ø 200	PWD400007	3 Ø150	2 Ø 150	A1
PWD400024	4 Ø150-200	2 Ø 200	PWD400009	4 Ø150	2 Ø 150	A1
PWD400025	5 Ø150-200	2 Ø 200	PWD400011	6 Ø150	2 Ø 150	A1
PWD400456	4 Ø150-200	2 Ø 200	PWD400431	4 Ø200	2 Ø 200	B2

Fuji Electric

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• RDG LLTB 09/12/14	PWD400056	4 Ø 125-150	2 Ø 200
• RDG LLTB 18	-	-	-
• RDG LHTLB 12/14	-	-	-
• RDG LHTLB 18/24/30	-	-	-
• RDG LHTLB 36/45/54	-	-	-
• RDG LM 24/30/36/45 **(con flangia di mandata da 1065x208)	-	-	-
• RDG LHTA 45/54	-	-	-
• RDG LSLAP 12/14	-	-	-
• RDG LSLAP 18	-	-	-
• RDG KLLAP 9/12/14	PWD400057	4 Ø 125-150	2 Ø 200
• RDG KLLAP 18	-	-	-

FUJITSU

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ARYG LSLAP 12/14 • ARXG KLLAP 9/12/14	PWD400057	4 Ø 125-150	2 Ø 200
• ARYG LLTB 12/14	PWD400056	4 Ø 125-150	2 Ø 200
• ARYG LLTB 18	-	-	-
• ARYG LMLA 24/36 **(con flangia di mandata da 1065x208) • ARYG LMLA/LE 30/36 **(con flangia di mandata da 1065x208) • ARYG LMLA 45 **(con flangia di mandata da 1065x208) • ARXG KMLA 22/24/30/36/45 **(con flangia di mandata da 1065x208)	-	-	-
• ARYG LHTA-LHTAT 45/54 • ARXG KHTA 45/54	-	-	-
• ARYG LHTBP 12/14 • ARXG KHTAP 12/14	-	-	-
• ARYG LHTBP 18/22/24/30 • ARYG KHTAP 18/22/24/30	-	-	-
• ARYG LSLAP 18 • ARXG KLLAP 18	-	-	-
• ARYG-LHTBP 36/45/54	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162027	3 Ø 150-200	2 Ø 200	11162027	3 Ø 150	2 Ø 150	A1
PL11162030	4 Ø 150-200	2 Ø 200	11162030	4 Ø 150	2 Ø 150	A1
PL11162000	4 Ø 150-200	2 Ø 200	11162000	2 Ø 150	2 Ø 150	B2
PWD400284	4 Ø 150-200	2 Ø 200	PWD400259	3 Ø 200	2 Ø 200	B2
PL11162001	5 Ø 150-200	2 Ø 200	11162001	5 Ø 200	2 Ø 200	B2
PL11162028	5 Ø 150-200	2 Ø 200	11162028	4 Ø 200	2 Ø 200	B2
-	-	-	11162025	3 Ø 200	2 Ø 200	B2
-	-	-	PWD400161	3 Ø 150	2 Ø 150	A1
-	-	-	PWD400162	4 Ø150	2 Ø 150	A1
PL11162026	3 Ø 150-200	3 Ø 200	11162026	3 Ø 150	2 Ø 150	A1
PWD400131	4 Ø 150-200	2 Ø 200	PWD400147	4 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162026	3 Ø 150-200	3 Ø 200	11162026	3 Ø 150	2 Ø 150	A1
PL11162027	3 Ø 150-200	2 Ø 200	11162027	3 Ø 150	2 Ø 150	A1
PL11162030	4 Ø 150-200	2 Ø 200	11162030	4 Ø 150	2 Ø 150	A1
PL11162028	5 Ø 150-200	2 Ø 200	11162028	4 Ø 200	2 Ø 200	B2
-	-	-	11162025	3 Ø 200	2 Ø 200	B2
PL11162000	4 Ø 150-200	2 Ø 200	11162000	2 Ø 200	2 Ø 200	B2
PL11162003	4 Ø 150-200	2 Ø 200	11162003	3 Ø 200	2 Ø 200	B2
PWD400131	4 Ø 150-200	2 Ø 200	PWD400147	4 Ø 150	2 Ø 150	A1
PL11162001	5 Ø 150-200	2 Ø 200	11162001	5 Ø 200	2 Ø 200	B2

GREE

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• GFH EA-K3DNA1A/1 09/12	PWD400039	4 Ø 125-150	2 Ø 200
• GFH EA-K3DNA1A/1 18	-	-	-
• GFH EA-K3DNA1A/1 21/24	-	-	-
• GFH K3FI 12/18	PWD400065	4 Ø 125-150	2 Ø 200
• GFH K3FI 24/30/36	-	-	-
• GUD PS/A-T 35	PWD400099	3 Ø 125 - 150	2 Ø 200
• GUD PS/A-T 50	-	-	-
• GUD PS/A-T 71 • GUD PS/A-T 85	-	-	-
• GUD PHS/A-T 71 • GUD PHS/A-T 85	-	-	-
• GUD PHS/A-T 100	-	-	-
• GUD PHS/A-T 140 • GUD PHS/A-T 160	-	-	-
• GUD PS1/A-S 35	PWD400292	3 Ø 125 - 150	2 Ø 200
• GUD PS1/A-S 50	-	-	-
• GUD PS1/A-S 71	-	-	-
• GUD PS1/A-S 100	-	-	-
• GUD PS1/A-S 125/140	-	-	-

LG

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• CM N 14 18/24 • UM N14 30 • ARNU GM1A4 07/09/12/15/18/24 • CM R.N10 18/24 • UM R.N10 30 • CM F.N10 18/24 • UM F.N10 30 • UM FH.N10 12/18	-	-	-
• CB L N12 9	PWD400058	4 Ø 125-150	2 Ø 200
• CB L N22 12/18	-	-	-
• UM N24 36/42 • UM R N20 36/42 • ARNU GM2A4 28/36/42 • UM F.N20 36/42	-	-	-
• UB E NHO 18/24C/24	-	-	-
• ARNU-GL1G4 05/07/09	-	-	-
• ARNU-GL2G4 12/15/18 • UL-FH.F50 12/18 • CL-F.N50 09/12	-	-	-
• ARNU-GL3G4 21/24 • CL-F.N60 18	-	-	-
• ARNU-GB8A4 76/96	-	-	-
• UM-FH.N20 24/30	-	-	-
• UM-FH.N30 36/42/48 • UM-F.N30 48/60	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162002	3 Ø 150-200	2 Ø 200	11162002	3 Ø 150	2 Ø 150	A1
PL11162004	4 Ø 150-200	2 Ø 200	11162004	4 Ø 150	2 Ø 150	A1
PL11162006	5 Ø 150-200	2 Ø 200	11162006	5 Ø 150	2 Ø 150	A1
PL11163200	4 Ø 150-200	2 Ø 200	11163200	4 Ø 150	2 Ø 150	A1
PL11163201	4 Ø 150-200	2 Ø 200	11163201	4 Ø 150	2 Ø 150	A1
PWD400100	3 Ø 150 200	2 Ø 200	PWD400094	3 Ø 150	2 Ø 150	E5
PWD400101	4 Ø 150 200	2 Ø 200	PWD400095	4 Ø 150	2 Ø 150	E5
PWD400102	5 Ø 150 200	2 Ø 200	PWD400096	6 Ø 150	2 Ø 150	E5
-	-	-	PWD400352	3 Ø 200	2 Ø 200	B2
PWD400103	3 Ø 150 200	2 Ø 200	PWD400097	3 Ø 200	2 Ø 200	B2
PWD400104	5 Ø 150 200	2 Ø 200	PWD400098	5 Ø 200	2 Ø 200	B2
PWD400268	3 Ø 150-200	2 Ø 200	PWD400243	3 Ø 150	2 Ø 150	A1
PWD400101	4 Ø 150-200	2 Ø 200	PWD400095	4 Ø 150	2 Ø 150	A1
PWD400415	4 Ø 150-200	2 Ø 200	PWD400413	3 Ø 200	2 Ø 200	B2
PWD400416	5 Ø 150-200	2 Ø 200	PWD400414	5 Ø 200	2 Ø 200	B2
PWD400466	5 Ø 150-200	2 Ø 200	PWD400465	5 Ø 200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162067	4 Ø 150-200	2 Ø 200	11162067	3 Ø 200	2 Ø 200	B2
-	-	-	11162072	3 Ø 150	2 Ø 150	A1
-	-	-	11162068	4 Ø 150	2 Ø 150	A1
PL11162070	5 Ø 150-200	2 Ø 200	11162070	5 Ø 200	2 Ø 200	B2
-	-	-	11162073	4 Ø 150	2 Ø 150	A1
PWD400271	3 Ø 150-200	2 Ø 200	PWD400246	3 Ø150	2 Ø 150	A1
PWD400272	4 Ø 150-200	2 Ø 200	PWD400247	4 Ø150	2 Ø 150	A1
PWD400273	4 Ø 150-200	2 Ø 200	PWD400248	5 Ø150	2 Ø 150	A1
-	-	-	PWD400265	4 Ø200	2 Ø 200	B2
PWD400283	5 Ø 150-200	2 Ø 200	PWD400258	5 Ø200	2 Ø 200	B2
-	-	-	PWD400264	5 Ø200	2 Ø 200	B2

AERMEC

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• VED-I 530/532/540/541	-	-	-
• VED-I 730/732/740/741	-	-	-
• LCI-D 270	-	-	-
• LCI-D 141/161 • LCI-D 1400/1600	-	-	-
• LCI-D 350/500	PWD400065	4 Ø 125-150	2 Ø 200
• LCI-D 071/086/101/121 • LCI-D 700/850/1000/1200	-	-	-
• FCZI P 200/201/202/250	-	-	-
• FCZI P 300/301/302/350	-	-	-
• FCZI P 400/401/402/450/500/501/502/550	-	-	-
• FCZI P 700/701/702/750/900/901/950	-	-	-
• LCG-D 350	PWD400292	3 Ø 125-150	2 Ø 200
• LCG-D 500	-	-	-
• LCG-D 700/850	-	-	-
• LCG-D 1000	-	-	-
• LCG-D 1200/1400/1600	-	-	-
• VED 030/040	PWD400299	3 Ø 125-150	2 Ø 200
• VED 130/140	PWD400300	4 Ø 125-150	2 Ø 200
• VED 230/240	-	-	-
• VED 330/340	-	-	-
• MLG-D 250 • MLG-D 350	PWD400167	4 Ø 125-150	2 Ø 200
• MLG-D 500	-	-	-

GENERAL

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ARHG LLTB 12	PWD400056	4 Ø 125-150	2 Ø 200
• ARHG LLTB 14	PWD400056	4 Ø 125-150	2 Ø 200
• ARHG LLTB 18	-	-	-
• ARHG LMLA/LE 24-30-36-45*(con flangia di mandata da 1065x208) • ARXG-KMLA 22/24/30/36/45*(con flangia di mandata da 1065x208)	-	-	-
• ARHG-LHTBP 12/14	-	-	-
• ARHG-LHTBP 18/24/30	-	-	-
• ARHG-LHTBP 36/45/54	-	-	-
• ARHG-LHTA 45/54	-	-	-
• ARXG-KLLAP 09/12/14	PWD400057	4 Ø 125-150	2 Ø 200
• ARXG-KLLAP 18	-	-	-
• ARXG-KHTAP 12/14	-	-	-
• ARXG-KHTAP 18/22/24/30	-	-	-
• ARXG-KHTAP 36/45/54	-	-	-
• ARXG-KHTA 45/54	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
-	-	-	11162120	4 Ø 200	2 Ø 200	B2
-	-	-	11162121	6 Ø 200	2 Ø 200	B2
-	-	-	11162122	3 Ø 150	2 Ø 150	A1
-	-	-	11162123	4 Ø 150	2 Ø 150	A1
PL11163200	4 Ø 150-200	2 Ø 200	11163200	4 Ø 150	2 Ø 150	A1
PL11163201	4 Ø 150-200	2 Ø 200	11163201	4 Ø 150	2 Ø 150	A1
PWD400175	3 Ø 150-200	2 Ø200	PWD400188	2 Ø 200	2 Ø 200	B2
PWD400176	3 Ø 150-200	2 Ø200	PWD400189	3 Ø 200	2 Ø 200	B2
PWD400177	4 Ø 150-200	2 Ø200	PWD400190	4 Ø 200	2 Ø 200	B2
PWD400178	5 Ø 150-200	2 Ø200	PWD400191	4 Ø 200	2 Ø 200	B2
PWD400268	3 Ø150200	2 Ø200	PWD400243	3 Ø 150	2 Ø 150	A1
PWD400101	4 Ø 150 200	2 Ø 200	PWD400095	4 Ø 150	2 Ø 150	E5
PWD400110	5 Ø 150-200	2 Ø 200	PWD400152	6 Ø 150	2 Ø150	A1
PWD400103	3 Ø 150 200	2 Ø 200	PWD400097	3 Ø 200	2 Ø 200	B2
PWD400104	5 Ø 150 200	2 Ø 200	PWD400098	5 Ø 200	2 Ø 200	B2
-	-	-	PWD400252	2 Ø 150	2 Ø 150	A1
PWD400278	3 Ø150200	2 Ø200	PWD400253	4 Ø 150	2 Ø 150	A1
PWD400279	4 Ø 150-200	2 Ø 200	PWD400254	5 Ø 150	2 Ø 150	A1
PWD400280	5 Ø 150-200	2 Ø200	PWD400255	5 Ø 150	2 Ø 150	A1
PWD400173	3 Ø 150-200	2 Ø 200	PWD400185	3 Ø 150	2 Ø 150	A1
PL11165111	4 Ø 150-200	2 Ø 200	11165111	4 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162027	3 Ø 150-200	2 Ø 200	11162027	3 Ø 150	2 Ø 150	A1
PL11162027	3 Ø 150-200	2 Ø 200	11162027	3 Ø 150	2 Ø 150	A1
PL11162030	4 Ø 150-200	2 Ø 200	11162030	4 Ø 150	2 Ø 150	A1
PL11162028	5 Ø 150-200	2 Ø 200	11162028	4 Ø 200	2 Ø 200	B2
PL11162000	4 Ø 150-200	2 Ø 200	11162000	2 Ø 200	2 Ø 200	B2
PWD400284	4 Ø 150-200	2 Ø 200	PWD400259	3 Ø 200	2 Ø 200	B2
PL11162001	5 Ø 150-200	2 Ø 200	11162001	5 Ø 200	2 Ø 200	B2
-	-	-	11162025	3 Ø 200	2 Ø 200	B2
PL11162026	3 Ø 150-200	3 Ø 200	11162026	3 Ø 150	2 Ø 150	A1
PWD400131	4 Ø 150-200	2 Ø 200	PWD400147	4 Ø 150	2 Ø 150	A1
PL11162000	4 Ø 150-200	2 Ø 200	11162000	2 Ø 200	2 Ø 200	B2
PWD400284	4 Ø 150-200	2 Ø 200	PWD400259	3 Ø 200	2 Ø 200	B2
PL11162001	5 Ø 150-200	2 Ø 200	11162001	5 Ø 200	2 Ø 200	B2
-	-	-	11162025	3 Ø 200	2 Ø 200	B2

Midea

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• MTBD 35 • MTBE 35	PWD400061	3 Ø 125-150	2 Ø 200
• MTBD 52/70 • MTBE 52/70	PWD400062	4 Ø 125-150	2 Ø 200
• MTBD 88 • MTBE 88	-	-	-
• MTBD 105/140/160 • MTBE 105/140/160	-	-	-
• MTII FNXDO 09 NEW • MTIU-HWFNX 12 • MTIU FNXDO 12	PWD400063	3 Ø 125-150	2 Ø 200
• MTI FNXDO 18 NEW • MTIU-HWFNX 18	PWD400064	4 Ø 125-150	2 Ø 200
• MTI FNXDO 24 NEW • MTIU-HWFNX 24	-	-	-
• MTI FNXDO 36 NEW • MTIU-HWFNX 30-36	-	-	-

argo

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ADIC S 10 • ADIB S 13	-	-	-
• SDIB S 9 • SDIA S 8	-	-	-
• GUD PS/A-T 35	PWD400099	3 Ø 125-150	2 Ø 200
• GUD PS/A-T 50	-	-	-
• GUD PS/A-T 71 • GUD PS/A-T 85	-	-	-
• GUD PHS/A-T 71 • GUD PHS/A-T 85	-	-	-
• GUD PHS/A-T 100	-	-	-
• GUD PHS/A-T 140 • GUD PHS/A-T 160	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162144	2 Ø 150-200	2 Ø 200	11162140	2 Ø 150	2 Ø 150	A1
PL11162141	3 Ø 150-200	2 Ø 200	11162141	3 Ø 150	2 Ø 150	A1
-	-	-	-	-	-	-
PL11162143	4 Ø 150-200	2 Ø 200	11162143	5 Ø 200	2 Ø 200	B2
PWD400022	2 Ø 150-200	2 Ø 200	PWD400005	2 Ø 150	2 Ø 150	A1
PWD400027	3 Ø 150-200					
PWD400023	3 Ø 150-200	2 Ø 200	PWD400007	3 Ø 150	2 Ø 150	A1
PWD400024	4 Ø 150-200	2 Ø 200	PWD400009	4 Ø 150	2 Ø 150	A1
PWD400025	5 Ø 150-200	2 Ø 200	PWD400011	6 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162078	4 Ø 150-200	2 Ø 200	11162078	4 Ø 200	2 Ø 200	B2
-	-	-	11163003	4 Ø 150	2 Ø 150	A1
PWD400100	3 Ø 150 200	2 Ø 200	PWD400094	3 Ø 150	2 Ø 150	E5
PWD400101	4 Ø 150 200	2 Ø 200	PWD400095	4 Ø 150	2 Ø 150	E5
PWD400102	5 Ø 150 200	2 Ø 200	PWD400096	6 Ø 150	2 Ø 150	E5
-	-	-	PWD400352	3 Ø 200	2 Ø 200	B2
PWD400103	3 Ø 150 200	2 Ø 200	PWD400097	3 Ø 200	2 Ø 200	B2
PWD400104	5 Ø 150 200	2 Ø 200	PWD400098	5 Ø 200	2 Ø 200	B2

VIESMANN

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• 300-S/HE DF 3028 M2	PWD400058	4 Ø125-150	2 Ø 200
• 300-S/HE DF 3053 M2	-	-	-
• 300-S/HE DF 3035 M2	PWD400167	4 Ø 125-150	2 Ø 200
• 242-S/HE D 2035 M1	PWD400099	3 Ø 125-150	2 Ø 200
• 242-S/HE D 2050 M1 • 300-S/HE DF 3053 M3 • 333-S DVL 3045/3056 M2 • 242-S D 2050 M2	-	-	-
• 242-S/HE D 2071 M1	-	-	-
• 242-S/HE D 2100 M1	-	-	-
• 300-S/HE DF 3028 M3 • 300-S/HE DF 3035 M3 • 333-S DVL 3036 M2 • 242-S D 2035 M2	PWD400292	3 Ø 125-150	2 Ø 200
• 242-S DH2071M1	-	-	-
• 242-S DH2085M1	-	-	-
• 242-S D20125M1	-	-	-
• 333-S DVHP3036M1 • 333-S DVHP3045M1	-	-	-
• 333-S DVHP3056M1 • 333-S DVHP3071M1	-	-	-
• 242-S D2071M2	-	-	-
• 242-S D20100M2 • 242-S D20125M2	-	-	-

tekno point®

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• DBIS 9 • DBIS 12	PWD400293	3 Ø 125-150	2 Ø 200
• DBIS 18	-	-	-
• DBIS 24	-	-	-
• DBIS 36	-	-	-
• DBIS 48	-	-	-
• DBIS 12 PLUS	PWD400361	3 Ø 125-150	2 Ø 200
• DBIS 18 PLUS	PWD400361	3 Ø 125-150	2 Ø 200

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
-	-	-	11162072	3 Ø 150	2 Ø 150	A1
PL11165111	4 Ø 150-200	2 Ø 200	11165111	4 Ø 150	2 Ø 150	A1
PWD400173	3 Ø 150-200	2 Ø 200	PWD400185	3 Ø 150	2 Ø 150	A1
PWD400100	3 Ø 150-200	2 Ø 200	PWD400094	3 Ø 150	2 Ø 150	E5
PWD400101	4 Ø 150- 200	2 Ø 200	PWD400095	4 Ø 150	2 Ø 150	A1
PWD400102	5 Ø 150-200	2 Ø200	PWD400096	6 Ø150	2 Ø 150	E5
PWD400103	3 Ø 150-200	2 Ø 200	PWD400097	3 Ø 200	2 Ø 200	B2
PWD400268	3 Ø150-200	2 Ø 200	PWD400243	3 Ø 150	2 Ø 150	A1
-	-	-	PWD400352	3 Ø 200	2 Ø 200	B2
-	-	-	PWD400352	3 Ø 200	2 Ø 200	B2
PWD400104	5 Ø 150-200	2 Ø 200	PWD400098	5 Ø 200	2 Ø 200	B2
PWD400405	2 Ø150-200	2 Ø 200	PWD400404	2 Ø 200	2 Ø 200	B2
PWD400407	3 Ø150-200	2 Ø 200	PWD400406	3 Ø 200	2 Ø 200	B2
PWD400415	4 Ø 150- 200	2 Ø 200	PWD400413	3 Ø 200	2 Ø 200	B2
PWD400416	5 Ø 150-200	2 Ø 200	PWD400414	5 Ø 200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400269	2 Ø 150-200	2 Ø 200	PWD400244	3 Ø 150	2 Ø 150	A1
PWD400270	4 Ø 150-200	2 Ø 200	PWD400245	4 Ø 150	2 Ø 150	A1
PWD400358	5 Ø 150-200	2 Ø 200	PWD400355	5 Ø 150	2 Ø 150	A1
PWD400359	5 Ø 150-200	2 Ø 200	PWD400356	5 Ø 150	2 Ø 150	A1
PWD400359	5 Ø 150-200	2 Ø 200	PWD400356	5 Ø 150	2 Ø 150	A1
PWD400360	2 Ø 150-200	2 Ø 200	PWD400357	2 Ø 150	2 Ø 150	A1
PWD400360	2 Ø 150-200	2 Ø 200	PWD400357	2 Ø 150	2 Ø 150	A1

parkair energy solutions

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• DI-M 12	PWD400061	3 Ø 125-150	2 Ø 200
• DI-M 18	-	-	-
• DI-M 24	PWD400062	4 Ø 125-150	2 Ø 200
• DI-M 50/60	-	-	-
• DI-H 18	-	-	-
• DI-H 24	-	-	-
• DI-C 12	-	-	-
• DI-C 18	-	-	-
• DI-C 24	-	-	-
• DI-C 36	-	-	-
• DI-C 48/60	-	-	-
• DI-M 09S/12S • PRK-DI- 09E/12E	PWD400293	3 Ø 125-150	2 Ø 200
• DI-M 18S • PRK-DI- 18E	-	-	-
• DI-M 24S • PRK-DI- 24E	-	-	-

HOKKAIDO

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• HUCU-ZAL 350	PWD400063	3 Ø 125-150	2 Ø 200
• HUCU-ZAL 530	PWD400064	4 Ø 125-150	2 Ø 200
• HUCI-ZA 710	-	-	-
• HUCI-ZA 1080	-	-	-
• HUCI-ZA 1400	-	-	-

Hermann Saunier Duval

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• SDH 17 NDI 50	PWD400065	4 Ø 125-150	2 Ø 200
• SDH 17 NDI 070/090/105	-	-	-
• SDH 17 NDI 140/140	-	-	-
• SDH 19 IDNI 50	-	-	-
• SDH 19 IDNI 100	PWD400121	4 Ø 125-150	2 Ø 200
• SDH 19 IDNI 140	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162144	2 Ø 150-200	2 Ø 200	11162140	2 Ø 150	2 Ø 150	A1
PL11162200	3 Ø 150-200	2 Ø 200	-	-	-	-
PL11162141	3 Ø 150-200	2 Ø 200	11162141	3 Ø 150	2 Ø 150	A1
PL11162143	4 Ø 150-200	2 Ø 200	11162143	5 Ø 200	2 Ø 200	B2
-	4 Ø 150-200	2 Ø 200	11165132	4 Ø 150	2 Ø 150	A1
-	-	-	11165133	6 Ø 150	2 Ø 150	A1
-	-	-	PWD400158	2 Ø 150	2 Ø 150	A1
-	-	-	PWD400159	3 Ø 150	2 Ø 150	A1
-	-	-	PWD400179	3 Ø 200	2 Ø 200	B2
PWD400165	5 Ø 150-200	2 Ø200	PWD400180	4 Ø 200	2 Ø 200	B2
-	-	-	PWD400181	2 Ø 200	2 Ø 200	B2
PWD400269	2 Ø 150-200	2 Ø 200	PWD400244	3 Ø 150	2 Ø 150	A1
PWD400270	4 Ø 150-200	2 Ø 200	PWD400245	4 Ø 150	2 Ø 150	A1
PWD400358	5 Ø 150-200	2 Ø 200	PWD400355	5 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400027	3 Ø 150-200	2 Ø 200	PWD400005	2 Ø 150	2 Ø 150	A1
PWD400023	3 Ø 150-200	2 Ø 200	PWD400007	3 Ø 150	2 Ø 150	A1
PWD400024	4 Ø 150-200	2 Ø 200	PWD400009	4 Ø 150	2 Ø 150	A1
PWD400025	5 Ø 150-200	2 Ø 200	PWD400011	6 Ø 150	2 Ø 150	A1
PWD400026	4 Ø 150-200	2 Ø 200	PWD400012	4 Ø 200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11163200	4 Ø 150-200	2 Ø 200	11163200	4 Ø 150	2 Ø 150	A1
PL11163201	4 Ø 150-200	2 Ø 200	11163201	4 Ø 150	2 Ø 150	A1
-	-	-	11162123	4 Ø 150	2 Ø 150	A1
PWD400109	4 Ø 150-200	2 Ø 200	PWD400095	4 Ø 150	2 Ø150	A1
PWD400134	3 Ø 150-200	2 Ø 200	PWD400153	3 Ø 150	2 Ø150	A1
PWD400135	5 Ø 150-200	2 Ø 200	PWD400154	6 Ø 150	2 Ø150	A1

SABIANA

THE FRIENDLY CLIMATE

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• CRSL-ECM 1 **con flangia di mandata FMD	-	-	-
• CRSL-ECM 2 **con flangia di mandata FMD	-	-	-
• CRSL-ECM 4 **con flangia di mandata FMD	-	-	-

Hisense

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ADT UX4SNL3 26/35	-	-	-
• ADT UX4SKL3 52	-	-	-
• AUD UX4SLL3 71	-	-	-
• AUD UX4SHH3 105/125/140/175	-	-	-
• AUD UX4RHH5 125/140/175	-	-	-
• ADT UX4RBL4 26/35 • ADT UX4RBL8 26/35	PWD400122	4 Ø 125-150	2 Ø 200
• ADT UX4RCL4 52/71 • ADT UX4RCL8 52/71 • ADT UX4RBL4 52/71	-	-	-
• AUD UX4RDH4 90/105	-	-	-

fiorini®

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ADIC S 10 • ADIB S 13	-	-	-

THERMOMEC

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• SLCZ 12	PWD400061	3 Ø 125-150	2 Ø 200
• SLCZ 18/24	PWD400062	4 Ø 125-150	2 Ø 200
• SLCZ 36/48/55	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400170	3 Ø 150-200	2 Ø200	PWD400182	3 Ø 150	2 Ø 150	A1
PWD400171	4 Ø 150-200	2 Ø200	PWD400183	4 Ø150	2 Ø 150	A1
PWD400172	5 Ø 150-200	2 Ø200	PWD400184	5 Ø150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400018	3 Ø 150-200	2 Ø 200	PWD400004	3 Ø 150	2 Ø 150	A1
PWD400019	4 Ø 150-200	2 Ø 200	PWD400002	5 Ø 150	2 Ø 150	A1
PWD400020	4 Ø 150-200	2 Ø 200	-	-	-	-
PWD400021	5 Ø 150-200	2 Ø 200	PWD400003	5 Ø 200	2 Ø 200	B2
PWD400021	5 Ø 150-200	2 Ø 200	PWD400003	5 Ø 200	2 Ø 200	B2
PWD400136	3 Ø 150-200	2 Ø200	PWD400155	3 Ø 150	2 Ø 150	A1
			PWD400198	4 Ø 150	2 Ø 150	A1
PWD400137	4 Ø 150-200	2 Ø200	PWD400156	5 Ø 150	2 Ø 150	A1
			PWD400199	4 Ø 150	2 Ø 150	A1
PWD400138	4 Ø 150-200	2 Ø200	PWD400157	4 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162078	4 Ø 150-200	2 Ø 200	11162078	4 Ø 200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162144	2 Ø 150-200	2 Ø 200	11162140	2 Ø 150	2 Ø 150	A1
PL11162141	3 Ø 150-200	2 Ø 200	11162141	3 Ø 150	2 Ø 150	A1
PL11162143	4 Ø 150-200	2 Ø 200	11162143	4 Ø 200	2 Ø 200	B2

EMMETI

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• EIDH S 1214	PWD400068	4 Ø 125-150	2 Ø 200
• EIDH S 1814/2414	-	-	-
• X-REVO-D 0919/1219	-	-	-
• X-REVO-D 1819	-	-	-

UNICAL

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• CN 09 3500 W • CN 09 3500 W	PWD400061	3 Ø 125-150	2 Ø 200
• CN 09 5300/7100 W	PWD400062	4 Ø 125-150	2 Ø 200
• CN 09 10500/17600 W	-	-	-
• CN 10 H 18 • CN 11 H 18	PWD400064	4 Ø 125-150	2 Ø 200
• CN 10 H 24 • CN 11 H 24	-	-	-
• CN 10 H 36 • CN 11 H 36	-	-	-

IDEMA Climatizzatori d'aria www.idemaclima.com

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ITKE 53	PWD400064	4 Ø 125-150	2 Ø 200
• ITKE 70	-	-	-
• ITKE 105	-	-	-
• ITKE 140/160	-	-	-

BAXI

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• RZGND 50/70	-	-	-
• RZGND 100/140/160	-	-	-
• IQD 30	PWD400449	3 Ø 125-150	2 Ø 200
• IQD 40	PWD400451	4 Ø 125-150	2 Ø 200
• IQD 60	-	-	-
• IQD 80	-	-	-
• IQD 110	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11165110	3 Ø 150-200	2 Ø 200	11165110	3 Ø 150	2 Ø 150	A1
PL11165112	4 Ø 150-200	2 Ø 200	11165112	5 Ø 150	2 Ø 150	A1
PWD400136	3 Ø 150-200	2 Ø200	PWD400155	3 Ø 150	2 Ø 150	A1
PWD400137	4 Ø 150-200	2 Ø200	PWD400156	5 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PL11162144	2 Ø 150-200	2 Ø 200	11162140	2 Ø 150	2 Ø 150	A1
PL11162141	3 Ø 150-200	2 Ø 200	11162141	3 Ø 150	2 Ø 150	A1
PL11162143	4 Ø 150-200	2 Ø 200	11162143	4 Ø 150	2 Ø 150	B2
PWD400023	3 Ø 150-200	2 Ø 200	PWD400007	3 Ø 150	2 Ø 150	A1
PWD400024	4 Ø 150-200	2 Ø 200	PWD400009	4 Ø 150	2 Ø 150	A1
PWD400025	5 Ø 150-200	2 Ø 200	PWD400011	6 Ø 150	2 Ø 150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400023	3 Ø 150-200	2 Ø 200	PWD400007	3 Ø150	2 Ø150	A1
PWD400024	4 Ø 150-200	2 Ø 200	PWD400009	4 Ø150	2 Ø150	A1
PWD400025	5 Ø 150-200	2 Ø 200	PWD400011	6 Ø150	2 Ø150	A1
PWD400026	4 Ø 150-200	2 Ø 200	PWD400012	4 Ø200	2 Ø 200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE			SINGLE PLENUM INSULATED METAL SHEET/PAL			
CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400378	4 Ø 150-200	2 Ø 200	PWD400374	4 Ø 150	2 Ø 150	A1
PWD400379	5 Ø 150-200	2 Ø 200	PWD400375	6 Ø 150	2 Ø 150	A1
PWD400450	3 Ø 150-200	2 Ø 200	PWD400426	3 Ø150	2 Ø 150	A1
PWD400452	3 Ø 150-200	2 Ø 200	PWD400427	3 Ø150	2 Ø 150	A1
PWD400453	4 Ø 150-200	2 Ø 200	PWD400428	5 Ø150	2 Ø 150	A1
PWD400454	5 Ø 150-200	2 Ø 200	PWD400429	6 Ø150	2 Ø 150	A1
-	-	-	PWD400430	8 Ø150	2 Ø 150	A1

sinclair AIR CONDITIONING

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ASD-BI2 12	PWD400292	3 Ø 125-150	2 Ø 200
• ASD-BI2 18	-	-	-
• ASD-BI2 24	-	-	-
• ASD-BI2 36	-	-	-
• ASD-BI2 42/48	-	-	-

CLIMAVENETA

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• a-HWD2 / i-HDW2 102/104 • a-HWD2 / i-HDW2 202/204 • a-HWD2 / i-HDW2 302	-	-	-
• a-HWD2 / i-HDW2 402/404 • a-HWD2 / i-HDW2 502/504 • a-HWD2 / i-HDW2 602	-	-	-
• a-HWD2 / i-HDW2 702/704 • a-HWD2 / i-HDW2 802/804 • a-HWD2 / i-HDW2 902	-	-	-

VAILLANT

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• VA 1 - DN 020	PWD400463	3 Ø125-150	2 Ø 200
• VA 1 - DN 040	PWD400451	4 Ø125-150	2 Ø 200
• VA 1 - DN 060	-	-	-
• VA 1 - DN 090	-	-	-
• VA 1 - DN 110	-	-	-

MAXA

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• DUCT-R 35	PWD400063	3 Ø125-150	2 Ø 200
• DUCT-R 53	PWD400064	4 Ø125-150	2 Ø 200
• DUCT-R 71	-	-	-
• DUCT-R 105	-	-	-
• DUCT-R 130/176	-	-	-

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400268	3 Ø150-200	2 Ø 200	PWD400243	3 Ø150	2 Ø150	A1
PWD400101	4 Ø150-200	2 Ø 200	PWD400095	4 Ø150	2 Ø150	A1
PWD400415	4 Ø150-200	2 Ø 200	PWD400413	3 Ø200	2 Ø200	B2
PWD400416	4 Ø150-200	2 Ø 200	PWD400414	5 Ø200	2 Ø200	B2
PWD400466	4 Ø150-200	2 Ø 200	PWD400465	5 Ø200	2 Ø200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
-	-	-	PWD400432	3 Ø200	2 Ø200	B2
PWD400455	5 Ø150-200	2 Ø 200	PWD400433	5 Ø200	2 Ø200	B2
-	-	-	PWD400434	6 Ø200	2 Ø200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400464	2 Ø150-200	2 Ø 200	PWD400440	2 Ø150	2 Ø150	A1
PWD400452	3 Ø150-200	2 Ø 200	PWD400427	3 Ø150	2 Ø150	A1
PWD400453	4 Ø150-200	2 Ø 200	PWD400428	5 Ø150	2 Ø150	A1
-	-	-	PWD400441	7 Ø150	2 Ø150	A1
-	-	-	PWD400430	8 Ø150	2 Ø150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400027	3 Ø150-200	2 Ø 200	PWD400005	2 Ø150	2 Ø150	A1
PWD400023	3 Ø150-200	2 Ø 200	PWD400007	3 Ø150	2 Ø150	A1
PWD400024	4 Ø150-201	2 Ø 200	PWD400009	4 Ø150	2 Ø150	A1
PWD400025	5 Ø150-202	2 Ø 200	PWD400011	6 Ø150	2 Ø150	A1
PWD400026	4 Ø150-203	2 Ø 200	PWD400012	4 Ø200	2 Ø200	B2

STELBI

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• M9ID 9 • M/C9ID 12	PWD400063	3 Ø125-150	2 Ø 200
• M/C9ID 18	PWD400064	4 Ø125-150	2 Ø 200
• C9ID 24	-	-	-
• C9ID 36	-	-	-
• C9ID 48 • C9ID 60	-	-	-

STORM

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
• ST 17145 • ST 17146	PWD400167	4 Ø125-150	2 Ø 200
• ST 17147	-	-	-
• ST 17151	PWD400292	3 Ø125-150	2 Ø 200
• ST 17153	-	-	-
• ST 17155 • ST 17157	-	-	-

NEW

TOYOTOMI

SINGLE PLENUM "MINI EOLO" IN SINTERED POLYSTYRENE

	CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED
		N° COLLARS / Ø mm	N° COLLARS / Ø mm
NEW • DCT IUINVR32 12	PWD400292	3 Ø125-150	2 Ø 200
NEW • DCT IUINVR32 18	-	-	-
NEW • DCT IUINVR32 24	-	-	-
NEW • DCT IUINVR32 36 NEW • DCT IUINVR32 42	-	-	-
NEW • DCT IUINVR32 48	-	-	-

THE RANGE OF PLENUM FOR DUCTED AIR CONDITIONING UNITS MORE COMPLETE AND AVAILABLE PRESENT ON THE MARKET

OUR CATALOGUE CONTAINS ALL THE MAKES AND MODELS OF DUCTED AIR CONDITIONING UNITS CURRENTLY MANUFACTURED

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400022	2 Ø150-200	2 Ø 200	PWD400005	2 Ø150	2 Ø150	A1
PWD400027	3 Ø150-200	2 Ø 200				
PWD400023	3 Ø150-200	2 Ø 200	PWD400007	3 Ø150	2 Ø150	A1
PWD400024	4 Ø150-200	2 Ø 200	PWD400009	4 Ø150	2 Ø150	A1
PWD400025	5 Ø150-200	2 Ø 200	PWD400011	6 Ø150	2 Ø150	A1
PWD400026	4 Ø150-200	2 Ø 200	PWD400012	4 Ø200	2 Ø200	B2

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400173	3 Ø150-200	2 Ø 200	PWD400185	3 Ø150	2 Ø150	A1
PL11165111	4 Ø150-200	2 Ø 200	11165111	4 Ø150	2 Ø150	A1
PWD400268	3 Ø150-200	2 Ø 200	PWD400243	3 Ø150	2 Ø150	A1
PWD400101	4 Ø150-200	2 Ø 200	PWD400095	4 Ø150	2 Ø150	A1
PWD400102	5 Ø150-200	2 Ø 200	PWD400096	6 Ø150	2 Ø150	A1

SINGLE PLENUM "EOLO" IN SINTERED POLYSTYRENE

SINGLE PLENUM INSULATED METAL SHEET/PAL

CODE	FRONT COLLAR INCLUDED	SIDE COLLAR INCLUDED	CODE	FRONT SPIGOTS INCLUDED*	SIDE SPIGOTS INCLUDED*	COLLAR TO BE ORDER EXTRA*
	N° COLLARS / Ø mm	N° COLLARS / Ø mm		N° SPIGOTS / Ø mm	N° SPIGOTS / Ø mm	MODEL
PWD400268	3 Ø150-200	2 Ø 200	PWD400243	3 Ø150	2 Ø150	A1
PWD400101	4 Ø150-200	2 Ø 200	PWD400095	4 Ø150	2 Ø150	A1
PWD400415	4 Ø150-200	2 Ø 200	PWD400413	3 Ø 200	2 Ø 200	B2
PWD400416	5 Ø150-200	2 Ø 200	PWD400414	5 Ø 200	2 Ø 200	B2
PWD400466	5 Ø150-200	2 Ø 200	PWD400465	5 Ø 200	2 Ø 200	B2

- GOODS AVAILABLE IN 5 WORKING DAYS FROM THE DATE OF ORDER.
- IN SOME CASES, WE CAN SUPPLY THE SUPPLY PLENUM IN PAL.
- THE SUGGESTION ABOUT THE COMPOSITION OF EACH PLENUM ARE INDICATIVE AND NOT BINDING. IT IS NECESSARY TO CHECK THAT ALL THE ELEMENTS OF THE PLENUM ARE COMPATIBLE WITH THE PROJECT SPECIFICATIONS OF THE SYSTEM.
- TECNOSYSTEMI S.P.A. SOCIETÒ BENEFIT IS NOT RESPONSIBLE IN CASE OF IMPROPER OR NEGLIGENT USE OF THE PRODUCT.
- THE ITEMS ON THE CATALOGUE HAVE BEEN DEVELOPED AND MADE ACCORDING TO OUR OWN TECHNICAL SPECIFICATIONS.
- FOR ADDITIONAL INFORMATION, PLEASE CONTACT OUR CUSTOMER SERVICE.

* ALUMINUM PLENUM COMES WITH PRE-DRILLED HOLES

* COLLARS ARE NOT INCLUDED IN THE KIT: CHECK PAGE 137 TO CHOOSE YOUR COLLAR

KITS TO COMPLETE THE "PROAIR" PACK SYSTEMS FOR AIR DISTRIBUTION

proAIR® pack RF-EOLO

proAIR® pack RF-L

proAIR® pack CAB-EOLO


proAIR® pack CAB-L

The "kit rapid" are designed for proair pack ventilation systems.
When creating a ducted air conditioning system, the pre-packaged kits facilitate the customer in choosing the items necessary for the distribution of air in the individual environments**, without the possibility of error.**


The "kit rapid" are available for the proair pack systems with **2 - 3 - 4 - 5 - 6 zones** with circular connections of ø 125 / 150 / 200 mm. The possibility of choosing between delivery nozzles with adjustable flaps, with 15° inclined flaps and with linear diffusers with 2 slots, provides everything needed to create and complete the installation of the ducted unit with high quality products, with every detail covered from a technical, functional and aesthetic point of view.

The regulation of the temperature and air flow of the single zone is managed by the proair pack system chronothermostats that are used to achieve the maximum performance and optimum comfort inside homes or offices.


Attention: the plenum is included in the proair pack




PROAIR PACK with Ø 125 connections and adjustable flap nozzles
PAG. 81




PROAIR PACK with Ø 150 connections and adjustable flap nozzles
PAG. 82-83



PROAIR PACK with Ø 200 connections and adjustable flap nozzles
PAG. 84-85



PROAIR PACK with Ø 150 connections and 15° inclined flap nozzles
PAG. 86-87



PROAIR PACK with Ø 150 connections and 15° inclined flap nozzles
PAG. 88-89

2 ZONE A

FOR PROAIR PACK
WITH Ø 125 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

THE KIT CONSISTS OF:

- 2 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161505
- 2 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100004
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 127 MM 10 M COD. 11152127
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 4 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 125 ET GRILLES À AILETTES RÉGLABLES

LE KIT SE COMPOSE DE:

- N°2 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100
- 2 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100004
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 127 MM DE 10 M CODE 11152127
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 4 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 125 UND EINSTELLBAREN LAMELLENLÜFTERN

DER BAUSATZ BESTEHT AUS:

- 2 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161505
- 2 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 132) COD. PWD100004
- 1X 10 M Ø 127 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152127
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 4 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500001	RAPID COMPLETION KIT FOR PROAIR PACK 2 ZONE WITH Ø 125 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

3 ZONE B

THE KIT CONSISTS OF:

- 3 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161505
- 3 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100004
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 127 MM 10 M COD. 11152127
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 6 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 3 BUSES D'ALIMENTATION ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM CODE WB11161505
- 3 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100004
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 127 MM DE 10 M CODE 11152127
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 6 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 3 ZUFUHRLUFTGITTER WEISS LACKIERTES ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161505
- 3 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 132) COD. PWD100004
- 1X 10 M Ø 127 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152127
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 6 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500002	RAPID COMPLETION KIT FOR PROAIR PACK 3 ZONE WITH Ø 125 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

4 ZONE C

THE KIT CONSISTS OF:

- 4 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161505
- 4 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100004
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 127 MM 10 M COD. 11152127
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 8 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 4 BUSES D'ALIMENTATION EN ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM CODE WB11161505
- 4 PLÉNUMS ISOLÉS AVEC CONNEXION ARRIÈRE POUR BUSE (332 X 132) CODE PWD100004
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 127 MM DE 10 M CODE 11152127
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 8 COLLIERS DE SERRAGE


DER BAUSATZ BESTEHT AUS:

- 4 ZUFUHRLUFTGITTER WEISS LACKIERTES ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM,
- 4 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 132) COD. PWD100004
- 1X 10 M Ø 127 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152127
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 8 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500003	RAPID COMPLETION KIT FOR PROAIR PACK 4 ZONE WITH Ø 125 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

A

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

2 ZONE Ø125 FOR MINI EOLO

B

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

3 ZONE Ø125 FOR MINI EOLO

C

Datasheet





INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

4 ZONE Ø125 FOR MINI EOLO

2 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

THE KIT CONSISTS OF:

- 2 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 2 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 4 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150ET GRILLES À AILETTES RÉGLABLES

LE KIT SE COMPOSE DE:

- 2 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM RÉF. WB11161512
- 2 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 4 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 125 UND EINSTELLBAREN LAMELLENLÜFTERN

DER BAUSATZ BESTEHT AUS:

- 2 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 2 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 182) COD. PWD100005
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 4 ROHRSCHELLEN

CODE	DESCRIPTION
11171722	RAPID COMPLETION KIT FOR PROAIR PACK 2 ZONE WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

3 ZONE B

THE KIT CONSISTS OF:

- 3 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 3 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 6 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 3 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM RÉF. WB11161512
- 3 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 6 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 3 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 3 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 182) COD. PWD100005
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 6 ROHRSCHELLEN

CODE	DESCRIPTION
11171723	RAPID COMPLETION KIT FOR PROAIR PACK 3 ZONE WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

4 ZONE C

THE KIT CONSISTS OF:

- 4 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 4 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 8 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 4 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM RÉF. WB11161512
- 4 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 8 COLLIERS DE SERRAGE


DER BAUSATZ BESTEHT AUS:

- 4 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 4 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 182) COD. PWD100005
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 8 ROHRSCHELLEN

CODE	DESCRIPTION
11171724	RAPID COMPLETION KIT FOR PROAIR PACK 4 ZONE WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

A

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

2 ZONE Ø150 FOR MINI EOLO

B

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

3 ZONE Ø150 FOR MINI EOLO

C

Datasheet





INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

4 ZONE Ø150 FOR MINI EOLO

5 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

THE KIT CONSISTS OF:

- 5 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 5 ISOLATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 10 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150ET GRILLES À AILETTES RÉGLABLES

LE KIT SE COMPOSE DE:

- 5 BUSES D'ALIMENTATION EN ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM CODE WB11161512
- 5 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 10 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 125 UND EINSTELLBAREN LAMELLENLÜFTERN

DER BAUSATZ BESTEHT AUS:

- 5 ZUFUHRLUFTGITTER WEISS LACKIERTES ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 5 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 182) COD. PWD100005
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 10 ROHRSCHELLEN

CODE	DESCRIPTION
11171725	RAPID COMPLETION KIT FOR PROAIR PACK 5 ZONE WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLEAS

6 ZONE B

THE KIT CONSISTS OF:

- 6 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 6 ISOLATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 12 HOSE CLAMPS

LE KIT SE COMPOSE DE:


- 6 BUSES D'ALIMENTATION EN ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM CODE WB11161512
- 6 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 12 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 6 ZUFUHRLUFTGITTER WEISS LACKIERTES ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 6 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 182) COD. PWD100005
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 12 ROHRSCHELLEN

CODE	DESCRIPTION
11171726	RAPID COMPLETION KIT FOR PROAIR PACK 6 ZONE WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

A

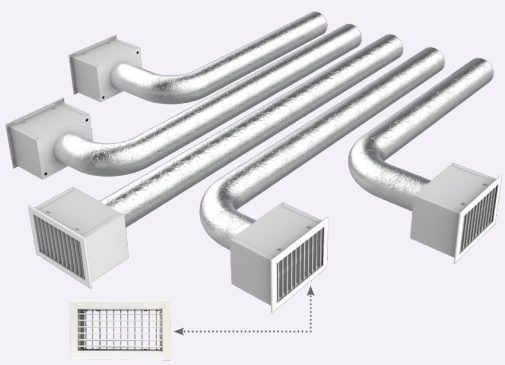


Datasheet



INTAKE GRILLE WITH FILTER
installation hole 1000 x 500mm

5 ZONE Ø150

B

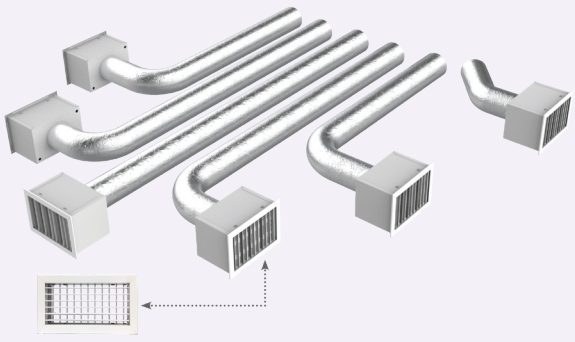

Datasheet



INTAKE GRILLE WITH FILTER
installation hole 1000 x 500mm

6 ZONE Ø150

2 ZONE A

FOR PROAIR PACK
WITH Ø 200 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

THE KIT CONSISTS OF:

- 2 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 200 MM, OUTER SIZE 332 X 232 MM COD. WB11161515
- 2 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 232) COD. PWD100007
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 203 MM 10 M COD. 11152204
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 4 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 200 ET GRILLES À AILETTES RÉGLABLES

LE KIT SE COMPOSE DE:

- 2 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 200 MM, DIMENSION EXTÉRIEURE 332 X 232 MM RÉF. WB11161515
- 2 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 232) CODE PWD100007
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 203 MM DE 10 M CODE 11152204
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 4 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 200 UND EINSTELLBAREN LAMELLENLÜFTERN

DER BAUSATZ BESTEHT AUS:

- 2 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 200 MM, AUSSENMASS 332 X 232 MM COD. WB11161515
- 2 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 232) COD. PWD100007
- 1X 10 M Ø 203 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152204
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 4 ROHRSCHELLEN

CODE	DESCRIPTION
11171732	RAPID COMPLETION KIT FOR PROAIR PACK 2 ZONE WITH Ø 200 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

3 ZONE B

THE KIT CONSISTS OF:

- 3 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 200 MM, OUTER SIZE 332 X 232 MM COD. WB11161515
- 3 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 232) COD. PWD100007
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 203 MM 10 M COD. 11152204
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 6 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 3 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 200 MM, DIMENSION EXTÉRIEURE 332 X 232 MM RÉF. WB11161515
- 3 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 232) CODE PWD100007
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 203 MM DE 10 M CODE 11152204
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 6 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 3 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 200 MM, AUSSENMASS 332 X 232 MM COD. WB11161515
- 3 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 232) COD. PWD100007
- 1X 10 M Ø 203 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152204
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 6 ROHRSCHELLEN

CODE	DESCRIPTION
11171733	RAPID COMPLETION KIT FOR PROAIR PACK 3 ZONE WITH Ø 200 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

4 ZONE C

THE KIT CONSISTS OF:

- 4 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 200 MM, OUTER SIZE 332 X 232 MM COD. WB11161515
- 4 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 232) COD. PWD100007
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 203 MM 10 M COD. 11152204
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 8 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 4 BUSES DE REFOULEMENT ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 200 MM, DIMENSION EXTÉRIEURE 332 X 232 MM RÉF. WB11161515
- 4 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 232) CODE PWD100007
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 203 MM DE 10 M CODE 11152204
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 8 COLLIERS DE SERRAGE


DER BAUSATZ BESTEHT AUS:

- 4 ZUFUHRLUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM, EINBAUÖFFNUNG 300 X 200 MM, AUSSENMASS 332 X 232 MM COD. WB11161515
- 4 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 232) COD. PWD100007
- 1X 10 M Ø 203 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152204
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 8 ROHRSCHELLEN

CODE	DESCRIPTION
11171734	RAPID COMPLETION KIT FOR PROAIR PACK 4 ZONE WITH Ø 200 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

A

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

2 ZONE Ø150 FOR MINI EOLO

B

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

3 ZONE Ø150 FOR MINI EOLO

C

Datasheet





INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

4 ZONE Ø150 FOR MINI EOLO

5 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

THE KIT CONSISTS OF:

- 5 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 5 ISOLATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 10 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150ET GRILLES À AILETTES RÉGLABLES

LE KIT SE COMPOSE DE:

- 5 BUSES D'ALIMENTATION EN ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM CODE WB11161512
- 5 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 10 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 125 UND EINSTELLBAREN LAMELLENLÜFTERN

DER BAUSATZ BESTEHT AUS:

- 5 ZUFUHRLUFTGITTER WEISS LACKIERTES ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 5 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 182) COD. PWD100005
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 10 ROHRSCHELLEN

CODE	DESCRIPTION
11171735	RAPID COMPLETION KIT FOR PROAIR PACK 5 ZONE WITH Ø 200 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

6 ZONE B

THE KIT CONSISTS OF:

- 6 WHITE PAINTED ALUMINIUM DELIVERY NOZZLES, INSTALLATION HOLE 300 X 100 MM, OUTER SIZE 332 X 132 MM COD. WB11161512
- 6 ISOLATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 182) COD. PWD100005
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 12 HOSE CLAMPS

LE KIT SE COMPOSE DE:


- 6 BUSES D'ALIMENTATION EN ALUMINIUM PEINT BLANC, TROU D'INSTALLATION 300 X 100 MM, DIMENSION EXTÉRIEURE 332 X 132 MM CODE WB11161512
- 6 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 182) CODE PWD100005
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 12 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 6 ZUFUHRLUFTGITTER WEISS LACKIERTES ALUMINIUM, EINBAUÖFFNUNG 300 X 100 MM, AUSSENMASS 332 X 132 MM COD. WB11161512
- 6 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 182) COD. PWD100005
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 12 ROHRSCHELLEN

CODE	DESCRIPTION
11171736	RAPID COMPLETION KIT FOR PROAIR PACK 6 ZONE WITH Ø 200 CONNECTIONS AND ADJUSTABLE FLAP NOZZLES

A

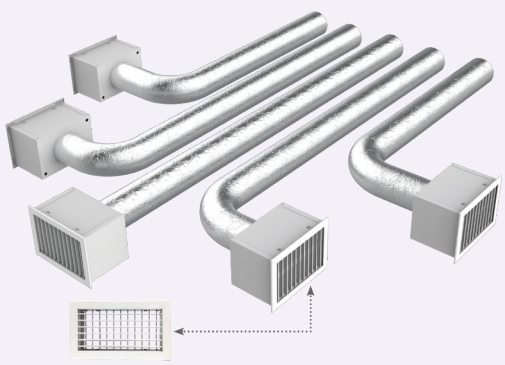


Datasheet



INTAKE GRILLE WITH FILTER
installation hole 1000 x 500mm

5 ZONE Ø200

B

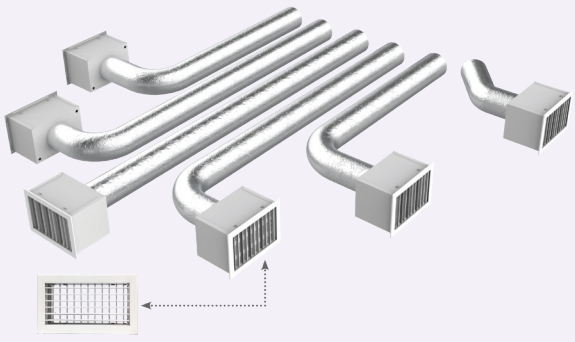

Datasheet



INTAKE GRILLE WITH FILTER
installation hole 1000 x 500mm

6 ZONE Ø200

2 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES

THE KIT CONSISTS OF:

- 2 WHITE PAINTED ALUMINIUM LINEAR NOZZLES WITH 15° TILTED FIXED FLAP FRAME - INSTALLATION HOLE 300 X 150 MM OUTER SIZE 335 X 185 MM COD. PWC100010
- 2 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100005
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 4 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150 ET GRILLES À AILETTES INCLINÉES À 15°

LE KIT SE COMPOSE DE:

- 2 BUSES LINÉAIRES EN ALUMINIUM PEINT EN BLANC AVEC CADRE À AILETTES FIXES INCLINÉES À 15° - TROU D'INSTALLATION 300 X 150 MM, TAILLE EXTÉRIEURE 335 X 185 MM CODE PWC100010
- 2 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100005
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 4 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø150 UND 15°-GENEIGTEN SCHRÄGFLÜGELDÜSEN

DER BAUSATZ BESTEHT AUS:

- 2 LINEARE LUFTGITTERN AUS WEISS LACKIERTEM ALUMINIUM MIT 15° SCHRÄG STEHENDEN FESTEN KLAPPEN - EINBAUÖFFNUNG 300 X 150 MM AUSSENMASS 335 X 185 MM COD. PWC100010
- 2 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 132) COD. PWD100005
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 4 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500004	RAPID COMPLETION KIT FOR PROAIR PACK 2 ZONES WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES

3 ZONE B

THE KIT CONSISTS OF:

- 3 WHITE PAINTED ALUMINIUM LINEAR NOZZLES WITH 15° TILTED FIXED FLAP FRAME - INSTALLATION HOLE 300 X 150 MM OUTER SIZE 335 X 185 MM COD. PWC100010
- 3 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100005
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 6 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 3 BUSES LINÉAIRES EN ALUMINIUM PEINT EN BLANC AVEC CADRE À AILETTES FIXES INCLINÉES À 15° - TROU D'INSTALLATION 300 X 150 MM, TAILLE EXTÉRIEURE 335 X 185 MM CODE PWC100010
- 3 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100005
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 6 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 3 LINEARE LUFTGITTERN AUS WEISS LACKIERTEM ALUMINIUM MIT 15° SCHRÄG STEHENDEN FESTEN KLAPPEN - EINBAUÖFFNUNG 300 X 150 MM AUSSENMASS 335 X 185 MM COD. PWC100010
- 3 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 132) COD. PWD100005
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 6 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500005	RAPID COMPLETION KIT FOR PROAIR PACK 3 ZONES WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES

4 ZONE C

THE KIT CONSISTS OF:

- 4 WHITE PAINTED ALUMINIUM LINEAR NOZZLES WITH 15° TILTED FIXED FLAP FRAME - INSTALLATION HOLE 300 X 150 MM OUTER SIZE 335 X 185 MM COD. PWC100010
- 4 INSULATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100005
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 8 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 4 BUSES LINÉAIRES EN ALUMINIUM PEINT EN BLANC AVEC CADRE À AILETTES FIXES INCLINÉES À 15° - TROU D'INSTALLATION 300 X 150 MM, TAILLE EXTÉRIEURE 335 X 185 MM CODE PWC100010
- 4 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100005
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 8 COLLIERS DE SERRAGE


DER BAUSATZ BESTEHT AUS:

- 4 LINEARE LUFTGITTERN AUS WEISS LACKIERTEM ALUMINIUM MIT 15° SCHRÄG STEHENDEN FESTEN KLAPPEN - EINBAUÖFFNUNG 300 X 150 MM AUSSENMASS 335 X 185 MM COD. PWC100010
- 4 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR LUFTGITTER (332 X 132) COD. PWD100005
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 8 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500006	RAPID COMPLETION KIT FOR PROAIR PACK 4 ZONES WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES





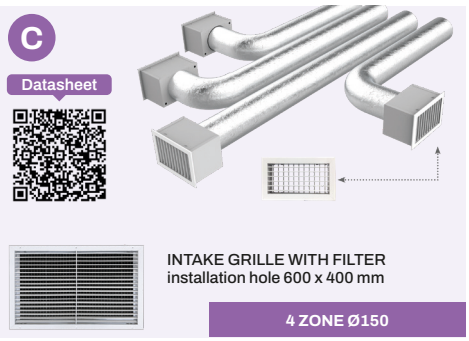

5 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES

THE KIT CONSISTS OF:

- 5 WHITE PAINTED ALUMINIUM LINEAR NOZZLES WITH 15° TILTED FIXED FLAP FRAME - INSTALLATION HOLE 300 X 150 MM OUTER SIZE 335 X 185 MM COD. PWC100010
- 5 ISOLATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100005
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 10 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150 ET GRILLES À AILETTES INCLINÉES À 15°

LE KIT SE COMPOSE DE:

- 5 BUSES LINÉAIRES EN ALUMINIUM PEINT EN BLANC AVEC CADRE À AILETTES FIXES INCLINÉES À 15° - TROU D'INSTALLATION 300 X 150 MM, TAILLE EXTÉRIEURE 335 X 185 MM CODE PWC100010
- 5 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100005
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 10 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø150 UND 15°-GENEIGTEN SCHRÄGFLÜGELDÜSEN

DER BAUSATZ BESTEHT AUS:

- 5 LINEARE LUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM MIT 15° SCHRÄG STEHENDEN FESTEN KLAPPEN - EINBAUÖFFNUNG 300 X 150 MM AUSSENMASS 335 X 185 MM COD. PWC100010
- 5 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 132) COD. PWD100005
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 10 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500007	RAPID COMPLETION KIT FOR PROAIR PACK 5 ZONES WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES

6 ZONE B

THE KIT CONSISTS OF:

- 6 WHITE PAINTED ALUMINIUM LINEAR NOZZLES WITH 15° TILTED FIXED FLAP FRAME - INSTALLATION HOLE 300 X 150 MM OUTER SIZE 335 X 185 MM COD. PWC100010
- 6 ISOLATED PLENUMS WITH REAR COUPLING FOR NOZZLE (332 X 132) COD. PWD100005
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 12 HOSE CLAMPS

LE KIT SE COMPOSE DE:


- 6 BUSES LINÉAIRES EN ALUMINIUM PEINT EN BLANC AVEC CADRE À AILETTES FIXES INCLINÉES À 15° - TROU D'INSTALLATION 300 X 150 MM, TAILLE EXTÉRIEURE 335 X 185 MM CODE PWC100010
- 6 PLÉNUMS ISOLÉS AVEC RACCORDEMENT ARRIÈRE POUR BUSE (332 X 132) CODE PWD100005
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 12 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 6 LINEARE LUFTGITTER AUS WEISS LACKIERTEM ALUMINIUM MIT 15° SCHRÄG STEHENDEN FESTEN KLAPPEN - EINBAUÖFFNUNG 300 X 150 MM AUSSENMASS 335 X 185 MM COD. PWC100010
- 6 GEDÄMMTE PLENUMS MIT HINTEREM ANSCHLUSS FÜR DIE LUFTGITTER (332 X 132) COD. PWD100005
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 12 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500008	RAPID COMPLETION KIT FOR PROAIR PACK 6 ZONES WITH Ø 150 CONNECTIONS AND 15° INCLINED FLAP NOZZLES

A

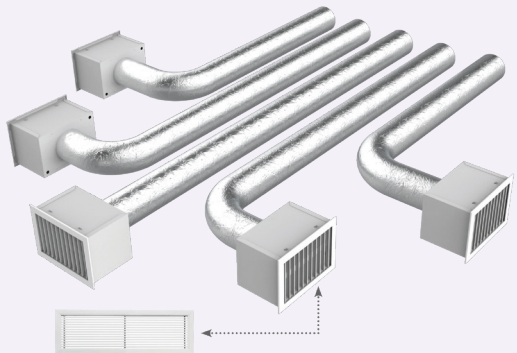


Datasheet



INTAKE GRILLE WITH FILTER
installation hole 1000 x 500mm

5 ZONE Ø150

B

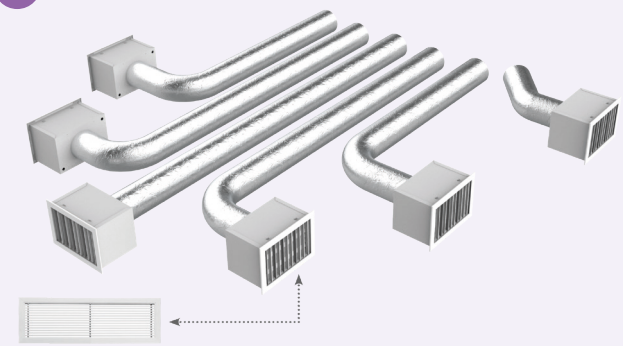

Datasheet



INTAKE GRILLE WITH FILTER
installation hole 1000 x 500mm

6 ZONE Ø150

2 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

THE KIT CONSISTS OF:

- 2 LINEAR DIFFUSERS WITH DAMPER, 2 SLOTS IN WHITE PAINTED ALUMINIUM L 1000 MM COD. PWC300021
- 2 INSULATED UNIVERSAL PLENUMS FOR LINEAR DIFFUSER 2 SLOTS L 1000 MM COD. PWD400329
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 4 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150 ET DIFFUSEURS LINÉAIRES L=1000 MM 2 FENTES

LE KIT SE COMPOSE DE:

- 2 DIFFUSEURS LINÉAIRES AVEC REGISTRE, 2 FENTES EN ALUMINIUM PEINT BLANC L 1000 MM CODE PWC300021
- 2 PLÉNUMS UNIVERSELS ISOLÉS POUR DIFFUSEUR LINÉAIRE 2 FENTES L 1000 MM CODE PWD400329
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 4 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 150 UND LINEAREN DIFFUSOREN 1000 MM 2 SCHLITZEN

DER BAUSATZ BESTEHT AUS:

- 2 LINEARE LUFTDURCHLÄSSE MIT KLAPPE, 2 WEISS LACKIERTE ALUMINIUMSCHLITZE L 1000 MM COD. PWC300021
- 2 GEDÄMMTE PLENUMS FÜR LINEAREN LUFTDURCHLASS 2 SCHLITZE L 1000 MM COD. PWD400329
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 4 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500009	RAPID COMPLETION KIT FOR PROAIR PACK 2 ZONES WITH CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

3 ZONE B

THE KIT CONSISTS OF:

- 3 LINEAR DIFFUSERS WITH DAMPER, 2 SLOTS IN WHITE PAINTED ALUMINIUM L 1000 MM COD. PWC300021
- 3 INSULATED UNIVERSAL PLENUMS FOR LINEAR DIFFUSER 2 SLOTS L 1000 MM COD. PWD400329
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 6 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 3 DIFFUSEURS LINÉAIRES AVEC REGISTRE, 2 FENTES EN ALUMINIUM PEINT BLANC L 1000 MM CODE PWC300021
- 3 PLÉNUMS UNIVERSELS ISOLÉS POUR DIFFUSEUR LINÉAIRE 2 FENTES L 1000 MM CODE PWD400329
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 6 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 3 LINEARE LUFTDURCHLÄSSE MIT KLAPPE, 2 WEISS LACKIERTE ALUMINIUMSCHLITZE L 1000 MM COD. PWC300021
- 3 GEDÄMMTE PLENUMS FÜR LINEAREN LUFTDURCHLASS 2 SCHLITZE L 1000 MM COD. PWD400329
- 1X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 6 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500010	RAPID COMPLETION KIT FOR PROAIR PACK 3 ZONES WITH CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

4 ZONE C

THE KIT CONSISTS OF:

- 4 LINEAR DIFFUSERS WITH DAMPER, 2 SLOTS IN WHITE PAINTED ALUMINIUM L 1000 MM COD. PWC300021
- 4 INSULATED UNIVERSAL PLENUMS FOR LINEAR DIFFUSER 2 SLOTS L 1000 MM COD. PWD400329
- 1 DOUBLE-WALL ALUMINIUM FLEXIBLE HOSE Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 600 X 400 MM, EXTERNAL MEASUREMENT 632 X 432 MM COD. WB11161525
- 8 HOSE CLAMPS

LE KIT SE COMPOSE DE:

- 4 DIFFUSEURS LINÉAIRES AVEC REGISTRE, 2 FENTES EN ALUMINIUM PEINT BLANC L 1000 MM CODE PWC300021
- 4 PLÉNUMS UNIVERSELS ISOLÉS POUR DIFFUSEUR LINÉAIRE 2 FENTES L 1000 MM CODE PWD400329
- 1 TUYAU FLEXIBLE EN ALUMINIUM DOUBLE PAROI Ø 152 MM DE 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 600 X 400 MM, TAILLE EXTÉRIEURE 632 X 432 MM CODE WB11161525
- 8 COLLIERS DE SERRAGE


DER BAUSATZ BESTEHT AUS:

- 4 LINEARE LUFTDURCHLÄSSE MIT KLAPPE, 2 WEISS LACKIERTE ALUMINIUMSCHLITZE L 1000 MM COD. PWC300021
- 4 GEDÄMMTE PLENUMS FÜR LINEAREN LUFTDURCHLASS 2 SCHLITZE L 1000 MM COD. PWD400329
- 1 X 10 M Ø 152 MM ALUMINIUM-DOPPELWANDSCHLAUCH CSB. 11152152
- 1 ANSAUGGITTER AUS ALUMINIUM WEISS LACKIERT MIT FILTER, EINBAUÖFFNUNG 600 X 400 AUSSENMASS 632 X 432 COD. WB11161525
- 8 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500011	RAPID COMPLETION KIT FOR PROAIR PACK 4 ZONES WITH CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

A

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

2 ZONE Ø150

B

Datasheet






INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

3 ZONE Ø150

C

Datasheet





INTAKE GRILLE WITH FILTER
installation hole 600 x 400 mm

4 ZONE Ø150

5 ZONE A

FOR PROAIR PACK
WITH Ø 150 CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

THE KIT CONSISTS OF:

- 5 LINEAR DIFFUSERS WITH DAMPER, 2 SLOTS IN WHITE PAINTED ALUMINIUM L 1000 MM COD. PWC300021
- 5 INSULATED UNIVERSAL PLENUMS FOR LINEAR DIFFUSER 2 SLOTS L 1000 MM COD. PWD400329
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 10 HOSE CLAMPS

POUR COMPLÉTE PROAIR PACK
AVEC FIXATIONS Ø 150 ET DIFFUSEURS LINÉAIRES L=1000 MM 2 FENTES

LE KIT SE COMPOSE DE:

- 5 DIFFUSEURS LINÉAIRES AVEC REGISTRE, 2 FENTES EN ALUMINIUM PEINT BLANC L 1000
- 5 PLÉNUMS UNIVERSELS ISOLÉS POUR DIFFUSEUR LINÉAIRE 2 FENTES L 1000 MM CODE PWD400329
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 10 COLLIERS DE SERRAGE

ALS ERGÄNZUNG FÜR
MIT ANSCHLÜSSEN Ø 150 UND LINEAREN DIFFUSOREN 1000 MM 2 SCHLITZEN

DER BAUSATZ BESTEHT AUS:

- 5 LINEARE LUFTDURCHLÄSSE MIT KLAPPE, 2 SCHLITZE IN WEISS LACKIERTEM ALUMINIUM L 1000 MM COD PWC300021
- 5 GEDÄMMTE UNIVERSAL-PLENUMS FÜR LINEARE LUFTDURCHLÄSSE 2 SCHLITZE L 1000 MM COD. PWD400329
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 10 ROHRSCHELLEN

CODE	DESCRIPTION
GAC500012	RAPID COMPLETION KIT FOR PROAIR PACK 5 ZONES WITH CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

6 ZONE B

THE KIT CONSISTS OF:

- 6 LINEAR DIFFUSERS WITH DAMPER, 2 SLOTS IN WHITE PAINTED ALUMINIUM L 1000 MM COD. PWC300021
- 6 INSULATED UNIVERSAL PLENUMS FOR LINEAR DIFFUSER 2 SLOTS L 1000 MM COD. PWD400329
- 2 DOUBLE-WALL ALUMINIUM FLEXIBLE PIPES Ø 152 MM 10 M COD. 11152152
- 1 WHITE ALUMINIUM INTAKE GRILLE WITH FILTER INSTALLATION HOLE 1000 X 500 MM, EXTERNAL MEASUREMENT 1032 X 532 MM COD. WB11161556
- 12 HOSE CLAMPS


LE KIT SE COMPOSE DE:


- 6 DIFFUSEURS LINÉAIRES AVEC REGISTRE, 2 FENTES EN ALUMINIUM PEINT BLANC L 1000
- 6 PLÉNUMS UNIVERSELS ISOLÉS POUR DIFFUSEUR LINÉAIRE 2 FENTES L 1000 MM CODE PWD400329
- 2 TUYAUX FLEXIBLES DOUBLE PAROI EN ALUMINIUM Ø 152 MM 10 M CODE 11152152
- 1 GRILLE DE RÉCUPÉRATION EN ALUMINIUM BLANC AVEC FILTRE À TROU D'INSTALLATION 1000 X 500 MM, TAILLE EXTÉRIEURE 1032 X 532 MM CODE WB11161556
- 12 COLLIERS DE SERRAGE

DER BAUSATZ BESTEHT AUS:

- 6 LINEARE LUFTDURCHLÄSSE MIT KLAPPE, 2 SCHLITZE IN WEISS LACKIERTEM ALUMINIUM L 1000 MM COD PWC300021
- 6 GEDÄMMTE UNIVERSAL-PLENUMS FÜR LINEARE LUFTDURCHLÄSSE 2 SCHLITZE L 1000 MM COD. PWD400329
- 2 SCHLÄUCHE DOPPELWANDIG, AUS ALUMINIUM Ø 152 MM 10 M COD. 11152152
- 1 ANSAUGGITTER AUS WEISSEM ALUMINIUM MIT FILTER, EINBAUÖFFNUNG 600 X 400 MM, AUSSENMASSE 632 X 432 MM COD. WB11161556
- 12 ROHRSCHELLEN


CODE	DESCRIPTION
GAC500013	RAPID COMPLETION KIT FOR PROAIR PACK 6 ZONES WITH CONNECTIONS AND LINEAR DIFFUSERS L=1000 MM 2 SLOTS

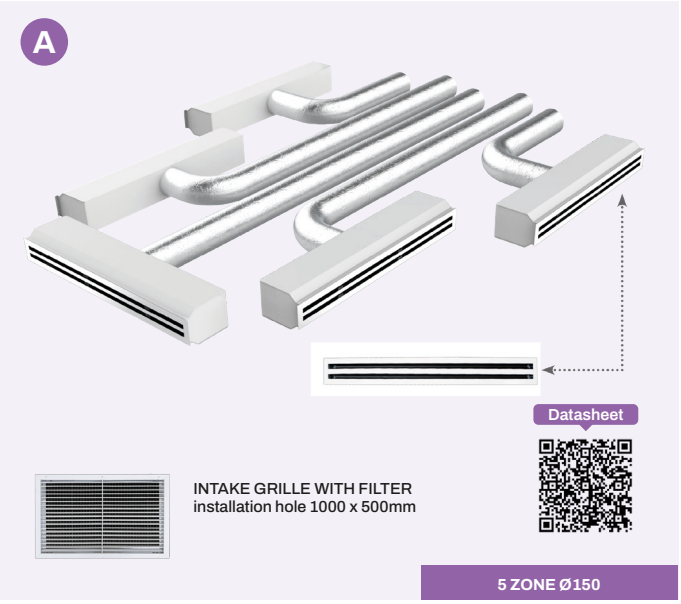

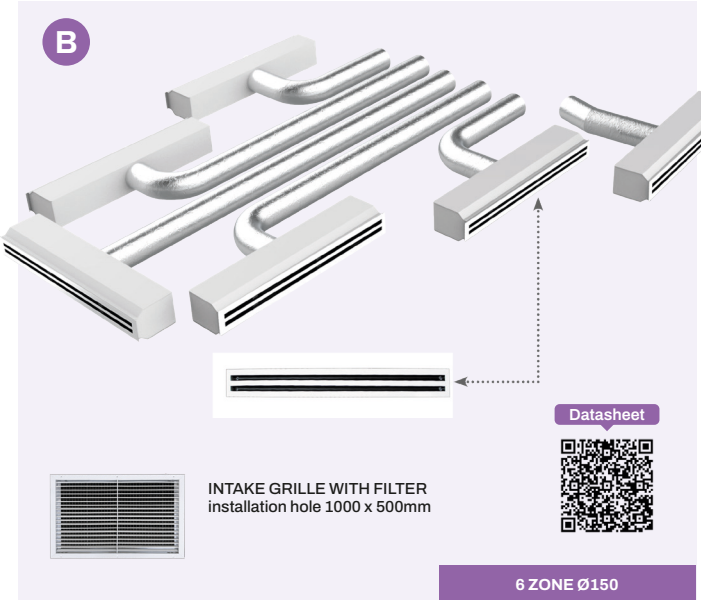


ATTENTION! Plenum for linear diffuser of kit rapid is designed with specific measures and ready with with pre-cut holes ø150 (back, side, upper coupler).


BACK COUPLER




SIDE COUPLER



UPPER COUPLER

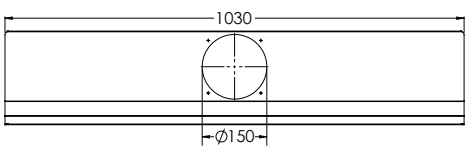

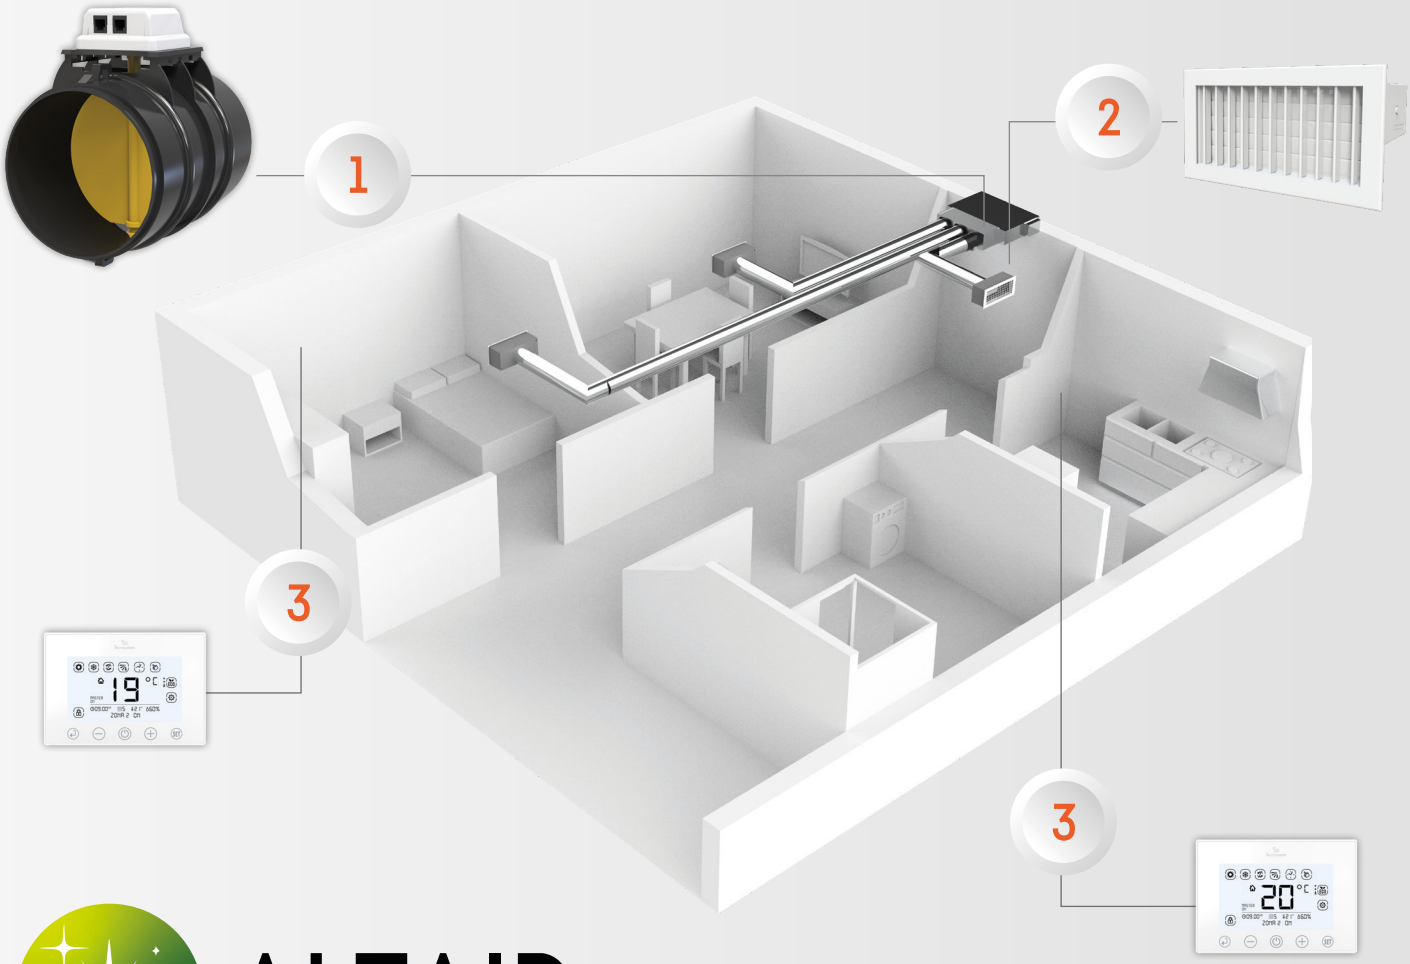

ALTAIR point

TIMELY TEMPERATURE CONTROL WITH MOTORIZED DAMPER OR NOZZLE

The ALTAIR POINT systems allow controlling the temperature in the room without any interaction with the ducted machine or the by-pass system: this is a point-to-point system, which connects a chrono-thermostat to one or more motorized dampers or nozzles (up to 10). This solution, that can be implemented in a classic ducted system, allows the customer to control part of these areas by means of an automation.

The installation of a built-in chrono-thermostat from the ALTAIR POINT STEALTH 3X series and of a motorized damper or nozzle in each of the affected areas will meet the needs of the customer.

GESTION PONCTUELLE DE LA TEMPÉRATURE AVEC REGISTRE OU GRILLE MOTORISÉ

Le système ALTAIR POINT permet de contrôler la température ambiante sans interagir ni avec la machine canalisée ni avec le by-pass : c'est un système point à point, c'est-à-dire directement entre un thermostat programmable et une ou plusieurs fermetures ou grilles motorisées (max 10). Cette solution, applicable à un système canalisé classique, offre au client la possibilité de contrôler une partie de ces zones au moyen d'une automatisation.


L'installation d'un thermostat programmable de la série ALTAIR POINT STEALTH 3X encastré et d'une fermeture ou grille motorisée dans chacune des zones concernées satisfera la demande du client.

ZEITNAHEN STEUERUNG DER TEMPERATUR MIT MOTORISIERTER KLAPPE

Das ALTAIR POINT-System ermöglicht die Regelung der Raumtemperatur ohne Interaktion mit dem kanalisierten Gerät oder dem Bypass: Es ist ein Punkt-zu-Punkt-System, d. h. direkt zwischen einem Chrono-Thermostat und einem oder mehreren motorisierten Schiebern oder Lüftungsöffnungen (max 10). Diese Lösung, die auf ein klassisches Kanalsystem anwendbar ist, bietet dem Kunden die Möglichkeit, einen Teil dieser Bereiche mittels einer Automatisierung zu steuern.

Die Installation eines eingebauten Chrono-Thermostats der Serie ALTAIR POINT STEALTH 3X und eines motorisierten Schiebers oder Entlüftung in jedem der betroffenen Bereiche wird dem Wunsch des Kunden gerecht.

Installation example



1 ALTAIR POINT motorised circular damper kit



1 ALTAIR POINT motorised delivery nozzle kit



2 STEALTH 3X Altair point

STEALTH 3X FOR ALTAIR POINT

CE MADE IN ITALY

BUILT-IN PROGRAMMABLE THERMOSTAT WITH TOUCH
wired

TECHNICAL SPECIFICATIONS

- DIMENSIONS W 138 X H 95 X D 40 MM
- PROTRUSION FROM FLUSH WALL 15 MM
- BUILT-IN MOUNTED ON E503 TYPE BOXES BY MEANS OF ADAPTER, SCREWS AND FIXING PLUGS SUPPLIED
- POWER SUPPLY AND DATA TRANSMISSION: 8-PIN RJ45 TYPE
- POWER SUPPLY 12 V DC
- TOUCH KEYPAD - 4.5” LCD DISPLAY
- TIMED OR MANUAL FEATURES
- ADJUSTMENT OF THE DAMPER OR MOTORISED NOZZLE IN AUTOMATIC OR MANUAL MODE
- TIMED THERMOSTAT LOCK
- TEMPERATURE SCALE °C / °F
- RH VALUE IN %
- AT AND SET POINT VALUE
- CLOCK (AM - PM / 24H)
- WEEKDAY

CHRONOTHERMOSTAT ENCASTRÉ FILAIRE TACTILE
filaire

CARACTÉRISTIQUES TECHNIQUES

- DIMENSIONS L 138 X H 95 X P 40 MM
- PROTUBÉRANCE À PARTIR DU BORD DU MUR 15 MM
- FIXATION ENCASTRÉE SUR LES BOÎTES DE TYPE E503 AU MOYEN D'UN ADAPTATEUR, DE VIS ET DE CHEVILLES FOURNIES
- ALIMENTATION ET TRANSMISSION DE DONNÉES : TYPE RJ45 8 PÔLES
- ALIMENTATION 12 VCC
- CLAVIER TACTILE - ÉCRAN LCD 4,5"
- FONCTIONS CHRONOLOGIQUES OU MANUELLES
- RÉGLAGE DU REGISTRE OU DE LA BUSE MOTORISÉE EN MODE AUTOMATIQUE OU MANUEL
- BLOC CHRONOTHERMOSTAT
- ÉCHELLE DE TEMPÉRATURE °C / °F
- INDICATION DE LA VALEUR HR EN %
- VALEUR DE TA ET POINT DE CONSIGNE
- HORLOGE (AM - PM / 24H)
- JOUR DE LA SEMAINE

EINBAU-CHRONO-THERMOSTAT MIT TOUCHDISPLAY
verkabelt

TECHNISCHE EIGENSCHAFTEN

- ABMESSUNGEN B 138 X H 95 X T 40 MM
- ÜBERSTAND VON DER WANDKANTE 15 MM
- UNTERPUTZMONTAGE AN SCHALTSCHRÄNKEN TYP E503 MITTELS ADAPTER, SCHRAUBEN UND DÜBEL IM LIEFERUMFANG ENTHALTEN
- VERSORGUNG UND DATENÜBERTRAGUNG: RJ45, 8-POLIG
- STROMVERSORGUNG 12 VDC
- TOUCH-TASTATUR - 4,5-ZOLL-LCD-DISPLAY
- CHRONOLOGISCHE ODER MANUELLE FUNKTIONEN
- AUTOMATISCHE ODER MANUELLE VERSTELLUNG VON KLAPPE ODER DER MOTORISIERTEN LUFTGITTER
- SPERRE DES CHRONO-THERMOSTATS
- TEMPERATURSKALA °C / °F
- ANGABE DES UR-WERTES IN %
- TA- UND SOLLWERT
- UHR (AM - PM / 24H)
- WOCHENTAG

THE BUILT-IN POWER SUPPLY IS AVAILABLE ON REQUEST

L'ALIMENTATION INTÉGRÉE E ST DISPONIBLE SUR DEMANDE

UNTERPUTZ-NETZTEIL AUF ANFRAGE ERHÄLTLICH

WATCH THE VIDEO

YouTube





Datasheet

CODE	DESCRIPTION
11181454	BUILT-IN WIRED PROGRAMMABLE THERMOSTAT WITH TOUCH STEALTH 2X FOR ALTAIR POINT

ALTAIR POINT

MADE IN ITALY

MOTORISED CIRCULAR DAMPER KIT

THE MOTORISED CIRCULAR DAMPER IS POWERED DIRECTLY BY THE CABLE-PROGRAMMABLE **THERMOSTAT AND CONTROLS THE BUTTERFLY ADJUSTMENT IN ONE OF THE 4 POSSIBLE POSITIONS: 0%, 33%, 66% AND 100%**, BOTH IN AUTOMATIC AND ON / OFF MANAGEMENT.

MADE OF PLASTIC MATERIAL, **IT GUARANTEES THERMAL INSULATION BETWEEN THE INNER AND OUTER SURFACE AVOIDING CONDENSATION PHENOMENA DURING SUMMER OPERATION**.

MADE OF ANTI-CONDENSATION ABS

KIT FERMETURE CIRCULAIRE MOTORISÉE

LA FERMETURE CIRCULAIRE MOTORISÉE EST ALIMENTÉ DIRECTEMENT PAR LE **THERMOSTAT PROGRAMMABLE PAR CÂBLE ET COMMANDE LE RÉGLAGE DU PAPILLON DANS L'UNE DES 4 POSITIONS POSSIBLES : 0%, 33%, 66% ET 100%**, À LA FOIS EN GESTION AUTOMATIQUE QUE ON/OFF.

FABRIQUÉE EN MATIÈRE PLASTIQUE, **ELLE GARANTIT UNE ISOLATION THERMIQUE ENTRE LA SURFACE INTÉRIEURE ET LA SURFACE EXTÉRIEURE EN ÉVITANT LES PHÉNOMÈNES DE CONDENSATION PENDANT LE FONCTIONNEMENT D'ÉTÉ**.

FABRIQUÉ EN ABS ANTI-CONDENSATION


MOTORISIERTER KREI-SDÄMPFERSATZ

DIE MOTORISIERTE KREISKLAPPE WIRD DIREKT VOM KABELPROGRAMMIERBAREN **THERMOSTAT ANGETRIEBEN UND STEUERT DIE DROSSELKLAPPENVERSTELLUNG IN EINER DER 4 MÖGLICHEN POSITIONEN: 0%, 33%, 66%** UND 100%, SOWOHL IM AUTOMATISCHEN ALS AUCH IM ON /OFF-VERWALTUNG.

ES BESTEHT AUS KUNSTSTOFF UND GEWÄHRLEISTET EINE THERMISCHE ISOLIERUNG ZWISCHEN INNEN- UND AUSSENFLÄCHE, **WODURCH KONDENSATIONSERSCHEINUNGEN IM SOMMERBETRIEB VERMIEDEN WERDEN**.

AUS ANTIKONDENSATIONS-ABS

ALTAIR point

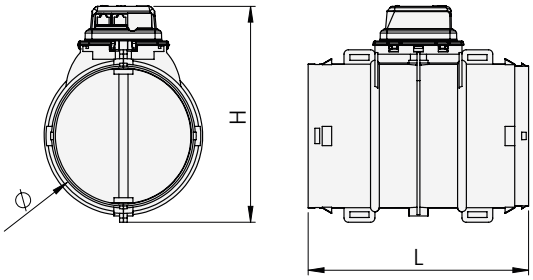



ATTENTION!

- **The dampers of the "ALTAIR POINT SYSTEM" only work with built-in "STEALTH 3X" cab touch screen programmable thermostats for altair point. (see. Pag. 91)**
- **Use always the 8-wire telephone cable with plug RJ45 6 mt supplied in the kit. Regarding connection cable refert to page 21 of the catalogue galaxy. Do not use any lan cables.**

FOR FIXING COLLAR SEE PAGE 17

CODE	Ø COUPLING A [mm]	H	LENGHT [mm]	MAX AIR FLOW [m³/h]
11181551	100	230	315	152
11181556	150	230	230	388
11181561	200	280	250	678
11181566	250	330	280	1060
11181571	300	380	350	1526

Datasheet

ALTAIR POINT

CE MADE IN ITALY

WHITE MOTORISED DELIVERY NOZZLE KIT
including gasket

THE MOTORISED CIRCULAR DAMPER IS POWERED DIRECTLY BY THE CABLE-PROGRAMMABLE **THERMOSTAT AND CONTROLS THE BUTTERFLY ADJUSTMENT IN ONE OF THE 4 POSSIBLE POSITIONS: 0%, 33%, 66% AND 100%**, BOTH IN AUTOMATIC AND ON / OFF MANAGEMENT.

MADE OF PLASTIC MATERIAL, **IT GUARANTEES THERMAL INSULATION BETWEEN THE INNER AND OUTER SURFACE AVOIDING CONDENSATION PHENOMENA DURING SUMMER OPERATION.**

KIT GRILLE DE DISTRIBUTION MOTORISÉE BLANCHE
avec joint

LA FERMETURE CIRCULAIRE MOTORISÉE EST ALIMENTÉ DIRECTEMENT PAR LE **THERMOSTAT PROGRAMMABLE PAR CÂBLE ET COMMANDE LE RÉGLAGE DU PAPILLON DANS L'UNE DES 4 POSITIONS POSSIBLES : 0%, 33%, 66% ET 100%**, À LA FOIS EN GESTION AUTOMATIQUE QUE ON/OFF.


FABRIQUÉE EN MATIÈRE PLASTIQUE, **ELLE GARANTIT UNE ISOLATION THERMIQUE ENTRE LA SURFACE INTÉRIEURE ET LA SURFACE EXTÉRIEURE EN ÉVITANT LES PHÉNOMÈNES DE CONDENSATION PENDANT LE FONCTIONNEMENT D'ÉTÉ.**

WEISSES MOTORISIERTES ABGABEDÜSENSET
mit Dichtung

DIE MOTORISIERTE KREISKLAPPE WIRD DIREKT VOM KABELPROGRAMMIERBAREN **THERMOSTAT ANGETRIEBEN UND STEUERT DIE DROSSELKLAPPENVERSTELLUNG IN EINER DER 4 MÖGLICHEN POSITIONEN: 0%, 33%, 66%** UND 100%, SOWOHL IM AUTOMATISCHEN ALS AUCH IM ON /OFF-VERWALTUNG.

ES BESTEHT AUS KUNSTSTOFF UND GEWÄHRLEISTET EINE THERMISCHE ISOLIERUNG ZWISCHEN INNEN- UND AUSSENFLÄCHE, **WODURCH KONDENSATIONSERSCHEINUNGEN IM SOMMERBETRIEB VERMIEDEN WERDEN.**

ALTAIR point

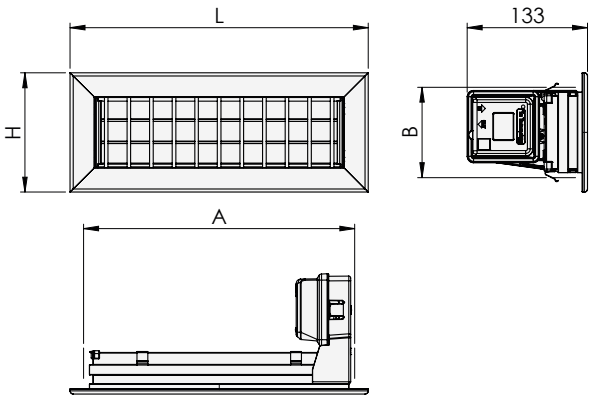




ATTENTION!


- **The dampers of the "ALTAIR POINT SYSTEM" only work with built-in "STEALTH 3X" cab touch screen programmable thermostats for altair point. (see. Pag. 91)**
- **Use always the 8-wire telephone cable with plug RJ45 6 mt supplied in the kit. Regarding connection cable refert to page 21 of the catalogue galaxy. Do not use any lan cables.**

FOR FIXING COLLAR SEE PAGE 17

CODE	A	B	L	H	MAX AIR FLOW	SPEED
	[mm]	[mm]	[mm]	[mm]	[m³/h]	[m/s]
11181683	300	100	332	132	400	6,9
11181685	300	150	332	182	500	5,8
11181687	300	200	332	232	900	6,2
11181689	400	100	432	132	500	5,8
11181691	400	150	432	182	900	6,2
11181693	400	200	432	232	1200	6,8
11181695	500	100	532	132	700	6,2
11181697	500	150	532	182	1200	6,8

Datasheet




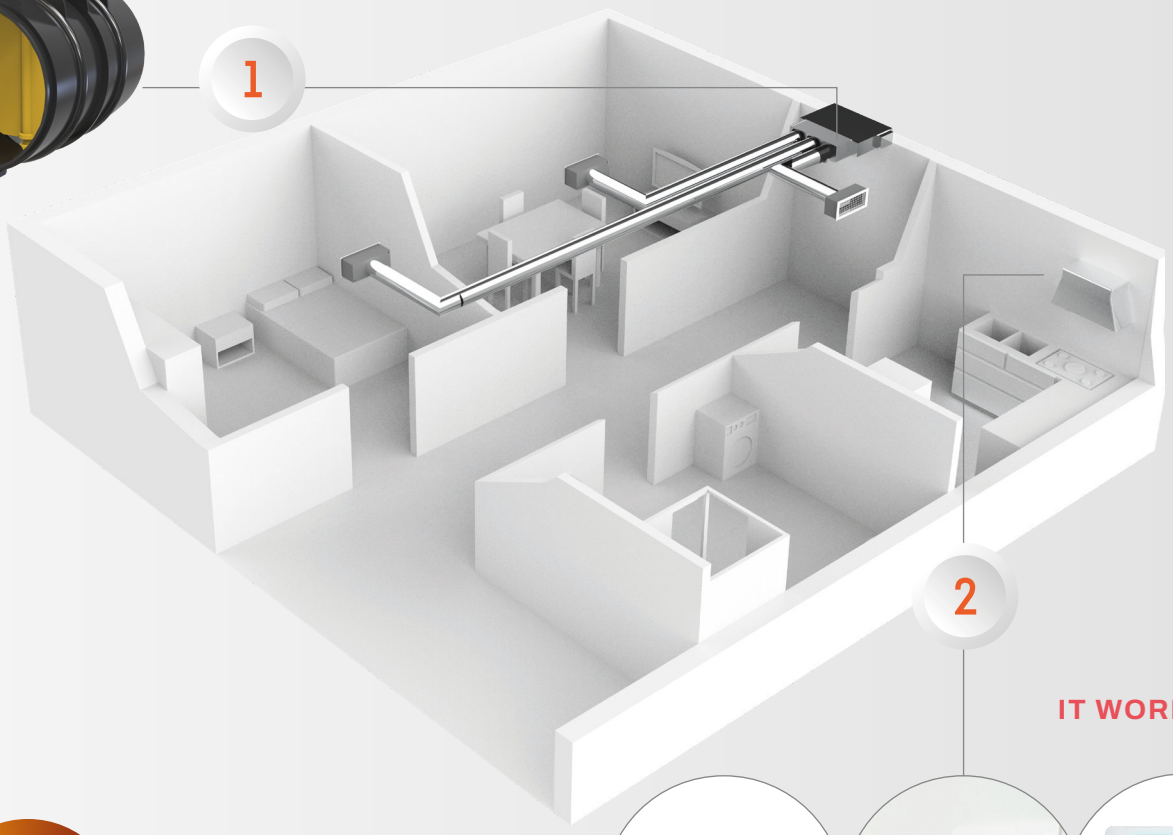

SIRIO 2.0 point

IT WORKS WITH:

HOME AUTOMATION SYSTEMS





(SEE SHOWGAS CATALOG PAGE 25)

MOTORISED BUTTERFLY DAMPER FOR POINT SYSTEM

THE SIRIO 2.0 POINT SYSTEM ALLOWS THE MANAGEMENT OF THE TEMPERATURE OR AIR FLOW FOR EACH ROOM, WITHOUT THE AID OF ANY CONTROL UNIT OR A PARTICULAR COMMAND.
THE MOTORISED CIRCULAR DAMPER INTEGRATES PERFECTLY WITH NEW AND EXISTING DUCTED SYSTEMS IN WHICH IT IS NECESSARY TO MANAGE ONLY PART OF THE DUCTED SYSTEM: THIS SOLUTION DOES NOT REQUIRE THE INSTALLATION OF ANY SYSTEM THAT MANAGES THE SWITCHING ON/OFF OF THE INTERNAL UNIT OR THE MOVEMENT OF THE MOTORISED BYPASS. IT THEREFORE ALLOWS MANAGEMENT OF THE AIR FLOW IN THE INDIVIDUAL ROOMS WITHOUT THE AID OF AN ELECTRONIC CONTROL UNIT FOR OPERATION. IT IS EQUIPPED WITH AUXILIARY ON/OFF INPUT AND OUTPUT CONTACTS. IT CAN BE CONTROLLED BY THERMOSTATS, ON/OFF SWITCHES OR INTEGRATION WITH HOME AUTOMATION SYSTEM BY MEANS OF CLEAN CONTACT.


FERMETURE CIRCULAIRE MOTORISÉE À PAPILLON POUR SYSTÈME PONCTUEL

LE SYSTÈME SIRIO 2.0 POINT PERMET LA GESTION DE LA TEMPÉRATURE OU DU DÉBIT D'AIR PAR PIÈCE, SANS L'AIDE D'UNE UNITÉ DE COMMANDE OU D'UNE COMMANDE PARTICULIÈRE.
LA FERMETURE CIRCULAIRE MOTORISÉE S'INTÈGRE PARFAITEMENT AUX SYSTÈMES DE GOULOTTES NEUFS ET EXISTANTS DANS LESQUELS ON NE SOUHAITE GÉRER QU'UNE PARTIE DU SYSTÈME DE GOULOTTES : CETTE SOLUTION NE NÉCESSITE L'INSTALLATION D'AUCUN SYSTÈME QUI GÈRE LA MISE EN MARCHE/ARRÊT DE L'UNITÉ INTÉRIEURE OU LE MOUVEMENT DE LA DÉRIVATION MOTORISÉE. PERMET AINSI LA GESTION DU FLUX D'AIR DANS CHAQUE PIÈCE SANS L'AIDE D'UNE UNITÉ ÉLECTRONIQUE DE COMMANDE POUR LE FONCTIONNEMENT. IL EST DOTÉ DE CONTACTS AUXILIAIRES DE TYPE ON/OFF EN ENTRÉE ET SORTIE. PEUT ÊTRE COMMANDÉ PAR DES THERMOSTATS, DES INTERRUPTEURS MARCHE/ARRÊT OU L'INTÉGRATION AVEC LE SYSTÈME DOMOTIQUE AU MOYEN D'UN CONTACT PROPRE.

MOTORISIERTE KREISKLAPPE FÜR POINT SYSTEM

DAS SYSTEM SIRIO 2.0 POINT ERMÖGLICHT DIE STEUERUNG DER TEMPERATUR ODER DES LUFTSTROMS PRO RAUM, OHNE DIE HILFE EINES STEUERGERÄTS ODER EINES BESTIMMTEN BEFEHLS.
DER MOTORISIERTE KREISKLAPPEN LÄSST SICH PERFEKT IN NEUE UND BESTEHENDE LEITUNGSSYSTEME INTEGRIEREN, IN DENEN SIE NUR EINEN TEIL DES LEITUNGSSYSTEMS VERWALTEN MÖCHTEN: DIESE LÖSUNG ERFORDERT KEINE INSTALLATION EINES SYSTEMS, WELCHES DAS EIN- / AUSSCHALTEN DES INNENGERÄTS ODER DIE BEWEGUNG DES MOTORISIERTEN BYPASSES VERWALTET. SIE ERMÖGLICHT SOMIT DIE STEUERUNG DES LUFTSTROMS IN DEN EINZELNEN RÄUMEN OHNE ZUHILFENAHME EINER ELEKTRONISCHEN STEUEREINHEIT FÜR DEN BETRIEB. ES IST MIT EIN / AUS-HILFSKONTAKTEN IM EIN- UND AUSGANG AUSGESTATTET. ES KANN DURCH THERMOSTATE, EIN-/AUSSCHALTER ODER DIE INTEGRATION MIT DEM HAUSAUTOMATIONSSYSTEM DURCH SAUBEREN KONTAKT GESTEUERT WERDEN.

Installation example



1 Sirio 2.0 Point motorised circular damper kit



1 on / off switch*

SIRIO 2.0 POINT

CE MADE IN ITALY

MOTORISED BUTTERFLY CIRCULAR DAMPER IN PLASTIC MATERIAL

TECHNICAL SPECIFICATIONS

- ANTI-CONDENSATION ABS PLASTIC
- AUXILIARY IN/OUT CONTACT
- POWER SUPPLY: 220V
- POWER SUPPLY INCLUDED (“MASTER” VERSION)
- “SLAVE” VERSION WITHOUT POWER SUPPLY
- OPENING BUTTERFLY ON / OFF
- REMOVABLE, ROTATABLE MOTOR FOR EASY MAINTENANCE
- OPERATING TEMPERATURE 0°C A +70°C
- MAX CONVEYANCE LENGTH 25 M
- A MAXIMUM OF 8 DAMPERS CAN BE INSTALLED IN DUCTING
- SIRIO 2.0 PACK SYSTEM INSTALLED ON PLENUM AVAILABLE ON REQUEST

FERMETURE CIRCULAIRE MOTORISÉE À PAPILLON EN PLASTIQUE

CARACTÉRISTIQUES TECHNIQUES


- PLASTIQUE ABS ANTI-CONDENSATION
- CONTACT AUXILIAIRE ENTRÉE/SORTIE
- ALIMENTATION: 220 V
- BLOC D’ALIMENTATION INCLUS (VERSION « MASTER »)
- VERSION « ESCLAVE » SANS ALIMENTATION ÉLECTRIQUE
- OUVERTURE PAPILLON ON / OFF
- MOTEUR AMOVIBLE ET ROTATIF POUR UN ENTRETIEN FACILE
- TEMPÉRATURE DE FONCTIONNEMENT 0°C A +70°C
- LONGUEUR MAXIMALE DE LA CATÉNAIRE 25 M
- 8 REGISTRES MAXIMUM PEUVENT ÊTRE INSTALLÉS DANS LA CATÉNAIRE
- SYSTÈME SIRIO 2.0 PACK INSTALLÉ SUR PLÉNUM DISPONIBLE SUR DEMANDE

MOTORISIERTE KREISKLAPPE KUNST-STOFF

TECHNISCHE EIGENSCHAFTEN

- ANTIKONDENSATIONS-ABS-KUNSTSTOFF
- ZUSÄTZLICHER IN/OUT-KONTAKT
- VERSORGUNG: 220 V
- NETZTEIL IM LIEFERUMFANG ENTHALTEN (VERSION "MASTER")
- SLAVE-VERSION OHNE NETZTEIL
- ÖFFNUNGSKLAPPE EIN / AUS
- ABNEHMBARER UND DREHBARER MOTOR FÜR EINFACHE WARTUNG
- BETRIEBSTEMPERATUR 0°C BIS +70°C
- MAX. KETTENLINIENLÄNGE 25 M
- ES KÖNNEN MAXIMAL 8 KLAPPEN IN DER KETTENLINIE INSTALLIERT WERDEN
- AUF ANFRAGE IST DAS SIRIO 2.0 PACK SYSTEM AUF DEM PLENUM INSTALLIERT VERFÜGBAR

EXAMPLE OF INSTALLATION WITH 2 DAMPERS




EXAMPLE OF INSTALLATION WITH 4 DAMPERS





BUILT-IN POWER SUPPLY

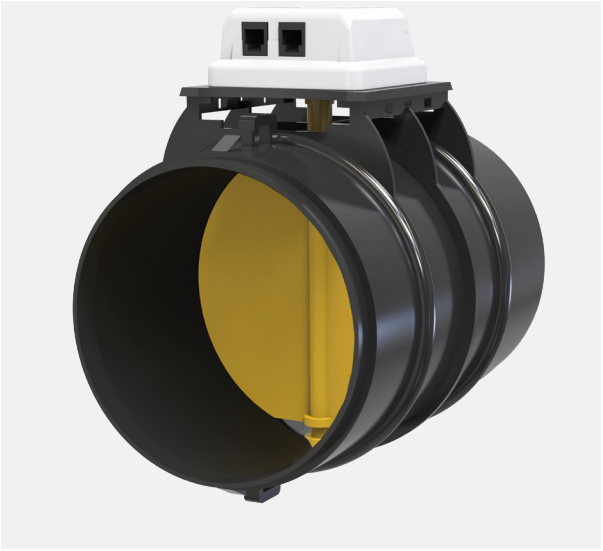



YouTube

VIDEO


Datasheet

ATTENTION! Always provide the inspection hatch to access the dampers.
For cable connections between "master" e "slave" dampers see pag. 21







CONNECTION WIRING DIAGRAM

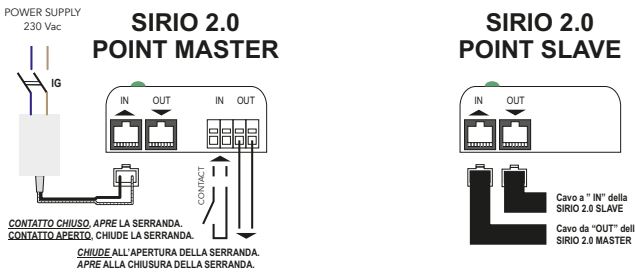

CODE	DESCRIPTION	DIMENSIONS			MAX AIR FLOW
		H [mm]	L [mm]	Ø [mm]	[m³/h]
GAD300001	SIRIO 2.0 POINT MOTORISED BUTTERFLY DAMPER IN PLASTIC MATERIAL WITH POWER SUPPLY - Ø100 MASTER	230	315	100	152
GAD300002	SIRIO 2.0 POINT MOTORISED BUTTERFLY DAMPER IN PLASTIC MATERIAL WITH POWER SUPPLY - Ø150 MASTER	230	230	150	388
GAD300003	SIRIO 2.0 POINT MOTORISED BUTTERFLY DAMPER IN PLASTIC MATERIAL WITH POWER SUPPLY - Ø200 MASTER	280	250	200	678
GAD300004	SIRIO 2.0 POINT MOTORISED BUTTERFLY DAMPER IN PLASTIC MATERIAL WITH POWER SUPPLY - Ø250 MASTER	330	280	250	1060
GAD300005	SIRIO 2.0 POINT MOTORISED BUTTERFLY DAMPER IN PLASTIC MATERIAL WITH POWER SUPPLY - Ø300 MASTER	380	350	300	1526
GAD300007	SIRIO 2.0" MOTORISED BUTTERFLY DAMPER - Ø100 - SLAVE	230	315	100	152
GAD300008	SIRIO 2.0" MOTORISED BUTTERFLY DAMPER - Ø150 - SLAVE	230	230	150	388
GAD300009	SIRIO 2.0" MOTORISED BUTTERFLY DAMPER - Ø200 - SLAVE	280	250	200	678
GAD300010	SIRIO 2.0" MOTORISED BUTTERFLY DAMPER - Ø250 - SLAVE	330	280	250	1060
GAD300011	SIRIO 2.0" MOTORISED BUTTERFLY DAMPER - Ø300 - SLAVE	380	350	300	1526




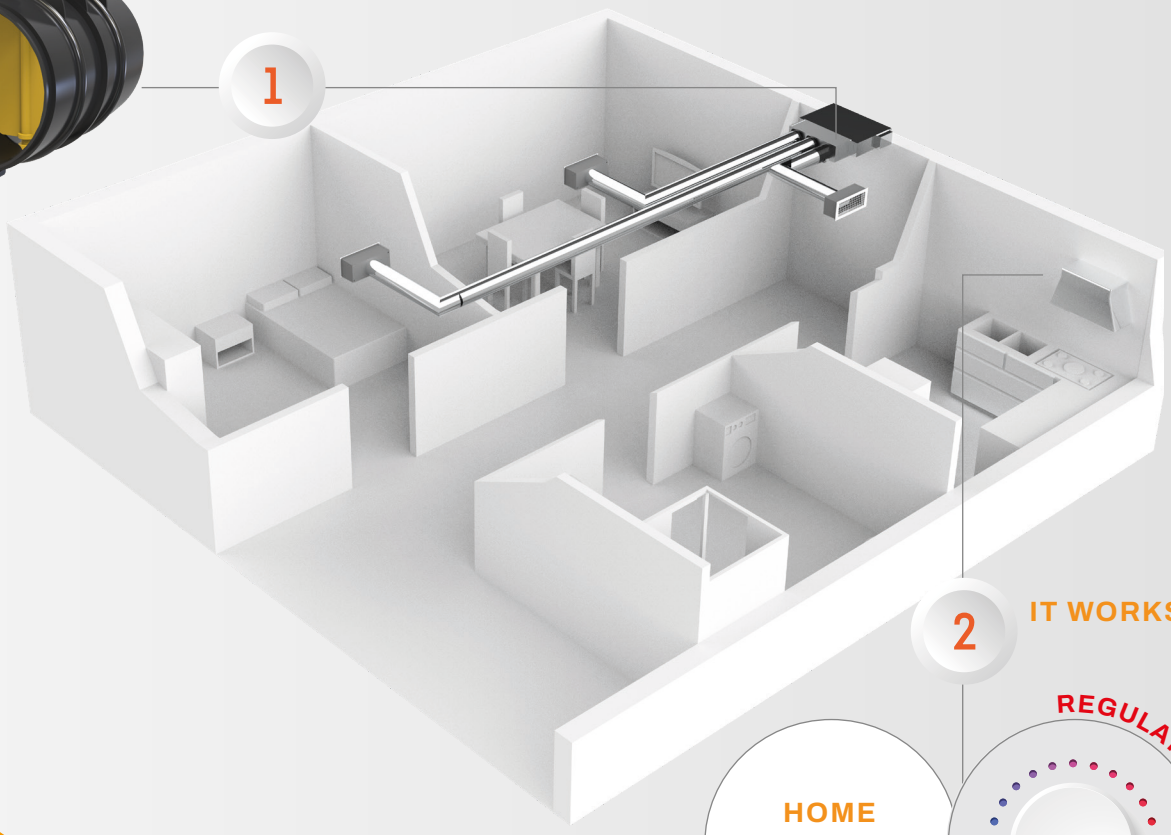

2 IT WORKS WITH

HOME AUTOMATION SYSTEMS

REGULATOR 0.10V



SIRIO 0.10V

MOTORISED BUTTERFLY DAMPER FOR POINT SYSTEM

THE SIRIO 0.10V POINT DAMPER ALLOWS THE MANAGEMENT OF THE TEMPERATURE OR AIR FLOW IN EACH INDIVIDUAL ROOM, WITHOUT THE AID OF ANY CONTROL UNIT.
THE SIRIO 0.10V POINT MOTORISED CIRCULAR DAMPER INTEGRATES PERFECTLY WITH NEW AND EXISTING DUCTED SYSTEMS IN WHICH ONLY PART OF THE DUCTED SYSTEM IS TO BE MANAGED: THIS SOLUTION DOES NOT REQUIRE THE INSTALLATION OF ANY SYSTEM THAT MANAGES THE SWITCHING ON / OFF OF THE INDOOR UNIT OR THE MOVEMENT OF A MOTORISED BYPASS. IT ALLOWS THE MANAGEMENT OF THE AIR FLOW IN THE INDIVIDUAL ROOMS BY APPLYING A 0-10V REGULATOR (EASILY AVAILABLE ON THE MARKET) TO EACH SINGLE SIRIO 0.10V POINT DAMPER PRESENT IN THE SYSTEM: TO MANAGE THE SWITCHING ON AND OFF OF THE DUCTED UNITS, JUST USE THE ON/OFF OUTPUT AUXILIARY CONTACTS.


FERMETURE CIRCULAIRE MOTORISÉE À PAPILLON POUR SYSTÈME PONCTUEL

LA FERMETURE SIRIO 0.10V POINT PERMET LA GESTION DE LA TEMPÉRATURE OU DU DÉBIT D'AIR D'UNE SEULE PIÈCE, SANS L'AIDE D'AUCUNE CENTRALE DE COMMANDE.
LA FERMETURE CIRCULAIRE MOTORISÉE SIRIO 0.10V POINT S'INTÈGRE PARFAITEMENT DANS LES SYSTÈMES CANALISÉS NEUFS ET EXISTANTS DANS LESQUELS SEULE UNE PARTIE DU SYSTÈME CANALISÉ DOIT ÊTRE GÉRÉ : CETTE SOLUTION NE NÉCESSITE L'INSTALLATION D'AUCUN SYSTÈME GÉRANT L'ALLUMAGE/ EXTINCTION DE L'UNITÉ INTÉRIEURE OU LE MOUVEMENT D'UN BY-PASS MOTORISÉ.PERMET LA GESTION DU DÉBIT D'AIR DANS CHAQUE PIÈCE EN APPLIQUANT UN RÉGULATEUR 0-10V (FACILEMENT DISPONIBLE SUR LE MARCHÉ) ET APPLIQUÉ À CHAQUE FERMETURE INDIVIDUELLE SIRIO 0.10V POINT PRÉSENTE DANS LE SYSTÈME : S'IL EST ÉGALEMENT DESTINÉ À GÉRER L'ALLUMAGE ET L'ARRÊT DE L'UNITÉ CANALISÉE, IL SUFFIRA D'UTILISER LES CONTACTS AUXILIAIRES ON/OFF EN SORTIE.


MOTORISIERTE KREISKLAPPE FÜR POINT SYSTEM

DER SCHIEBER SIRIO 0.10V POINT ERMÖGLICHT DIE STEUERUNG DER TEMPERATUR ODER DES LUFTDURCHSATZES FÜR EINEN EINZELNEN RAUM OHNE DIE HILFE EINER STEUEREINHEIT.
DER MOTORISIERTE RUNDSCHIEBER SIRIO 0.10 V POINT LÄSST SICH PERFEKT IN NEUE UND BESTEHENDE KANALSYSTEME INTEGRIEREN, IN DENEN NUR EIN TEIL DES KANALSYSTEMS VERWALTET WERDEN SOLL: DIESE LÖSUNG ERFORDERT KEINE INSTALLATION EINES SYSTEMS, DAS DAS EIN- UND AUSSCHALTEN DES INNENGERÄTS VERWALTET ODER DIE BEWEGUNG EINES MOTORISIERTEN BYPASSES. ERMÖGLICHT DIE STEUERUNG DES LUFTSTROMS IN DEN EINZELNEN RÄUMEN DURCH ANLEGEN EINES REGLERS 0-10 V-(IM HANDEL ERHÄLTLICH) UND ANLEGEN AN JEDEN EINZELNEN IN DER ANLAGE VORHANDENEN SCHIEBER SIRIO 0.10V POINT: WENN ER AUCH ZUM EIN- UND AUSSCHALTEN DER GEMULTIPLEXTEN EINHEIT VORGESEHEN IST, IST ES AUSREICHEND, DIE EIN / AUS-HILFSKONTAKTE AM AUSGANG ZU VERWENDEN.

Installation example



1 Sirio 0.10V
motorised circular damper



1 Regulator 0.10V

SIRIO 0.10V POINT

MADE IN ITALY

MOTORISED CIRCULAR DAMPER IN PLASTIC MATERIAL

TECHNICAL SPECIFICATIONS

- ANTI-CONDENSATION ABS PLASTIC
- BUILT-IN POWER SUPPLY INCLUDED
- OUT CONTACT: ON/OFF (CLOSED, BUTTERFLY VALVE OPEN) (OPEN, BUTTERFLY VALVE CLOSED)
- INPUT: 0-10V (REGULATOR NOT SUPPLIED AND NOT LISTED IN THE CATALOGUE
- REMOVABLE, ROTATABLE MOTOR FOR EASY MAINTENANCE
- OPERATING TEMPERATURE 0°C A +70°C
- AVAILABLE IN 5Ø

ERMETURE CIRCULAIRE MOTORISÉE EN PLASTIQUE

CARACTÉRISTIQUES TECHNIQUES

- PLASTIQUE ABS ANTI-CONDENSATION
- BLOC D'ALIMENTATION INTÉGRÉ INCLUS
- CONTACT OUT : ON/OFF (FERMÉ, PAPILLON OUVERT) (OUVERT, PAPILLON FERMÉ)
- ENTRÉE : 0-10V (RÉGULATEUR NON FOURNI ET NON DISPONIBLE AU CATALOGUE
- MOTEUR AMOVIBLE ET ROTATIF POUR UN ENTRETIEN FACILE
- TEMPÉRATURE DE FONCTIONNEMENT 0°C A +70°C
- DISPONIBLE EN 5Ø


MOTORISIERTE KREISKLAPPE KUNSTSTOFF


TECHNISCHE EIGENSCHAFTEN

- ANTIKONDENSATIONS-ABS-KUNSTSTOFF
- INTEGRIERTES NETZTEIL IM LIEFERUMFANG ENTHALTEN
- OUT-KONTAKT: EIN / AUS (GESCHLOSSEN, DROSSELKLAPPE OFFEN) (OFFEN, DROSSELKLAPPE GESCHLOSSEN)
- EINGANG: 0-10V (REGLER NICHT IM LIEFERUMFANG ENTHALTEN UND NICHT IM KATALOG VERFÜGBAR)
- ABNEHMBARER UND DREHBARER MOTOR FÜR EINFACHE WARTUNG
- BETRIEBSTEMPERATUR 0°C BIS +70°C
- ERHÄLTLICH IN 5Ø




Alimentatore
Ad incasso

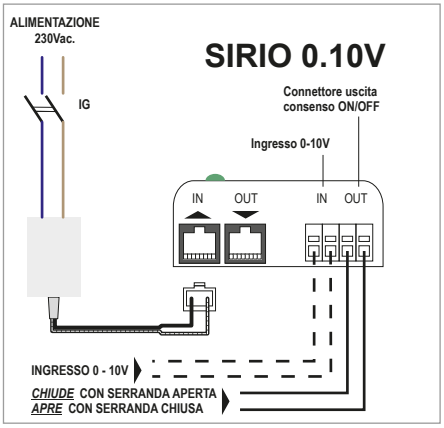

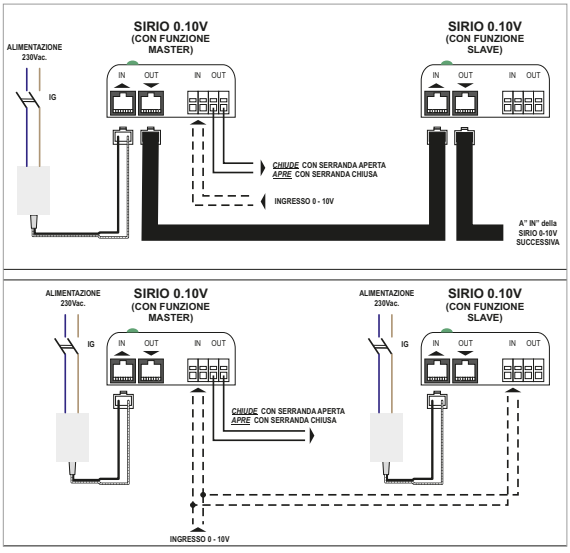




Per i collarini di fissaggio vedere pag. 17

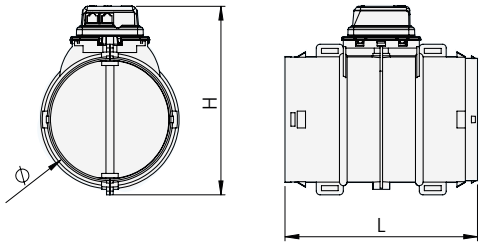


ATTENTION! Always provide the inspection hatch to access the damper

CODE	DESCRIPTION	DIMENSIONS			MAX AIR FLOW
		H [mm]	L [mm]	Ø [mm]	[m³/h]
GAD300014	MOTORISED CIRCULAR DAMPER SIRIO 0.10V - Ø100	230	315	100	152
GAD300015	MOTORISED CIRCULAR DAMPER SIRIO 0.10V - Ø150	230	230	150	388
GAD300016	MOTORISED CIRCULAR DAMPER SIRIO 0.10V - Ø200	280	250	200	678
GAD300017	MOTORISED CIRCULAR DAMPER SIRIO 0.10V - Ø250	330	280	250	1060
GAD300018	MOTORISED CIRCULAR DAMPER SIRIO 0.10V - Ø300	380	350	300	1526

Datasheet

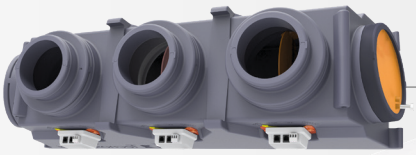

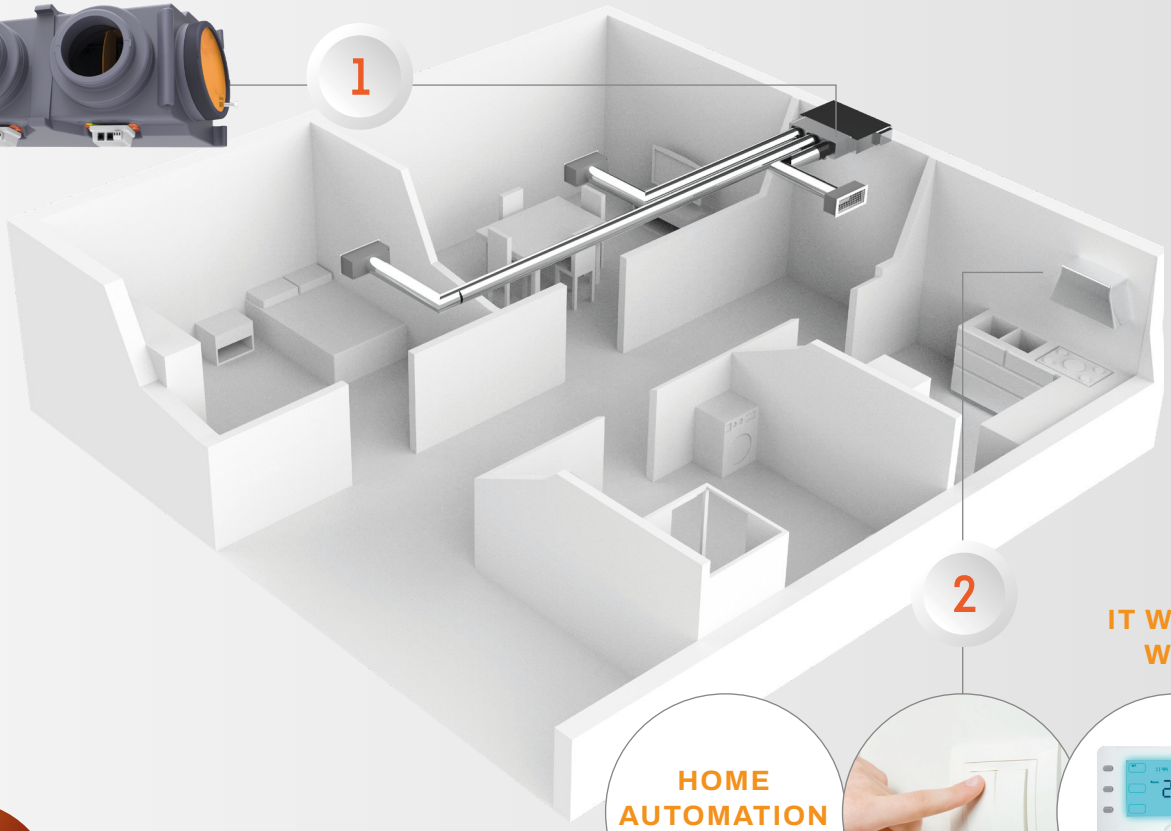

IT WORKS WITH

HOME AUTOMATION SYSTEMS





(SEE SHOWGAS CATALOG PAGE 25)

SIRIO 2.0 pack point

PLENUM COMPLETE WITH MOTORISED BUTTERFLY DAMPERS FOR POINT SYSTEM

THE SIRIO 2.0 POINT DAMPERS APPLIED TO PLENUMS FOR DUCTED UNITS AVAILABLE IN THE TECNOSYSTEMI CATALOGUE ALLOW MANAGEMENT OF THE AIR FLOW AND TEMPERATURE IN THE ROOMS WHERE AN AIR CONDITIONING SYSTEM IS INSTALLED. THE CLEAN CONTACT ON EACH SIRIO 2.0 POINT DAMPER ALLOWS THE DUCTS TO BE SWITCHED ON AND OFF, WITHOUT THE NEED TO USE THE POLARIS 4X OR 5X CONTROL UNITS. THE SIRIO 2.0 PACK POINTS INCLUDE AS STANDARD THE BUILT-IN POWER SUPPLY FOR EACH DAMPER AND THE MECHANICAL BYPASS TO BE INSTALLED TO THE RIGHT OR LEFT OF THE PLENUM TO AVOID POSSIBLE OVERPRESSURE SITUATIONS. THE SIRIO 2.0 PACK POINTS CAN BE MADE WITH ALL TYPES OF PLENUMS PRODUCED BY TECNOSYSTEMI: EOLO MINI / EOLO, ELECTRO-GALVANISED SHEET METAL AND PAL (PLENUM IN PAL AVAILABLE ON REQUEST, FOR QUOTES CALL THE TOLL-FREE NUMBER).


PLÉNUM ÉQUIPÉ DE FERMETURES MOTORISÉES À PAPILLON POUR SYSTÈME PONCTUEL

LES FERMETURE SIRIO 2.0 POINT APPLIQUÉES AUX PLÉNUMS POUR UNITÉS CANALISÉES DISPONIBLES DANS LE CATALOGUE TECNOSYSTEMI, PERMETTENT LA GESTION DU DÉBIT D'AIR ET DE LA TEMPÉRATURE DANS LES ENVIRONNEMENTS DANS LESQUELS UN SYSTÈME DE CLIMATISATION EST INSTALLÉ. LE CONTACT PROPRE DE CHAQUE REGISTRE SIRIO 2.0 POINT PERMET D'ALLUMER ET D'ÉTEINDRE LES CONDUITS SANS AVOIR À UTILISER LES UNITÉS DE COMMANDE POLARIS 4X OU 5X. LES SIRIO 2.0 PACK POINT COMPRENNENT EN SÉRIE L'ALIMENTATION ÉLECTRIQUE INTÉGRÉE POUR CHAQUE REGISTRE ET LA DÉRIVATION MÉCANIQUE À INSTALLER À DROITE OU À GAUCHE DU PLÉNUM POUR ÉVITER D'ÉVENTUELLES SITUATIONS DE SURPRESSION. LES SIRIO 2.0 PACK POINT PEUVENT ÊTRE RÉALISÉS AVEC TOUS LES TYPES DE PLÉNUMS PRODUITS PAR TECNOSYSTEMI : EOLO MINI / EOLO, FEUILLE ÉLECTRO-GALVANISÉE ET PAL (PLÉNUM EN PAL DISPONIBLE SUR DEMANDE POUR LES DEVIS, APPELEZ LE NUMÉRO SANS FRAIS).

PLENUM EINSCHLIESSLICH MIT MOTORISIERTER DROSSELKLAPPE FÜR POINT SYSTEM

DIE KLAPPEN SIRIO 2.0 POINT, DIE AN DEN IM TECNOSYSTEMI-KATALOG ERHÄLTLICHEN LUFTVERTEILERN FÜR KANALGERÄTE ANGEBRACHT WERDEN, ERMÖGLICHEN DIE STEUERUNG DES LUFTSTROMS UND DER TEMPERATUR IN DEN RÄUMEN, IN DENEN EIN KLIMASYSTEM INSTALLIERT IST. DER POTENTIALFREIE KONTAKT AN JEDER KLAPPE SIRIO 2.0 POINT ERMÖGLICHT DAS EIN- UND AUSSCHALTEN DER KANÄLE, OHNE DASS DIE POLARIS 4X ODER 5X STEUERGERÄTE VERWENDET WERDEN MÜSSEN. DIE SIRIO 2.0 PACK POINTS ENTHALTEN STANDARDMÄSSIG DIE EINGEBAUTE STROMVERSORGUNG FÜR JEDE KLAPPE UND DEN MECHANISCHEN BYPASS, DER RECHTS ODER LINKS VOM PLENUM INSTALLIERT WIRD, UM MÖGLICHE ÜBERDRUCKSITUATIONEN ZU VERMEIDEN. SIRIO 2.0 PACK PUNKTE KÖNNEN MIT ALLEN ARTEN VON PLENUMS VON TECNOSYSTEMI PRODUZIERT REALISIERT WERDEN: EOLO MINI / EOLO, GALVANISIERTES BLECH UND PAL (PLENUM IN PAL AUF ANFRAGE ERHÄLTLICH FÜR ANGEBOTE RUFEN SIE DIE GEBÜHRENFREIE NUMMER).

Installation example



1 Plenum Eolo 3 zone motorised damper Sirio Pack 2.0 Point



1 on / off switch

SIRIO 2.0 PACK POINT

MADE IN ITALY

MOTORISED CIRCULAR DAMPER IN PLASTIC MATERIAL

TECHNICAL SPECIFICATIONS

- AVAILABLE IN THE FOLLOWING VERSIONS:
- EOLO MINI Ø 125/150 MM 3 AND 4 ZONES
- EOLO Ø 150/200 MM 2, 3, 4 AND 5 ZONES
- SHEET METAL Ø 150 MM AND Ø 200 MM ZONES 2, 3, 4, 5 AND 6
- PAL Ø 150 MM AND Ø 200 MM ZONES 2, 3, 4, 5 AND 6 (FOR QUOTES FOR PAL PLENUM BOXES CALL FREEPHONE).
- OVERPRESSURE BYPASS SUPPLIED BUT NOT INSTALLED
- DUCTED UNIT ON/OFF CONTROL (CHECK IF INTERFACE USE IS REQUIRED)
- CAN BE MANAGED USING ANY ON/OFF CONTROL FOR OPENING AND CLOSING THE DAMPER

ERMETURE CIRCULAIRE MOTORISÉE EN PLASTIQUE


CARACTÉRISTIQUES TECHNIQUES


- DISPONIBLE DANS LES VERSIONS SUIVANTES :
- EOLO MINI Ø 125/150 MM 3 ET 4 ZONES
- EOLO Ø 150/200 MM 2, 3, 4 ET 5 ZONES
- TÔLE Ø 150 MM ET Ø 200 MM 2, 3, 4, 5 ET 6 ZONES
- PAL Ø 150 MM ET Ø 200 MM 2, 3, 4, 5 ET 6 ZONES (POUR LES DEVIS DES PLÉNUMS PAL APPELEZ LE NUMÉRO SANS FRAIS).
- DÉRIVATION DE SURPRESSION FOURNIE MAIS NON INSTALLÉE
- CONTRÔLE MARCHE/ARRÊT DE L'UNITÉ CANALISÉE (VÉRIFIER LA NÉCESSITÉ D'UTILISER L'INTERFACE)
- IL EST GÉRÉ PAR N'IMPORTE QUELLE COMMANDE ON/OFF POUR OUVRIR ET FERMER LE REGISTRE

MOTORISIERTE KREISKLAPPE KUNSTSTOFF

TECHNISCHE EIGENSCHAFTEN


- ERHÄLTLICH IN DEN FOLGENDEN VERSIONEN:
- EOLO MINI Ø 125/150 MM 3 UND 4 ZONEN
- EOLO Ø 150/200 MM 2, 3, 4 UND 5 ZONEN
- BLECH Ø 150 MM UND Ø 200 MM 2, 3, 4, 5 UND 6 ZONEN
- PAL Ø 150 MM UND Ø 200 MM 2, 3, 4, 5 UND 6 ZONEN (ANGEBOTE FÜR PAL-PLENUMS ERHALTEN SIE UNTER DER KOSTENLOSEN RUFNUMMER).
- ÜBERDRUCK-BYPASS MITGELIEFERT, ABER NICHT INSTALLIERT
- EIN-/AUS KONTROLLE DER KANALISIERTEN EINHEIT (ÜBERPRÜFEN, OB DIE SCHNITTSTELLE VERWENDET WERDEN MUSS)
- GESTEUERT DURCH EINE BELIEBIGE ON/OFF-STEUERUNG ZUM ÖFFNEN UND SCHLIESSEN DER KLAPPE

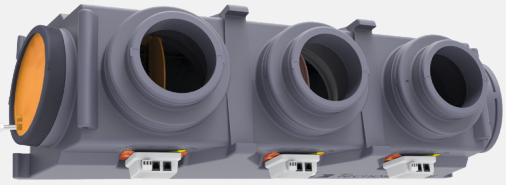

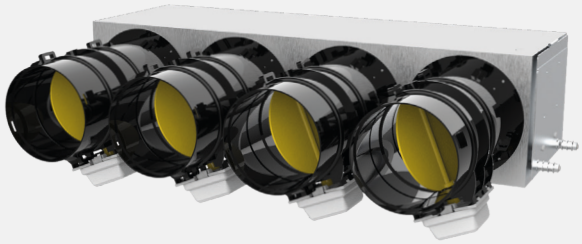

The delivery plenum for ducted unit is included in the price.
(please specify at the moment of order the code of plenum, see this catalog starting from pag.45)

4 ZONE SIRIO 2.0 PACK POINT CONNECTION WIRING DIAGRAM

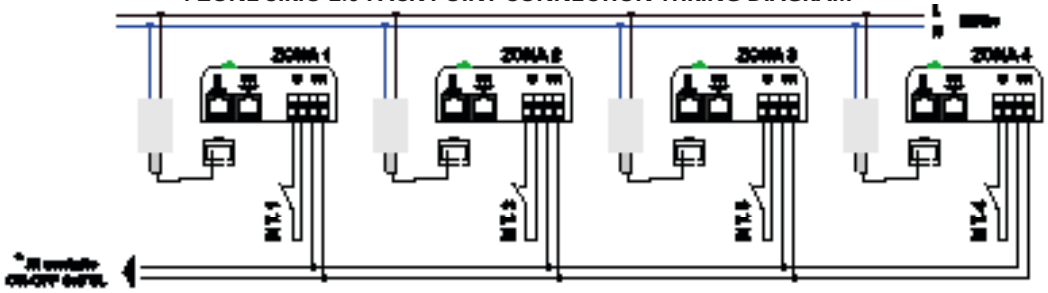

Datasheet


SIRIO 2.0 PACK POINT CODES CHRONOTHERMOSTAT NOT INCLUDED

CODE	DESCRIPTION
GAD600003	SIRIO 2.0 PACK 3 EOLO MINI
GAD600004	SIRIO 2.0 PACK 4 EOLO MINI
GAD600005	SIRIO 2.0 PACK 2 EOLO
GAD600006	SIRIO 2.0 PACK 3 EOLO
GAD600007	SIRIO 2.0 PACK 4 EOLO
GAD600008	SIRIO 2.0 PACK 5 EOLO
GAD600009	SIRIO 2.0 PACK 2 SHEET METAL Ø150
GAD600010	SIRIO 2.0 PACK 3 SHEET METAL Ø150
GAD600011	SIRIO 2.0 PACK 4 SHEET METAL Ø150
GAD600012	SIRIO 2.0 PACK 5 SHEET METAL Ø150
GAD600013	SIRIO 2.0 PACK 6 SHEET METAL Ø150
GAD600014	SIRIO 2.0 PACK 2 SHEET METAL Ø200
GAD600015	SIRIO 2.0 PACK 3 SHEET METAL Ø200
GAD600016	SIRIO 2.0 PACK 4 SHEET METAL Ø200
GAD600017	SIRIO 2.0 PACK 5 SHEET METAL Ø200
GAD600018	SIRIO 2.0 PACK 6 SHEET METAL Ø200

CODICI SIRIO 2.0 PACK POINT CODES CHRONOTHERMOSTAT INCLUDED

CODE	DESCRIPTION
GAD600019	SIRIO 2.0 PACK 3 EOLO MINI WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600020	SIRIO 2.0 PACK 4 EOLO MINI WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600021	SIRIO 2.0 PACK 2 EOLO WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600022	SIRIO 2.0 PACK 3 EOLO WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600023	SIRIO 2.0 PACK 4 EOLO WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600024	SIRIO 2.0 PACK 5 EOLO WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600025	SIRIO 2.0 PACK 2 SHEET METAL Ø 150 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600026	SIRIO 2.0 PACK 3 SHEET METAL Ø 150 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600027	SIRIO 2.0 PACK 4 SHEET METAL Ø 150 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600028	SIRIO 2.0 PACK 5 SHEET METAL Ø 150 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600029	SIRIO 2.0 PACK 6 SHEET METAL Ø 150 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600030	SIRIO 2.0 PACK 2 SHEET METAL Ø 200 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600031	SIRIO 2.0 PACK 3 SHEET METAL Ø 200 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600032	SIRIO 2.0 PACK 4 SHEET METAL Ø 200 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600033	SIRIO 2.0 PACK 5 SHEET METAL Ø 200 WITH SMART SIRIO CHRONOTHERMOSTAT
GAD600034	SIRIO 2.0 PACK 6 SHEET METAL Ø 200 WITH SMART SIRIO CHRONOTHERMOSTAT

ATTENTION: the SIRIO 2.0 PACK POINT SYSTEMS include the dampers installed and relative testing
The chronothermostats or push-button panels are not included in the price.

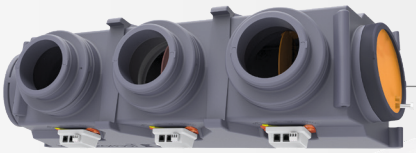



SIRIO 0.10V pack

PLENUM COMPLETE WITH MOTORISED BUTTERFLY DAMPERS FOR POINT SYSTEM

THE SIRIO 0.10V POINT DAMPERS INSTALLED ON A DELIVERY PLENUM FOR DUCTED UNITS ALLOW THE USE OF THE "SIRIO 0-10V PACK POINT" SYSTEM, DESIGNED FOR THE MANAGEMENT OF AREAS WITHIN AN AIR CONDITIONING SYSTEM.
THE SIRIO 0-10V PACK POINT SYSTEM ALLOWS CONTROLLING THE OPENING, CLOSING AND PARTIALISATION OF THE BUTTERFLY VALVES OF THE DAMPERS VIA THE 0-10V REGULATOR OF A DOMOTIC SYSTEM.
IF ALL DAMPERS ARE CLOSED, THE DUCTED UNIT MAY BE TURNED OFF VIA THE CLEAN CONTACT AT OUTPUT OF EACH MOTOR OF THE SIRIO 0-10V POINT DAMPER.
THE CLEAN CONTACT ON EACH SIRIO 0-10V POINT DAMPER ALLOWS ADJUSTING THE BUTTERFLY VALVE AND TURNING ON AND OFF THE DUCTED UNIT WITHOUT HAVING TO USE THE POLARIS 4X OR 5X CONTROL UNITS.


PLÉNUM ÉQUIPÉ DE FERMETURES MOTORISÉES À PAPILLON POUR SYSTÈME PONCTUEL

LES FERMETURES SIRIO 0.10V POINT INSTALLÉES SUR UN PLÉNUM DE REFOULEMENT POUR APPAREILS CANALISÉS, PERMETTENT D'UTILISER LE SYSTÈME « SIRIO 0-10V PACK POINT », DESTINÉ À LA GESTION DES ZONES D'UN SYSTÈME DE CLIMATISATION.
LE SYSTÈME SIRIO 0.10V PACK POINT PERMET LE CONTRÔLE DE L'OUVERTURE, DE LA FERMETURE ET DE LA PARTIALISATION DU PAPILLON DES FERMETURES AU MOYEN DU RÉGULATEUR 0-10V D'UN SYSTÈME DOMOTIQUE.
EN CAS DE FERMETURE COMPLÈTE DE TOUTES LES FERMETURES, IL EST POSSIBLE D'ÉTEINDRE LA MACHINE CANALISÉE À L'AIDE DU CONTACT DE SORTIE PROPRE PRÉSENT SUR CHAQUE MOTEUR DU SIRIO 0-10V POINT.
LE CONTACT PROPRE SUR CHAQUE FERMETURE SIRIO 0-10V POINT PERMET DE RÉGLER LE PAPILLON, L'ACTIVATION ET LA DÉSACTIVATION DU CONDUIT SANS AVOIR BESOIN D'UTILISER LES UNITÉS DE COMMANDE POLARIS 4X OU 5X.

PLENUM EINSCHLIESSLICH MIT MOTORISIERTER DROSSELKLAPPE FÜR POINT SYSTEM

DER SCHIEBER SIRIO 0,10 V POINT, DIE AUF EINEM DRUCKPLENUM FÜR KANALGERÄTE INSTALLIERT SIND, ERMÖGLICHEN IHNEN DIE VERWENDUNG DES „SIRIO 0-10 V PACK POINT“-SYSTEMS, DAS FÜR DIE VERWALTUNG DER ZONEN IN EINEM KLIMAANLAGENSYSTEM ENTWICKELT WURDE.
DAS SYSTEM SIRIO 0.10V PACK POINT ERMÖGLICHT DIE STEUERUNG DES ÖFFNENS, SCHLIESSENS UND DER TEILUNG DER DRSOSSELKLAPPE DES SCHIEBERS MIT HILFE DES REGLERS 0-10 V EINES HAUSAUTOMATIONSSYSTEMS.
IM FALLE EINER VOLLSTÄNDIGEN SCHLIESSUNG ALLER SCHIEBER IST ES MÖGLICH, DAS KANALISIERTE GERÄT ÜBER DEN SAUBEREN AUSGANGSKONTAKT AN JEDEM MOTOR DES SIRIO 0-10V POINT AUSZUSCHALTEN.
DER POTENTIALFREIE KONTAKT AN JEDEM SIRIO-SCHIEBER 0-10V POINT ERMÖGLICHT DAS EINSTELLEN DER DROSSELKLAPPE, DAS EIN- UND AUSSCHALTEN DES KANALS, OHNE DASS DIE POLARIS 4X- ODER 5X-STEUEREINHEITEN VERWENDET WERDEN MÜSSEN.

Installation example



1 Plenum Eolo 3 zone motorised damper Sirio Pack 0.10V



1 on / off switch

SIRIO 2.0 PACK POINT

MADE IN ITALY

MOTORISED CIRCULAR DAMPER IN PLASTIC MATERIAL

TECHNICAL SPECIFICATIONS

- ANTI-CONDENSATION ABS PLASTIC
- BUILT-IN POWER SUPPLY INCLUDED
- OUT CONTACT: ON/OFF (CLOSED, BUTTERFLY VALVE OPEN) (OPEN, BUTTERFLY VALVE CLOSED)
- INPUT: 0-10V (REGULATOR NOT SUPPLIED AND NOT LISTED IN THE CATALOGUE
- REMOVABLE, ROTATABLE MOTOR FOR EASY MAINTENANCE
- OPERATING TEMPERATURE 0°C A +70°C
- AVAILABLE IN 5Ø

ERMETURE CIRCULAIRE MOTORISÉE EN PLASTIQUE


CARACTÉRISTIQUES TECHNIQUES


- PLASTIQUE ABS ANTI-CONDENSATION
- BLOC D'ALIMENTATION INTÉGRÉ INCLUS
- CONTACT OUT : ON/OFF (FERMÉ, PAPILLON OUVERT) (OUVERT, PAPILLON FERMÉ)
- ENTRÉE : 0-10V (RÉGULATEUR NON FOURNI ET NON DISPONIBLE AU CATALOGUE
- MOTEUR AMOVIBLE ET ROTATIF POUR UN ENTRETIEN FACILE
- TEMPÉRATURE DE FONCTIONNEMENT 0°C A +70°C
- DISPONIBLE EN 5Ø

MOTORISIERTE KREISKLAPPE KUNSTSTOFF


TECHNISCHE EIGENSCHAFTEN

- ANTIKONDENSATIONS-ABS-KUNSTSTOFF
- INTEGRIERTES NETZTEIL IM LIEFERUMFANG ENTHALTEN
- OUT-KONTAKT: EIN / AUS (GESCHLOSSEN, DROSSELKLAPPE OFFEN) (OFFEN, DROSSELKLAPPE GESCHLOSSEN)
- EINGANG: 0-10V (REGLER NICHT IM LIEFERUMFANG ENTHALTEN UND NICHT IM KATALOG VERFÜGBAR)
- ABNEHMBARER UND DREHBARER MOTOR FÜR EINFACHE WARTUNG
- BETRIEBSTEMPERATUR 0°C BIS +70°C
- ERHÄLTLICH IN 5Ø

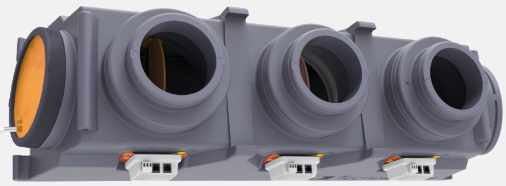

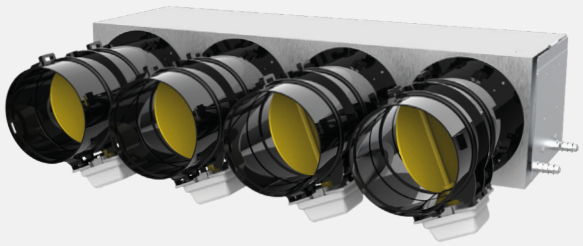


The delivery plenum for ducted unit is included in the price.
(please specify at the moment of order the code of plenum, see this catalog starting from pag.45)

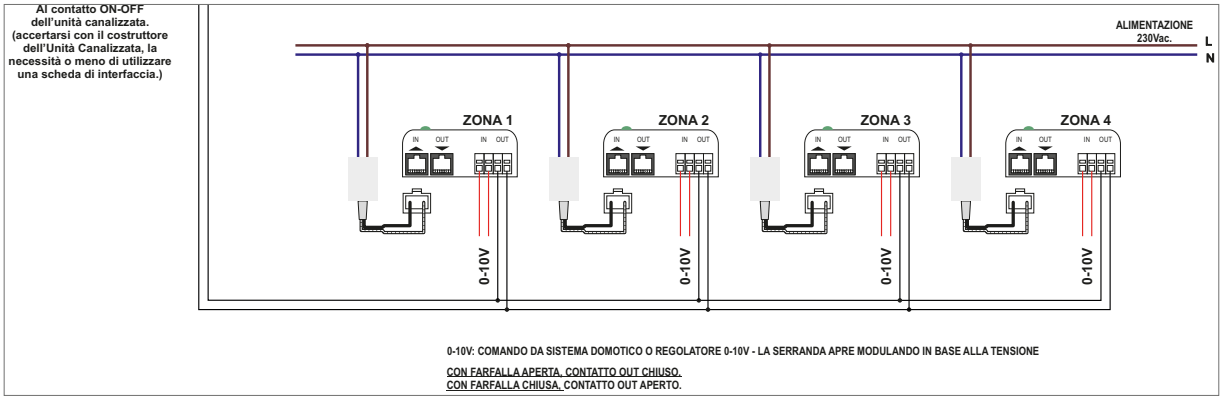

Datasheet

CODE	DESCRIPTION
GAD600035	SIRIO 0.10V PACK 3 EOLO MINI
GAD600036	SIRIO 0.10V PACK 4 EOLO MINI
GAD600037	SIRIO 0.10V PACK 2 EOLO
GAD600038	SIRIO 0.10V PACK 3 EOLO
GAD600039	SIRIO 0.10V PACK 4 EOLO
GAD600040	SIRIO 0.10V PACK 5 EOLO
GAD600041	SIRIO 0.10V PACK 2 SHEET METAL Ø 150
GAD600042	SIRIO 0.10V PACK 3 SHEET METAL Ø 150
GAD600043	SIRIO 0.10V PACK 4 SHEET METAL Ø 150
GAD600044	SIRIO 0.10V PACK 5 SHEET METAL Ø 150
GAD600045	SIRIO 0.10V PACK 6 SHEET METAL Ø 150
GAD600046	SIRIO 0.10V PACK 2 SHEET METAL Ø 200
GAD600047	SIRIO 0.10V PACK 3 SHEET METAL Ø 200
GAD600048	SIRIO 0.10V PACK 4 SHEET METAL Ø 200
GAD600049	SIRIO 0.10V PACK 5 SHEET METAL Ø 200
GAD600050	SIRIO 0.10V PACK 6 SHEET METAL Ø 200


ATTENTION: the SIRIO 2.0 PACK POINT SYSTEMS include the dampers installed and relative testing
The chronothermostats or push-button panels are not included in the price.

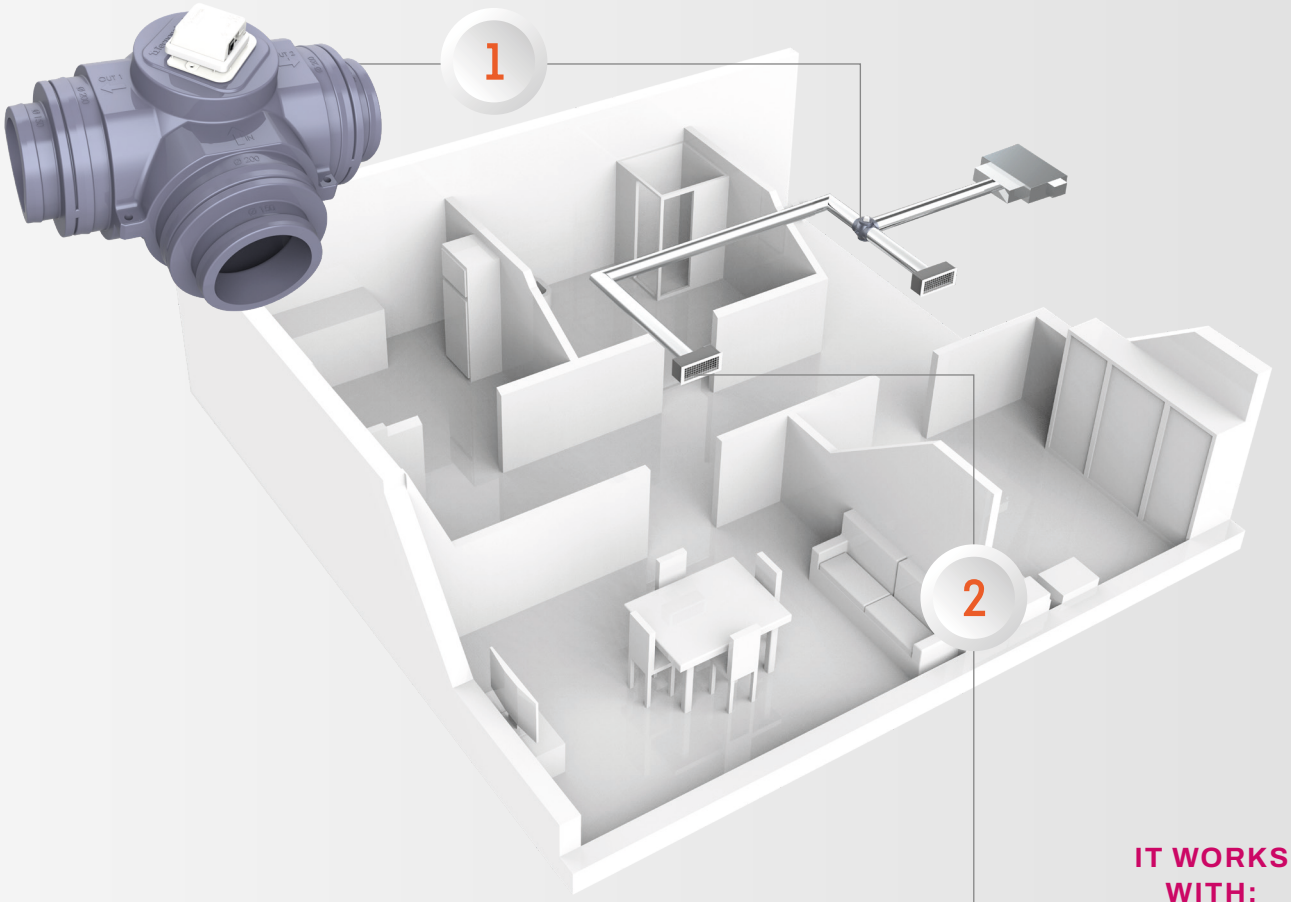

SIRIO 3.0 devio point

IT WORKS WITH:

HOME AUTOMATION SYSTEMS





(SEE SHOWGAS CATALOG PAGE 25)

"T" FLOW DIVERTER WITH MOTORISED DAMPER FOR POINT SYSTEM

THE SIRIO DEVIO 3.0 MOTORISED SHUNT ALLOWS THE AIR FLOW TO BE DIVERTED FROM ONE ENVIRONMENT TO ANOTHER BY MEANS OF A CLEAN CONTACT OF ANY KIND. FOR EXAMPLE, IN THE RESIDENTIAL AREA IT IS POSSIBLE TO DIVERT THE AIR FLOW FROM THE LIVING AREA TO THE SLEEPING AREA AND/OR VICE VERSA DUE TO A SWITCH.


DÉVIATEUR DE FLUX EN « T » AVEC REGISTRE MOTORISÉ POUR SYSTÈME PONCTUEL

LA DÉRIVATION MOTORISÉE SIRIO DEVIO 3.0 PERMET DE DÉVIER LE FLUX D'AIR D'UN ENVIRONNEMENT VERS UN AUTRE AU MOYEN D'UN CONTACT PROPRE DE TOUT TYPE.
PAR EXEMPLE, DANS LA ZONE RÉSIDENTIELLE, IL EST POSSIBLE DE DÉVIER LE FLUX D'AIR DE LA ZONE JOUR VERS LA ZONE NUIT ET/OU VICE VERSA GRÂCE À UN COMMUTATEUR.

STRÖMUNGSUMLENKER "T" MIT MOTORISIERTER KLAPPE FÜR POINT SYSTEM

MIT DEM MOTORISCHEN BYPASS SIRIO DEVIATION 3.0 KANN DER LUFTSTROM DURCH EINEN SAUBEREN KONTAKT ALLER ART VON EINER UMGEBUNG IN EINE ANDERE UMGELEITET WERDEN. BEISPIELSWEISE IST ES IM WOHNBEREICH MÖGLICH, DEN LUFTSTROM VOM WOHNBEREICH ZUM SCHLAFBEREICH UND/ODER UMGEKEHRT DURCH EINEN SCHALTER UMZULEITEN.

Installation example



1 "T" flow diverter with motorised damper



1 on / off switch

SIRIO DEVIO 3.0 POINT

MADE IN ITALY

MOTORISED CIRCULAR DAMPER IN PLASTIC MATERIAL

TECHNICAL SPECIFICATIONS

- ANTI-CONDENSATION ABS PLASTIC
- BUILT-IN POWER SUPPLY INCLUDED
- OUT CONTACT: ON/OFF (CLOSED, BUTTERFLY VALVE OPEN) (OPEN, BUTTERFLY VALVE CLOSED)
- INPUT: 0-10V (REGULATOR NOT SUPPLIED AND NOT LISTED IN THE CATALOGUE
- REMOVABLE, ROTATABLE MOTOR FOR EASY MAINTENANCE
- OPERATING TEMPERATURE 0°C A +70°C
- AVAILABLE IN 5Ø

ERMETURE CIRCULAIRE MOTORISÉE EN PLASTIQUE


CARACTÉRISTIQUES TECHNIQUES

- PLASTIQUE ABS ANTI-CONDENSATION
- BLOC D'ALIMENTATION INTÉGRÉ INCLUS
- CONTACT OUT : ON/OFF (FERMÉ, PAPILLON OUVERT) (OUVERT, PAPILLON FERMÉ)
- ENTRÉE : 0-10V (RÉGULATEUR NON FOURNI ET NON DISPONIBLE AU CATALOGUE
- MOTEUR AMOVIBLE ET ROTATIF POUR UN ENTRETIEN FACILE
- TEMPÉRATURE DE FONCTIONNEMENT 0°C A +70°C
- DISPONIBLE EN 5Ø


MOTORISIERTE KREISKLAPPE KUNSTSTOFF


TECHNISCHE EIGENSCHAFTEN

- ANTIKONDENSATIONS-ABS-KUNSTSTOFF
- INTEGRIERTES NETZTEIL IM LIEFERUMFANG ENTHALTEN
- OUT-KONTAKT: EIN / AUS (GESCHLOSSEN, DROSSELKLAPPE OFFEN) (OFFEN, DROSSELKLAPPE GESCHLOSSEN)
- EINGANG: 0-10V (REGLER NICHT IM LIEFERUMFANG ENTHALTEN UND NICHT IM KATALOG VERFÜGBAR)
- ABNEHMBARER UND DREHBARER MOTOR FÜR EINFACHE WARTUNG
- BETRIEBSTEMPERATUR 0°C BIS +70°C
- ERHÄLTLICH IN 5Ø

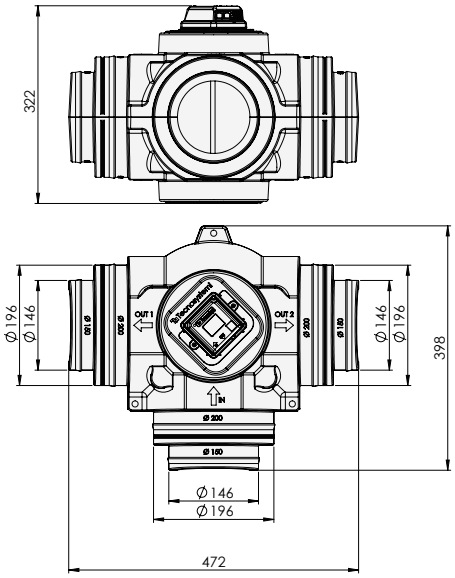



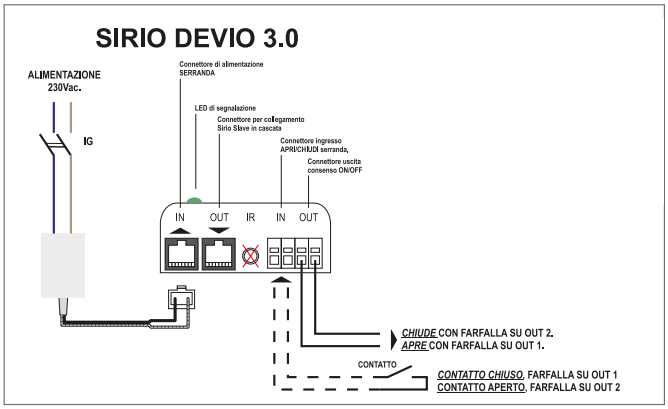

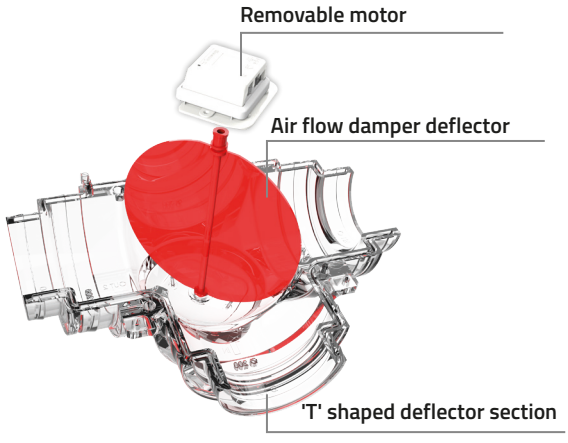

YouTube
VIDEO

Datasheet

CODE	DESCRIPTION
GAD600001	SIRIO DEVIO 3.0 POINT "T" FLOW DIVERTER WITH MOTORISED DAMPER



SIRIO point

MOTORISED BUTTERFLY DAMPER

THE SIRIO BUTTERFLY DAMPERS HAVE AN END-OF-STROKE MICRO CONTACT, WHICH INDICATES THE OPENING AND CLOSING POSITION OF THE BUTTERFLY WITH A CLEAN ON/OFF CONTACT.
IT INTEGRATES PERFECTLY INTO NEW AND EXISTING DUCTED SYSTEMS IN WHICH IT IS INTENDED TO MANAGE ONLY A PART OF THE DUCTED SYSTEM.

FERMETURE MOTORISÉE À PAPILLON

LA FERMETURE À PAPILLON SIRIO A UN MICRO-CONTACT DE FIN DE COURSE, QUI INDIQUE LA POSITION D'OUVERTURE ET DE FERMETURE DU PAPILLON AVEC UN CONTACT PROPRE MARCHE/ARRÊT.
IL S'INTÈGRE PARFAITEMENT DANS LES SYSTÈMES DE GOULOTTES NEUFS ET EXISTANTS DANS LESQUELS IL EST PRÉVU DE NE GÉRER QU'UNE PARTIE DU SYSTÈME À GOULOTTES.

MOTORISIERTE KREISKLAPPE KUNSTSTOFF

DIE SIRIO-KLAPPE IST MIT EINEM MIKROKONTAKT FÜR DAS HUBENDE AUSGESTATTET, DER MIT EINEM TROCKENEN ON/OFF-KONTAKT DIE ÖFFNUNGS- UND SCHLIESSSTELLUNG DER KLAPPE ANZEIGT.
ES LÄSST SICH PERFEKT IN NEUE UND BESTEHENDE LEITUNGSSYSTEME INTEGRIEREN, IN DENEN NUR EIN TEIL DES LEITUNGSSYSTEMS VERWALTET WERDEN SOLL.

Installation example



1 Sirio Point
motorised butterfly damper



1 on / off switch

SIRIO POINT

MADE IN ITALY

MOTORISED CIRCULAR DAMPER IN PLASTIC MATERIAL

TECHNICAL SPECIFICATIONS

- MADE FROM GALVANISED METAL
- BUTTERFLY OPENING FROM 0 TO 90°
- OPERATING TEMPERATURE 0°C TO +70°C
- INCLUDES MOTOR (220 V POWER SUPPLY)
- OPTION OF MANAGEMENT BY MEANS OF: WALL/BUILT-IN REGULATOR, WITH DEFLECTOR, WITH THERMOSTATS.

FERMETURE CIRCULAIRE MOTORISÉE EN PLASTIQUE

CARACTÉRISTIQUES TECHNIQUES

- FABRIQUÉ EN MÉTAL GALVANISÉ
- OUVERTURE PAPILLON DE 0 À 90°
- TEMPÉRATURE DE FONCTIONNEMENT DE 0°C À +70°C
- LIVRÉ AVEC MOTEUR (ALIMENTATION 220 V)
- POSSIBILITÉ DE GESTION PAR : RÉGULATEUR MURAL / ENCASTRÉ, AVEC AIGUILLAGE, AVEC THERMOSTATS.

MOTORISIERTE KREISKLAPPE KUNSTSTOFF


TECHNISCHE EIGENSCHAFTEN


- AUS VERZINKTEM METALL
- SCHMETTERLINGSÖFFNUNG VON 0 BIS 90°
- BETRIEBSTEMPERATUR VON 0°C BIS +70°C
- MIT MOTOR AUSGESTATTET (220 V STROMVERSORGUNG)
- VERWALTUNGSMÖGLICHKEIT ÜBER: WAND-/EINBAUREGLER, MIT SCHALTER, MIT THERMOSTATEN

AVAILABLE ON DEMAND
SIRIO 2.0 PACK SYSTEM INSTALLED ON PLENUM

SYSTÈME SIRIO 2.0 PACK INSTALLÉ SUR PLÉNUM DISPONIBLE SUR DEMANDE

AUF ANFRAGE IST DAS SIRIO 2.0 PACK SYSTEM AUF DEM PLENUM INSTALLIERT VERFÜGBAR

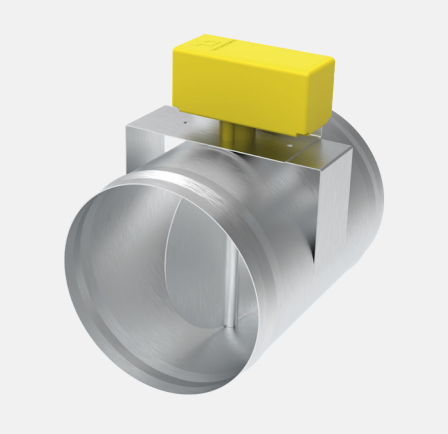

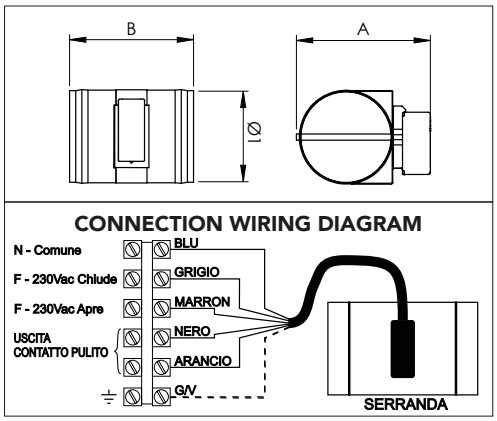

Datasheet

CODE	DESCRIPTION	A [mm]	B [mm]	Ø1[mm]
11161854	MOTORISED BUTTERFLY DAMPER FOR POINT SYSTEM SIRIO POINT - Ø120	190	154	120
11161855	MOTORISED BUTTERFLY DAMPER FOR POINT SYSTEM - Ø150	220	154	150
11161856	MOTORISED BUTTERFLY DAMPER FOR POINT SYSTEM - Ø200	270	154	200
11161857	MOTORISED BUTTERFLY DAMPER FOR POINT SYSTEM - Ø250	320	154	250
C11161863	SERVOMOTOR FOR MOTORISED BUTTEFGLY DAMPER			

BUILT-IN OR WALL-MOUNTED REGULATOR

for 230 V motorised butterfly damper

TECHNICAL SPECIFICATIONS

- POWER SUPPLY 230 V - 50/60 HZ
- MODULATING CONTROLLER
- LED GRADUATED SCALE

RÉGULATEUR ENCASTRÉ OU MURAL

pour fermeture motorisée à papillon 230 V

CARACTÉRISTIQUES TECHNIQUES

- ALIMENTATION 230 V - 50/60 HZ
- RÉGULATEUR MODULANT
- ÉCHELLE GRADUÉE À DEL


UNTERPUTZ- ODER AUFPUTZ-SPOTREGLER

für motorisierte Absperrklappe 230 V

TECHNISCHE EIGENSCHAFTEN

- STROMVERSORGUNG 230 V - 50/60 HZ
- MODULATIONSREGLER
- LED-SKALA




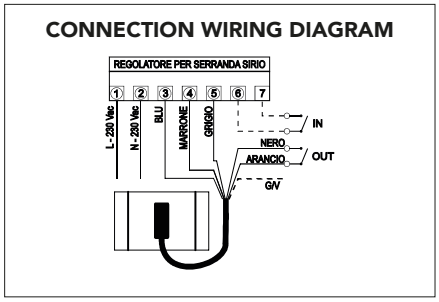

MADE IN ITALY

Datasheet

CODE	DESCRIPTION
11161874	BUILT-IN REGULATOR FOR 230 V MOTORISED BUTTERFLY DAMPER
11161875	WALL-MOUNTED REGULATOR FOR 230 V MOTORISED BUTTERFLY DAMPER

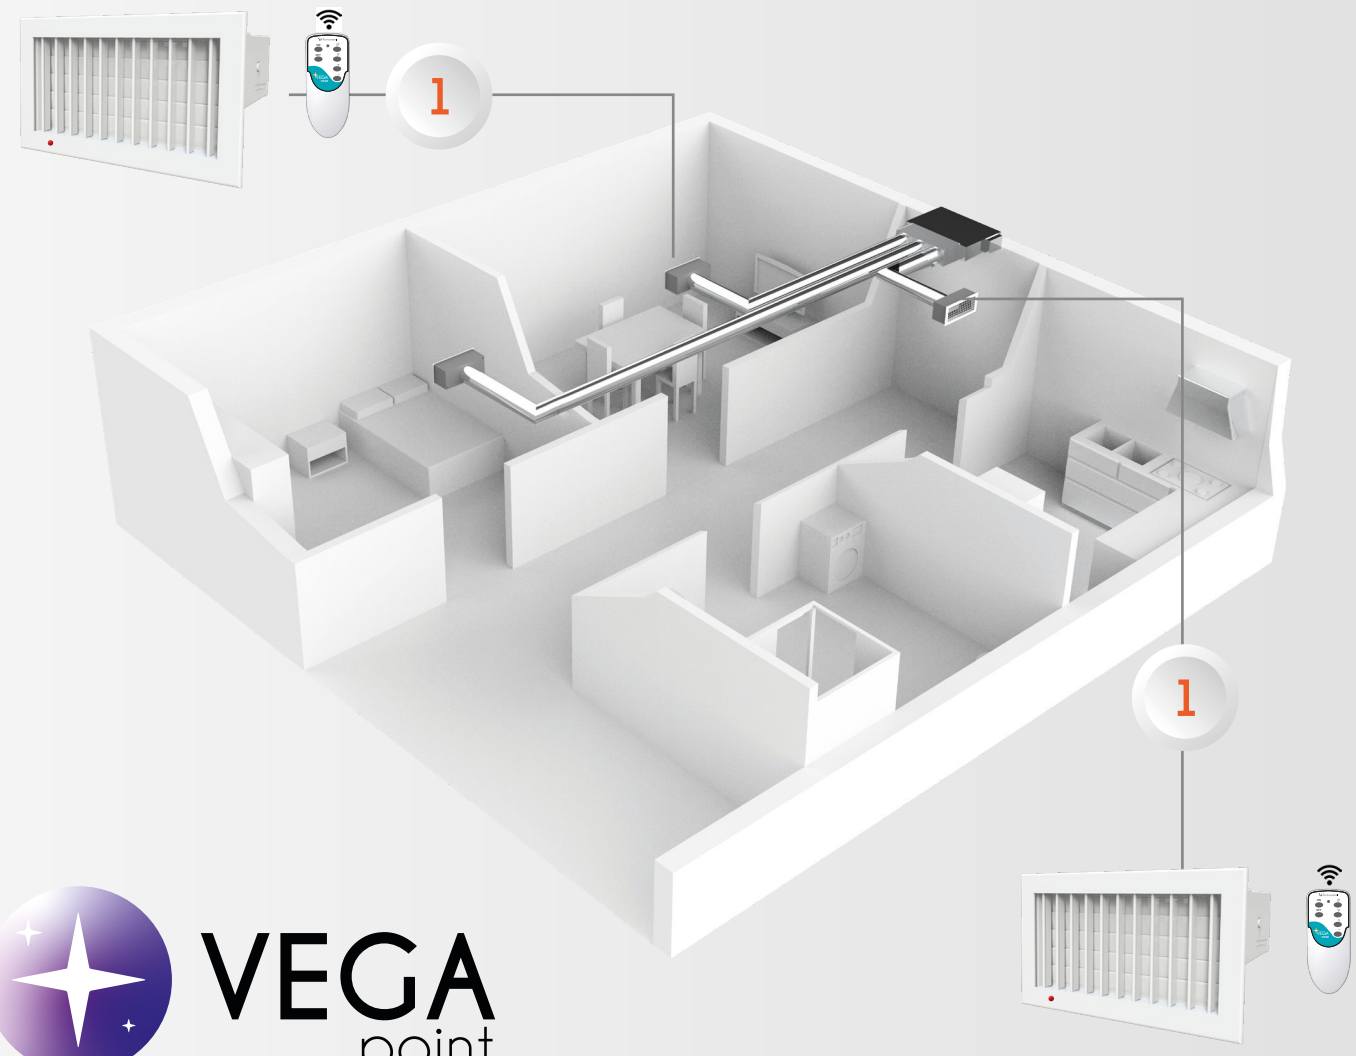

VEGA point

WHITE MOTORISED DELIVERY NOZZLE

with remote control IR

THE MOTORISED NOZZLE CAN BE USED IN NEW AND EXISTING DUCTED SYSTEMS.
THE NOZZLE IS OPERATED VIA THE SUPPLIED IR REMOTE CONTROL.
THE FLAPS EQUIPPED WITH RUBBER GASKET GUARANTEE TIGHTNESS TO THE PASSAGE OF AIR WITH CLOSED NOZZLE AND AVOID NOISE.

GRILLE DE REFOULEMENT MOTORISÉE BLANCHE

avec télécommande IR

LA GRILLE MOTORISÉE PEUT ÊTRE UTILISÉE DANS DES SYSTÈMES DE GOULOTTES NEUFS ET EXISTANTS.
LA GRILLE EST ACTIONNÉE VIA LA TÉLÉCOMMANDE IR FOURNIE.
LES AILETTES ÉQUIPÉES DE JOINT EN CAOUTCHOUC, GARANTISSENT L'ÉTANCHÉITÉ AU PASSAGE DE L'AIR AVEC GRILLE FERMÉE ET ÉVITENT LE BRUIT.

WEISSE MOTORISIERTE ZULUFTÖFFNUNG

mit Fernbedienung IR


DIE MOTORISIERTE DÜSE KANN IN NEUEN UND BESTEHENDEN LEITUNGSSYSTEMEN EINGESETZT WERDEN.
DIE BEDIENUNG DER DÜSE ERFOLGT ÜBER DIE MITGELIEFERTE IR-FERNBEDIENUNG.
DIE MIT GUMMIDICHTUNG AUSGESTATTETEN LAMELLEN GARANTIEREN DIE DICHTHEIT GEGEN DEN LUFTDURCHTRITT BEI GESCHLOSSENER DÜSE UND VERMEIDEN GERÄUSCHE.

THE NOZZLE CAN BE ADJUSTED INTO FOUR POSITIONS:

25%	1/4
50%	2/4
75%	3/4
100%	4/4 MAXIMUM OPENING

YouTube

Installation example

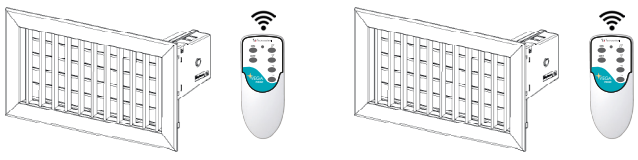

2 white Vega Point motorised delivery nozzle with remote control IR

VEGA POINT

CE MADE IN ITALY

WHITE MOTORISED DELIVERY NOZZLE

with remote control IR

TECHNICAL SPECIFICATIONS

- WHITE PAINTED ALUMINIUM
- INSTALLATION VIA STEEL CLIPS
- REMOTE CONTROL AND POWER SUPPLY INCLUDED ("MASTER" VERSION)
- "SLAVE" VERSION WITHOUT REMOTE CONTROL AND POWER SUPPLY
- AUXILIARY OUT CONTACT
- POWER SUPPLY 220 V
- MAX CONVEYANCE LENGTH 25 M
- A MAXIMUM OF 8 DELIVERY NOZZLES CAN BE INSTALLED IN DUCTING

GRILLE DE REFOULEMENT MOTORISÉE BLANCHE

avec télécommande IR

CARACTÉRISTIQUES TECHNIQUES

- ALUMINIUM PEINT EN BLANC
- INSTALLATION VIA DES ATTACHES EN ACIER
- TÉLÉCOMMANDE ET ALIMENTATION INCLUS (VERSION « MAÎTRE »)
- VERSION « ESCLAVE » SANS TÉLÉCOMMANDE NI ALIMENTATION
- CONTACT AUXILIAIRE SORTIE
- ALIMENTATION 220 V
- LONGUEUR MAXIMALE DE LA CATÉNAIRE 25 M
- 8 BUSES MAX. PEUVENT ÊTRE INSTALLÉES DANS LA CATÉNAIRE


WEISSE MOTORISIERTE ZULUFTÖFFNUNG


mit Fernbedienung IR

TECHNISCHE EIGENSCHAFTEN

- WEISS LACKIERTES ALUMINIUM
- MONTAGE MIT STAHLCLIPS
- FERNSTEUERUNG UND STROMVERSORGUNG IM LIEFERUMFANG ENTHALTEN („MASTER“ -VERSION)
- "SLAVE"-VERSION OHNE FERNBEDIENUNG UND STROMVERSORGUNG
- HILFSKONTAKT OUT
- STROMVERSORGUNG 220 V
- MAX. KETTENLINIENLÄNGE 25 M
- ES KÖNNEN MAXIMAL 8 LUFTGITTER IN DER KETTENLINIE INSTALLIERT WERDEN

AIR FLOW DIAGRAM

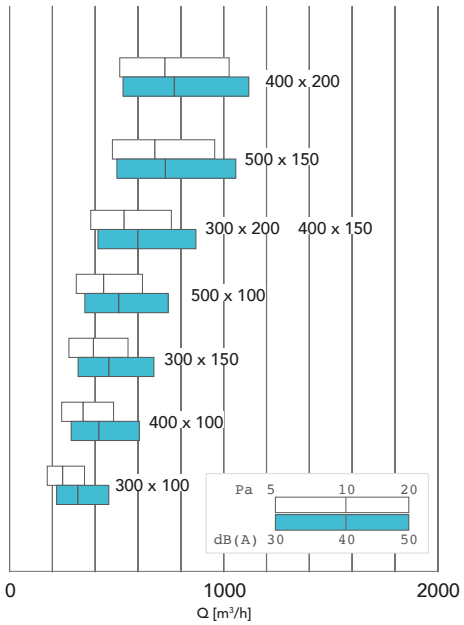


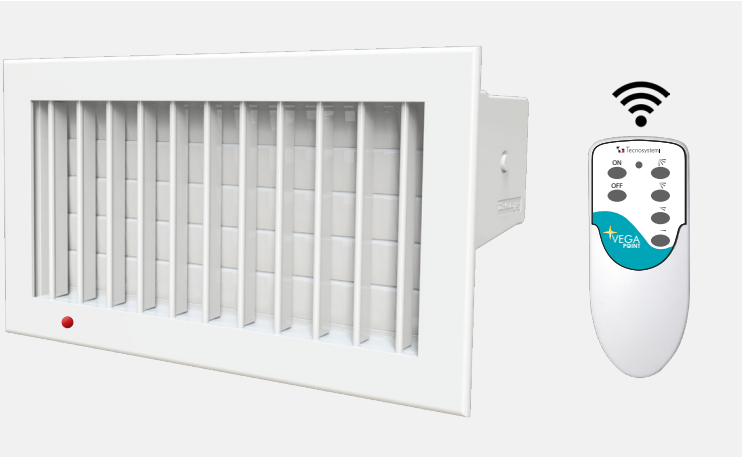




BUILT-IN POWER SUPPLY

Datasheet

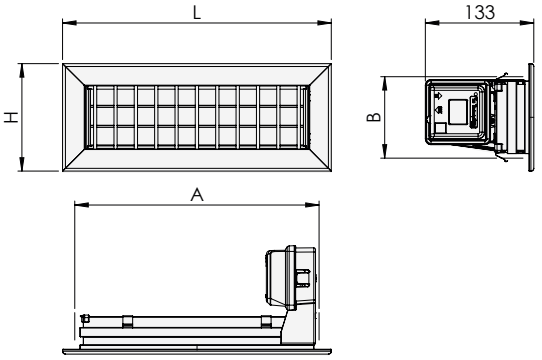

DIMENSIONS [mm] MASTER GRILLE					DIMENSIONS [mm] SLAVE GRILLE				
CODE	L	H	A	B	CODE	L	H	A	B
GAD200001	332	132	300	100	GAD200013	332	132	300	100
GAD200002	332	182	300	150	GAD200014	332	182	300	150
GAD200003	332	232	300	200	GAD200015	332	232	300	200
GAD200004	432	132	400	100	GAD200016	432	132	400	100
GAD200005	432	182	400	150	GAD200017	432	182	400	150
GAD200006	432	232	400	200	GAD200018	432	232	400	200
GAD200007	532	132	500	100	GAD200019	532	132	500	100
GAD200008	532	182	500	150	GAD200020	532	182	500	150


CONNECTION WIRING DIAGRAM

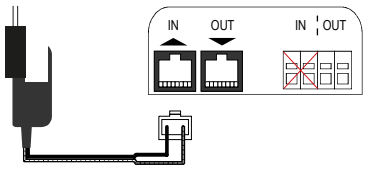


EXAMPLE OF INSTALLATION 2 GRILLES




EXAMPLE OF INSTALLATION 4 GRILLES

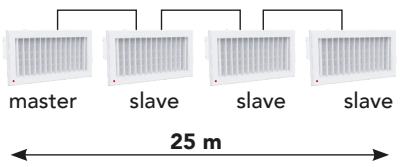

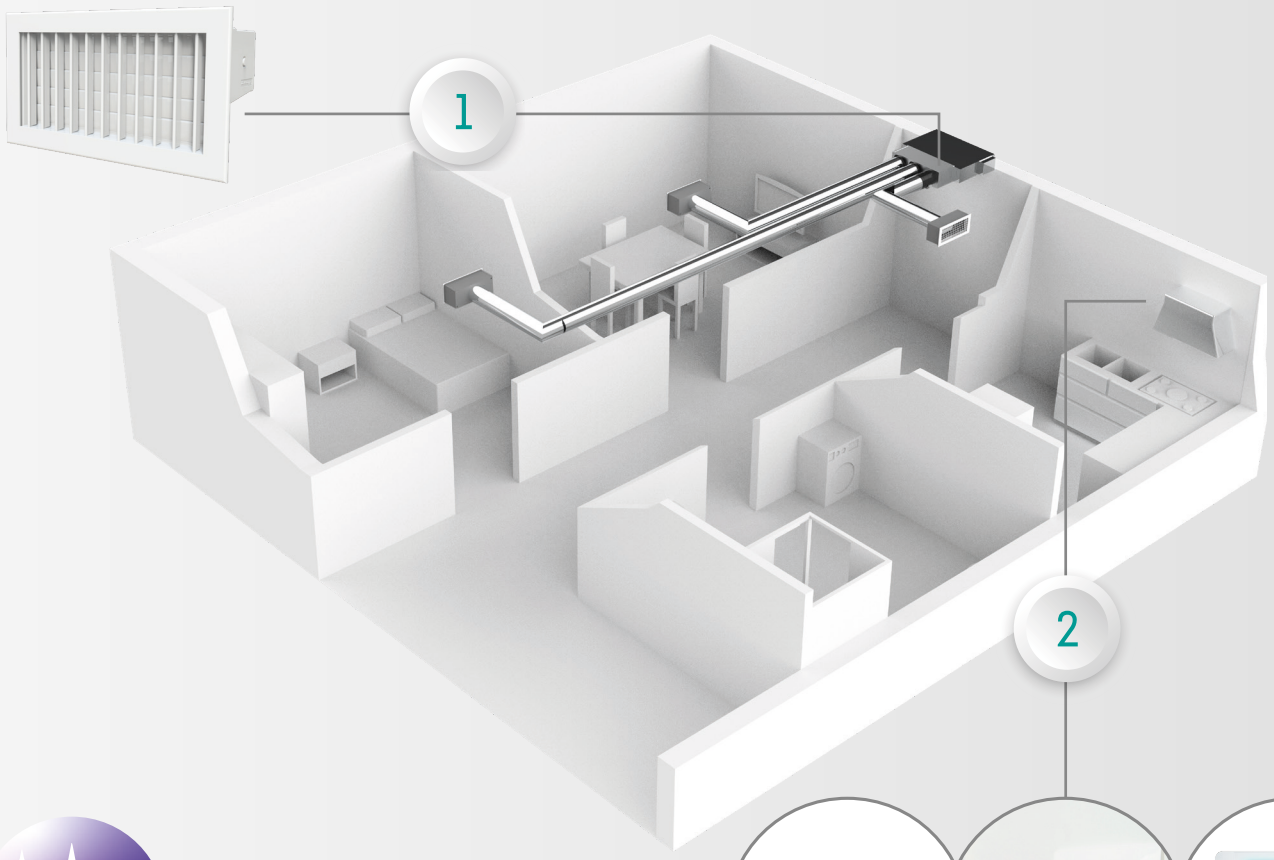

VEGA point

HOME AUTOMATION SYSTEMS





(SEE SHOWGAS CATALOG PAG. 25)

WHITE MOTORISED DELIVERY NOZZLE

THE MOTORIZED NOZZLE CAN BE USED IN NEW AND EXISTING DUCTED SYSTEMS. THE OPERATION OF THE NOZZLE TAKES PLACE WITHOUT THE AID OF ANY CONTROL UNIT OR A PARTICULAR COMMAND. IT IS PERFECTLY INTEGRATED IN NEW AND EXISTING DUCTED SYSTEMS IN WHICH YOU WANT TO MANAGE ONLY A PART OF THE DUCTED SYSTEM: THIS SOLUTION DOES NOT REQUIRE THE INSTALLATION OF ANY SYSTEM THAT MANAGES THE IGNITION / SHUTDOWN OF THE INTERNAL BY-PASS MOTOR. THEREFORE IT ALLOWS THE MANAGEMENT OF THE AIR FLOW IN THE INDIVIDUAL ROOMS WITHOUT THE HELP OF THE ELECTRONIC CONTROL UNIT FOR OPERATION. THE FINS EQUIPED WITH RUBBER GASKET GUARANTEE SEAL TO AIR PASSAGE WITH THE VENT CLOSED AND AVOID NOISE.

GRILLE DE REFOULEMENT MOTORISÉE BLANCHE

LA GRILLE DE REFOULEMENT MOTORISÉE PEUT ÊTRE UTILISÉE DANS DES SYSTÈMES DE CONDUITS NOUVEAUX ET EXISTANTS. LE FONCTIONNEMENT DE LA BUSE S'EFFECTUE SANS L'AIDE D'AUCUNE UNITÉ DE COMMANDE OU UNE COMMANDE PARTICULIÈRE. IL EST PARFAITEMENT INTÉGRÉ DANS LES SYSTÈMES GAINABLES NOUVEAUX ET EXISTANTS DANS LESQUELS VOUS SOUHAITEZ GÉRER UNE PARTIE UNIQUE DU SYSTÈME GAINABLE : CETTE SOLUTION NE NÉCESSITE PAS L'INSTALLATION D'AUCUN SYSTÈME GÉRANT L'ALLUMAGE / L'ARRÊT DU MOTEUR DE BY-PASS INTERNE. IL PERMET DONC LA GESTION DU FLUX D'AIR DANS LES PIÈCES INDIVIDUELLES SANS L'AIDE DE LA CENTRALE ÉLECTRONIQUE POUR LE FONCTIONNEMENT. LES AILETTES ÉQUIPÉES DE JOINT EN CAOUTCHOUC GARANTISSENT L'ÉTANCHÉITÉ AU PASSAGE DE L'AIR AVEC L'ÉVENT FERMÉ ET ÉVITENT LE BRUIT.

WEISSE MOTORISIERTE ZULUFTÖFFNUNG

DIE MOTORISIERTE DÜSE KANN IN NEUEN UND VORHANDENEN KANALSYSTEMEN VERWENDET WERDEN. DER BETRIEB DER DÜSE ERFOLGT OHNE HILFE EINER STEUEREINHEIT ODER EINES BESTIMMTEN BEFEHLS. ES IST PERFEKT IN NEUE UND BESTEHENDE KANALSYSTEME INTEGRIERT, IN DENEN SIE NUR EINEN TEIL DES KANALSYSTEMS VERWALTEN MÖCHTEN: DIESE LÖSUNG ERFORDERT KEINE INSTALLATION EINES SYSTEMS, DAS DIE ZÜNDUNG / ABSCHALTUNG DES INTERNEN BYPASS-MOTORS VERWALTET. ES ERLAUBT DAHER DIE STEUERUNG DES LUFTSTROMS IN DEN EINZELNEN RÄUMEN OHNE HILFE DER ELEKTRONISCHEN STEUEREINHEIT FÜR DEN BETRIEB.
DIE MIT GUMMIDICHTUNGEN AUSGESTATTETEN FLATTEN GARANTIEREN DIE ABDICHTUNG DES LUFTDURCHGANGS BEI GESCHLOSSENER LÜFTUNG UND VERMEIDEN GERÄUSCHE.

THE NOZZLE CAN BE ADJUSTED INTO FOUR POSITIONS:

25%	1/4	
50%	2/4	
75%	3/4	
100%	4/4 MAXIMUM OPENING	

Installation example



Nr. 1 white Vega Point motorised delivery nozzle Vega Point



1 on / off switch

VEGA POINT

CE MADE IN ITALY

WHITE MOTORISED DELIVERY NOZZLE

For point system

TECHNICAL SPECIFICATIONS

- WHITE PAINTED ALUMINIUM
- POWER SUPPLY INCLUDED ("MASTER" VERSION)
- "SLAVE" VERSION WITHOUT REMOTE CONTROL AND POWER SUPPLY
- AUXILIARY OUT CONTACT
- POWER SUPPLY 220 V
- MAX CONVEYANCE LENGTH 25 M
- A MAXIMUM OF 8 DELIVERY NOZZLES CAN BE INSTALLED IN DUCTING

GRILLE DE REFOULEMENT MOTORISÉE BLANCHE

pour système ponctuel

CARACTÉRISTIQUES TECHNIQUES

- ALUMINIUM PEINT EN BLANC
- ALIMENTATION INCLUS (VERSION "MASTER")
- VERSION "SLAVE" SANS TÉLÉCOMMANDE NI ALIMENTATION
- CONTACT AUXILIAIRE SORTIE
- ALIMENTATION 220 V
- LONGUEUR MAXIMALE DE LA CATÉNAIRE 25 M
- 8 BUSES MAX. PEUVENT ÊTRE INSTALLÉES DANS LA CATÉNAIRE


WEISSE MOTORISIERTE ZULUFTÖFFNUNG


für point System

TECHNISCHE EIGENSCHAFTEN

- WEISS LACKIERTES ALUMINIUM
- STROMVERSORGUNG IM LIEFERUMFANG ENTHALTEN ("MASTER" -VERSION)
- "SLAVE"-VERSION OHNE FERNBEDIENUNG UND STROMVERSORGUNG
- HILFSKONTAKT OUT
- STROMVERSORGUNG 220 V
- MAX. KETTENLINIENLÄNGE 25 M
- ES KÖNNEN MAXIMAL 8 LUFTGITTER IN DER KETTENLINIE INSTALLIERT WERDEN

AIR FLOW DIAGRAM

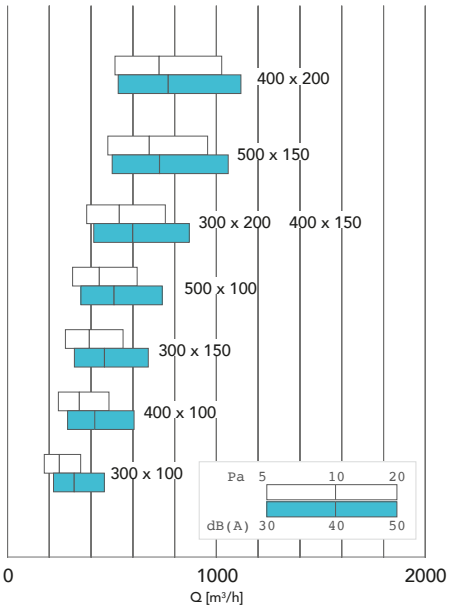

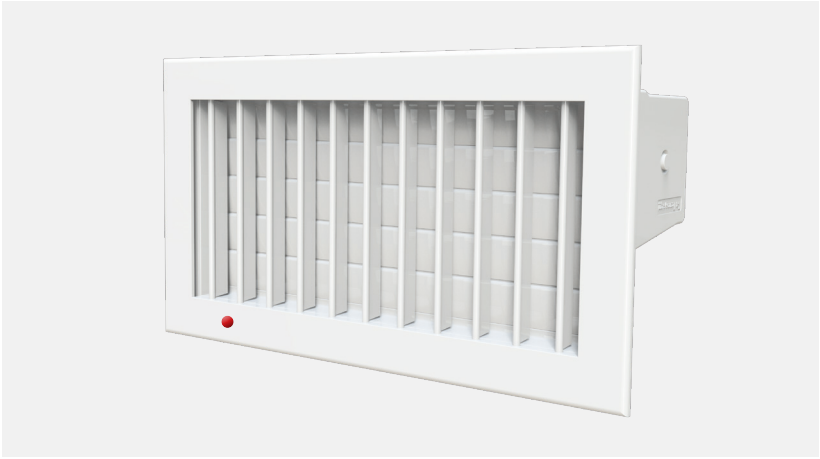




BUILT-IN POWER SUPPLY


For connection cable for grilles "master" e "slave" see pag. 21

Datasheet

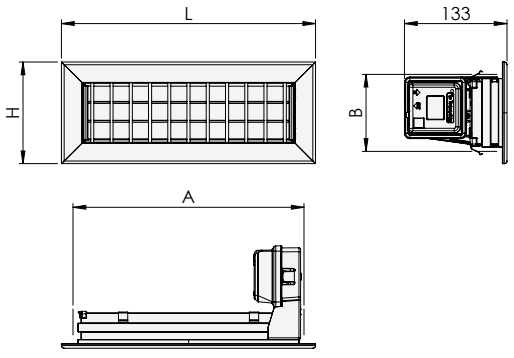


CODE	DIMENSIONS [mm]			
	L	H	A	B
GAD200027	332	132	300	150
GAD200028	332	182	300	100
GAD200029	332	232	300	200
GAD200030	332	232	400	100
GAD200031	432	182	400	150
GAD200032	432	232	400	200
GAD200033	532	132	500	100
GAD200034	532	182	500	150


CONNECTION WIRING DIAGRAM

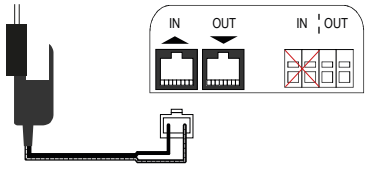


EXAMPLE OF INSTALLATION 2 GRILLES

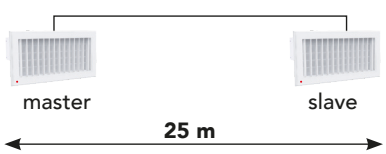

EXAMPLE OF INSTALLATION 4 GRILLES

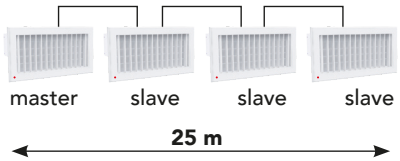

MAX 8 GRILLES

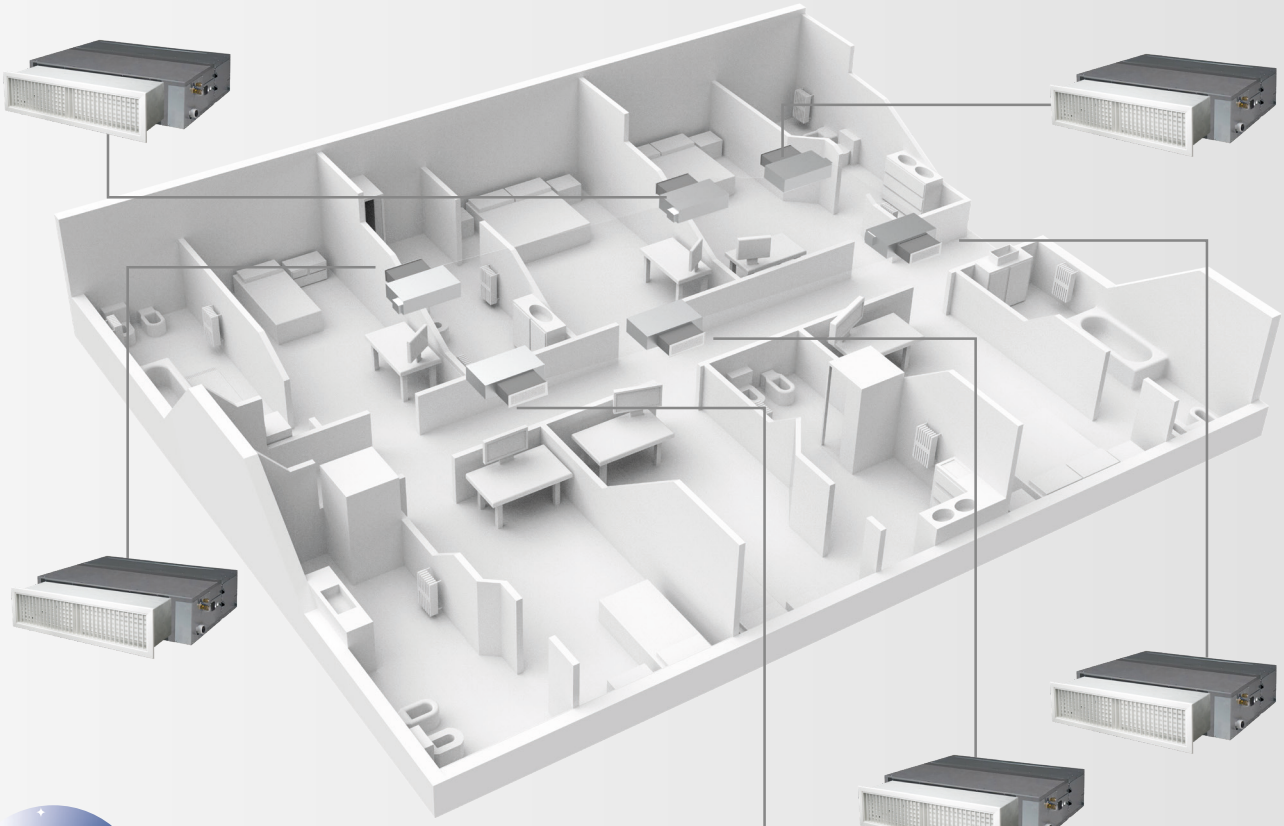

STAR point

WHITE PAINTED MOTORISED DELIVERY NOZZLE

with or without telescopic plenum
for low-prevalence ducted units

THE STAR DELIVERY NOZZLE IS DESIGNED TO MEET THE FUNCTIONAL AND AESTHETIC NEEDS IN THE INSTALLATIONS OF LOW-PREVALENCE INDOOR UNITS.
THE STAR DELIVERY NOZZLE OPENS WHEN THE MACHINE IS SWITCHED ON AND CLOSES WHEN IT IS SWITCHED OFF, WITHOUT HAVING TO MAKE ELECTRICAL CONNECTIONS BETWEEN THE MACHINE AND THE NOZZLE ITSELF.
IDEAL FOR HOTELS, HOTELS, RESTAURANTS, ETC.

GRILLE DE REFOULEMENT MOTORISÉE PEINTE EN BLANC

avec ou sans plénum télescopique pour
unité canalisée à faible prévalence


LA GRILLE DE DISTRIBUTION STAR EST CONÇUE POUR RÉPONDRE AUX BESOINS FONCTIONNELS ET ESTHÉTIQUES DANS LES INSTALLATIONS D'UNITÉS INTÉRIEURES À FAIBLE PRÉVALENCE.
LA GRILLE DE DISTRIBUTION STAR S'OUVRE LORSQUE LA MACHINE EST ALLUMÉE ET SE FERME LORSQU'ELLE EST ÉTEINTE, SANS AVOIR À ÉTABLIR DE CONNEXIONS ÉLECTRIQUES ENTRE LA MACHINE ET LA GRILLE.
IDÉAL POUR LES HÔTELS, LES RESTAURANTS, ETC.

WEISS LACKIERTE MOTORISIERTE ZULUFTÖFFNUNG

mit oder ohne teleskopischem Plenum
für das Leitungssystem

DIE STAR ABGABEDÜSE IST SO KONZIPIERT, DASS SIE DIE FUNKTIONALEN UND ÄSTHETISCHEN ANFORDERUNGEN BEI DER INSTALLATION VON INNENEINHEITEN MIT NIEDRIGER FÖRDERHÖHE ERFÜLLT.
DIE STAR ABGABEDÜSE ÖFFNET BEI EINGESCHALTETER MASCHINE UND SCHLIESST BEI AUSGESCHALTETER MASCHINE, OHNE ELEKTRISCHE VERBINDUNGEN ZWISCHEN DER MASCHINE UND DER DÜSE SELBST HERSTELLEN ZU MÜSSEN. IDEAL FÜR PENSIONEN, HOTELS, RESTAURANTS USW.

WHEN ON WORKING THE GRILLE STAY OPENED

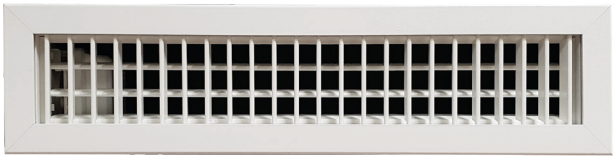

THE GRILLE CLOSES WHEN THE UNIT TURNED OFF



- FROM NOW ON NO MORE OPEN FINS ON YOUR AIR CONDITIONING UNIT.
- "STAR POINT" WILL MAKE YOUR AIR CONDITIONING SYSTEM MORE ATTRACTIVE. NOW THE STAR POINT SYSTEM AUTOMATICALLY CLOSES THE OUTLET WHEN THE UNIT IS TURNED OFF.
- OPEN AUTOMATICALLY WHEN YOU TURN THE AIR CONDITIONING UNIT ON

STAR POINT

MADE IN ITALY

WHITE PAINTED MOTORISED DELIVERY NOZZLE

with or without telescopic plenum for low-prevalence ducted units

TECHNICAL SPECIFICATIONS

- WHITE PAINTED ALUMINIUM
- AUTOMATIC OPENING IN PRESENCE OF AIR FLOW, AUTOMATIC CLOSURE IN ABSENCE OF AIR FLOW
- POWER SUPPLY 220 V
- BUILT-IN POWER SUPPLY INCLUDED

GRILLE DE REFOULEMENT MOTORISÉE PEINTE EN BLANC

avec ou sans plénum télescopique pour unité canalisée à faible prévalence

CARACTÉRISTIQUES TECHNIQUES


- ALUMINIUM PEINT EN BLANC
- OUVERTURE AUTOMATIQUE EN PRÉSENCE DE DÉBIT D'AIR, FERMETURE AUTOMATIQUE EN L'ABSENCE DE DÉBIT D'AIR
- ALIMENTATION 220 V
- BLOC D'ALIMENTATION INTÉGRÉ INCLUS

WEISS LACKIERTE MOTORISIERTE ZULUFTÖFFNUNG

mit oder ohne teleskopischem Plenum für das Leitungssystem

TECHNISCHE EIGENSCHAFTEN

- WEISS LACKIERTES ALUMINIUM
- AUTOMATISCHES ÖFFNEN BEI VORHANDENSEIN EINES LUFTSTROMS, AUTOMATISCHES SCHLIESSEN BEI NICHTVORHANDENSEIN EINES LUFTSTROMS
- STROMVERSORGUNG 220 V
- INTEGRIERTES NETZTEIL IM LIEFERUMFANG ENTHALTEN

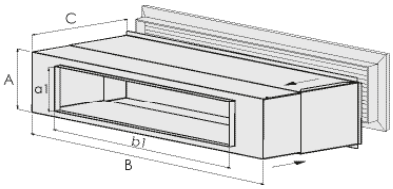



BUILT-IN POWER SUPPLY



CODE	ELECTRIC SUPPLY GRILLE		TELESCOPIC PLENUM				
	EXTERNAL FRAME	HOLE INSTALLATION SIZE	HEIGHT PLENUM	WIDTH PLENUM	DEPTH MIN-MAX	HEIGHT OF WINDOW CONNECTION UNITS	WIDTH OF THE WINDOW CONNECTION UNITS
	[mm]	[mm]	A [mm]	B [mm]	C [mm]	a1 [mm]	b1 [mm]
GAD200021	732X182	700X150	140	690	285-430	MAX 135	MAX 685
GAD200022	932X182	900X150	140	890	285-430	MAX 135	MAX 885
GAD200023	932X232	900X200	190	890	285-430	MAX 185	MAX 885

WHITE PAINTED MOTORISED DELIVERY NOZZLE

with telescopic plenum for low-prevalence ducted units

TECHNICAL SPECIFICATIONS

- WHITE PAINTED ALUMINIUM
- AUTOMATIC OPENING IN PRESENCE OF AIR FLOW, AUTOMATIC CLOSURE IN ABSENCE OF AIR FLOW
- POWER SUPPLY 220 V
- BUILT-IN POWER SUPPLY INCLUDED

GRILLE DE REFOULEMENT MOTORISÉE PEINTE EN BLANC

avec plénum télescopique pour unité canalisée à faible prévalence

CARACTÉRISTIQUES TECHNIQUES

- ALUMINIUM PEINT EN BLANC
- OUVERTURE AUTOMATIQUE EN PRÉSENCE DE DÉBIT D'AIR, FERMETURE AUTOMATIQUE EN L'ABSENCE DE DÉBIT D'AIR
- ALIMENTATION 220 V
- BLOC D'ALIMENTATION INTÉGRÉ INCLUS

WEISS LACKIERTE MOTORISIERTE ZULUFTÖFFNUNG

mit teleskopischem Plenum für das Leitungssystem

TECHNISCHE EIGENSCHAFTEN

- WEISS LACKIERTES ALUMINIUM
- AUTOMATISCHES ÖFFNEN BEI VORHANDENSEIN EINES LUFTSTROMS, AUTOMATISCHES SCHLIESSEN BEI NICHTVORHANDENSEIN EINES LUFTSTROMS
- STROMVERSORGUNG 220 V
- INTEGRIERTES NETZTEIL IM LIEFERUMFANG ENTHALTEN



BUILT-IN POWER SUPPLY



CODE	DESCRIPTION	ELECTRIC SUPPLY GRILLE	
		EXTERNAL FRAME	HOLE INSTALLATION SIZE
		[mm]	[mm]
GAD200024	STAR POINT" WHITE PAINTED MOTORISED DELIVERY NOZZLE FOR LOW-PREVALENCE DUCTED UNITS 700x150	732X182	700X150
GAD200025	STAR POINT" WHITE PAINTED MOTORISED DELIVERY NOZZLE FOR LOW-PREVALENCE DUCTED UNITS 900x150	932X182	900X150
GAD200026	STAR POINT" WHITE PAINTED MOTORISED DELIVERY NOZZLE FOR LOW-PREVALENCE DUCTED UNITS 900x200	932X232	900X200

Datasheet

NEW CATALOG 2024
FOR SPARE PARTS



Scan the QR Code and leaf through our catalog for spare parts