

DATASHEET

rev. 01 - 14/03/2023


Plenum isolato con attacco superiore predisposto con ingressi post/lat per diffusore lineare 4 feritoie

PWD300185 - PWD300186 - PWD300187
PWD300188 - PWD300189



TECHNICAL SPECIFICATIONS:

- Made of insulated galvanised sheet metal
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars for upper coupling supplied
- Collars for rear and side inlets available on request (see combinations in table)
- Diffuser fastening brackets and hardware kit supplied

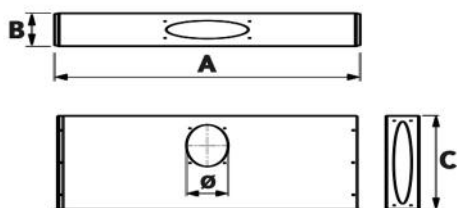

DIMENSIONS

CODE	DIMENSIONS A [mm]	DIMENSIONS B [mm]	DIMENSIONS C [mm]	NO. OF UPPER COLLARS SUPPLIED / MOD.	BACK COLLAR ON REQUEST / MOD.	SIDE COLLAR ON REQUEST / MOD.
PWD300185	630	180	280	1 pc. / E5 (Ø200-150)	1 pc. / C3 (OVAL Ø200-150)	
PWD300186	830	180	280	1 pc. / E5 (Ø200-150)	1 pc. / C3 (OVAL Ø200-150)	
PWD300187	1030	180	280	2 pc. / E5 (Ø200-150)	2 pc. / C3 (OVAL Ø200-150)	
PWD300188	1530	180	280	2 pc. / E5 (Ø200-150)	2 pc. / C3 (OVAL Ø200-150)	
PWD300189	2040	180	280	2 pc. / E5 (Ø200-150)	2 pc. / C3 (OVAL Ø200-150)	

ITEMS

CODE	DESCRIPTION
PWD300185	ISOLATED PLENUM WITH TOP CONNECTION FOR 4-SLOT LINEAR DIFFUSERS L.600
PWD300186	ISOLATED PLENUM WITH TOP CONNECTION FOR 4-SLOT LINEAR DIFFUSERS L.800
PWD300187	ISOLATED PLENUM WITH TOP CONNECTION FOR 4-SLOT LINEAR DIFFUSERS L.1000
PWD300188	ISOLATED PLENUM WITH TOP CONNECTION FOR 4-SLOT LINEAR DIFFUSERS L.1500
PWD300189	ISOLATED PLENUM WITH TOP CONNECTION FOR 4-SLOT LINEAR DIFFUSERS L.2000