

## SMART FLOW - SF 20 - 30 - 40 It

condensate collection pump

12170105 - 12170106 - 12170107



### TECHNICAL SPECIFICATIONS:

- Power supply 230V - 50Hz
- Alarm contact C-NO 6A
- Protection rating IP X7
- Connection pipe Ø internal 4 mm, external Ø 6 mm
- Pump dimensions 143 x 76 x 62.3 mm

### PACK COMPLETE WITH


- 1 pump body
- 1 sheet of instructions

### COMBINATIONS WITH CONDENSATE DRAIN PIPES:

Connection hose for SMART FLOW-SF pump 20 Ø 4 x 6 mm

Connection hose for SMART FLOW-SF pump 30-40 Ø 6 x 9.25 mm

### SMART FLOW - SF 20 It

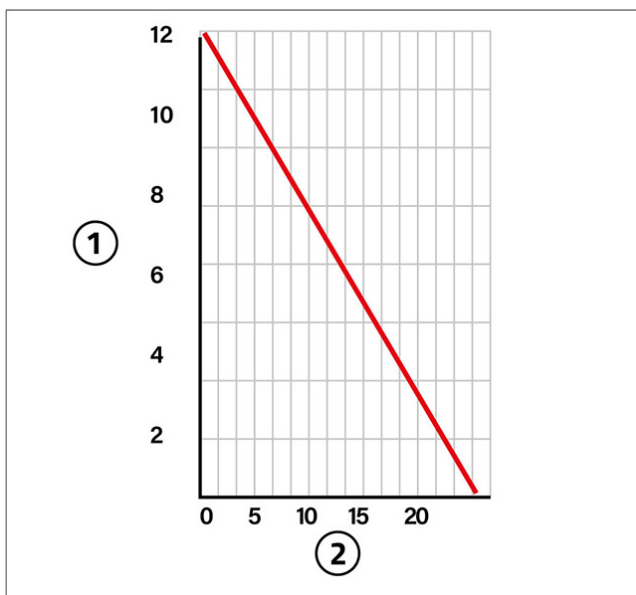


[1] Air delivery (vertical m)

[2] Flow rate (litres/hour)

- Flow rate 20 l/h for unit up to 20 kW
- Max. 12 m vertical delivery
- Power consumption 19 W
- Max. noise level 29 [dB (A)]
- Pipe dimensions Ø 4 x 6 mm


## SMART FLOW - SF 30 It

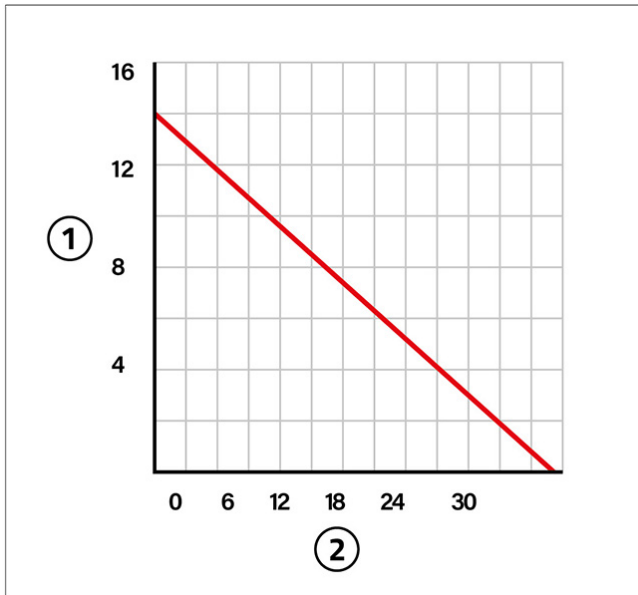

[1] Air delivery (vertical m)  
[2] Flow rate (litres/hour)

- Flow rate 30 l/h for unit up to 30 kW
- Max. 14 m vertical delivery
- Power consumption 25 W
- Max noise level 50 [dB(A)]
- Pipe dimensions  $\varnothing$  6 x 9,5 mm

## SMART FLOW - SF 40 It

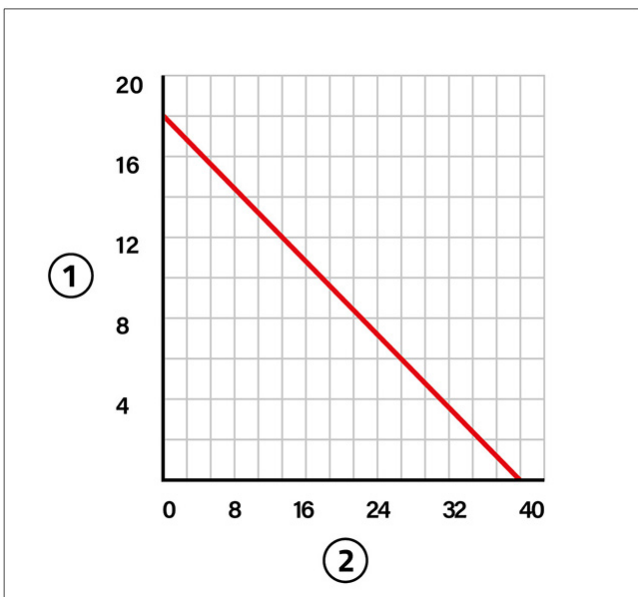

[1] Air delivery (vertical m)  
[2] Flow rate (litres/hour)

- Flow rate 40 l/h for unit up to 40 kW
- Max. 18 m vertical delivery
- Power consumption 27 W
- Max noise level 53 [dB(A)]
- Pipe dimensions  $\varnothing$  6 x 9,5 mm

## ASSEMBLY APPLICATIONS

- column air conditioners
- refrigerated cabinets
- refrigerated cabinets
- fridge counters
- evaporators
- ceiling-mounted air conditioners

## ITEMS

CODE	DESCRIPTION
12170105	SMART FLOW-SF 20 LT. CONDENSATE COLLECTION PUMP
12170106	SMART FLOW-SF 30 LT. CONDENSATE COLLECTION PUMP
12170107	SMART FLOW-SF 40 LT. CONDENSATE COLLECTION PUMP