

## SBR EXTREME 100-8


SBR EXTREME 100-8 vulcanised rubber vibration-resistant floor base

11105060 - SCD500237 - SCD500238  
11105066 - 11105068



### TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with nut, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

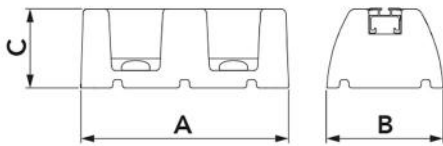

### DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	LOAD CAPACITY [kg]
11105060	250	140	95	200
SCD500237	450	140	95	300
SCD500238	600	140	95	500
11105066	1000	140	95	650
11105068	1200	140	95	750

## ITEMS

CODE	DESCRIPTION
11105060	SBR "EXTREME-8" 250 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
SCD500237	SBR "EXTREME-8" 450 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
SCD500238	SBR "EXTREME-8" 600 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
11105066	SBR "EXTREME-8" 1000 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
11105068	SBR "EXTREME-8" 1200 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8