

# DATASHEET

rev. 0 - 02/11/2023

## SBR EXTREME 100-A

SBR EXTREME 100-8 vulcanised rubber  
vibration-resistant floor base


11105059 - SCD500245 - SCD500246

11105071 - 11105072



### TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- Built-in spirit level
- Non-slip, water-draining resting base in armed body
- Self-tapping screws supplied
- Direct fastening of the screws on the support
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

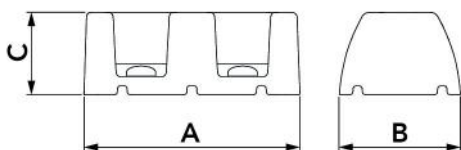

### DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]
11105059	250	140	95
SCD500245	450	140	95
SCD500246	600	140	95
11105071	1000	140	95
11105072	1200	140	95

## EXAMPLE OF INSTALLATION:



## TECHNICAL DATA

CODE	LOAD CAPACITY [kg]
11105059	200
SCD500245	300
SCD500246	500
11105071	650
11105072	750

## ITEMS

CODE	DESCRIPTION
11105059	SBR "EXTREME-A" 250 - FOOT MOUNT W/O ALU PROFILE
SCD500245	SBR "EXTREME-A" 450 - FOOT MOUNT W/O ALU PROFILE
SCD500246	SBR "EXTREME-A" 600 - FOOT MOUNT W/O ALU PROFILE
11105071	SBR "EXTREME-A" 1000 - FOOT MOUNT W/O ALU PROFILE
11105072	SBR "EXTREME-A" 1200 - FOOT MOUNT W/O ALU PROFILE