

OPTIMA DT CLEAN

“T” shunt, white CLEAN

- cod. SCD100547 - cod. SCD100533 - cod. SCD100534
- cod. SCD100535



TECHNICAL SPECIFICATIONS:

- Rigid shockproof PVC, anti-UVA, white, can be recycled
- Innovative design
- Ultra-fast interlocking fastening system
- Extremely high outer finish
- Allows a wide bending radius of tubes
- Heat shrink barcode packaging
- Paintable
- Operating temperature -20°C / +60°C

MODELS AVAILABLE:



WHITE


SPECIFICATIONS

DT 62-OPT ECO consisting of: DT 75-OPT ECO and 3 reductions for ducts, size 62

DT 75-OPT ECO consisting of a “T”, size 75

DT 102-OPT ECO consisting of a “T”, size 102

DT 135-OPT ECO consisting of a "T", size 135

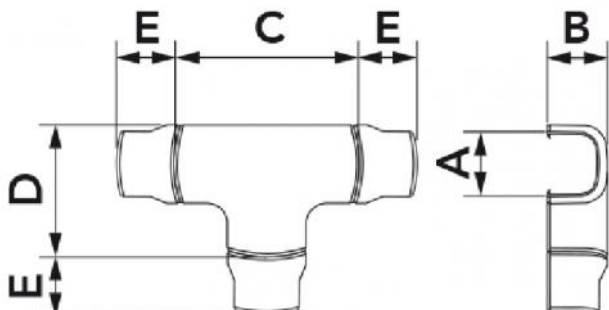

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
SCD100547	DT 62 - OPT CLEAN	66	48	180	130	60
SCD100533	DT 75 - OPT CLEAN	78	58	180	130	--
SCD100534	DT 102 - OPT CLEAN	104	68	210	160	--
SCD100535	DT 135 - OPT CLEAN	140	84	270	205	--

ITEMS

CODE	DESCRIPTION
SCD100547	T-Shunt OPTIMA DT DT62 - OPT ECO
SCD100533	"OPTIMA DT" LINE T-BRANCH - DT75-OPT - OPT CLEAN
SCD100534	"OPTIMA DT" LINE T-BRANCH - DT102-OPT - OPT CLEAN
SCD100535	"OPTIMA DT" LINE T-BRANCH - DT135-OPT - OPT CLEAN

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.