

RFE - opt

universal finish flange


- cod. N11122000




TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA and recyclable PVC
- Made of 2 interlocking pieces
- Outer flange hole cover
- High finish for holes from Ø 62 to Ø 100 mm
- Rear springs supplied
- Heat shrink barcode packaging
- Paintable
- Operating temperature -20°C / +60°C

DIMENSIONS

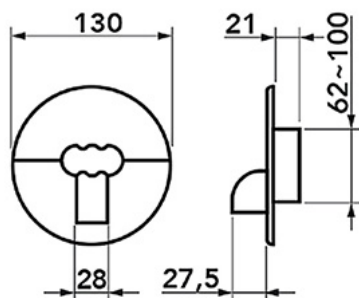

EXAMPLE OF INSTALLATION:

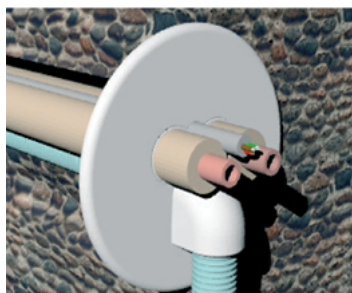

ITEMS

CODE	DESCRIPTION
N11122000	"RFE" UNIVERSAL WALL FLANGE - NEW LINE - RFE

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.