

# DATASHEET


rev. 00 - 20/10/2022



## DE.CS25

dehumidifier for ductable ceiling

30200010

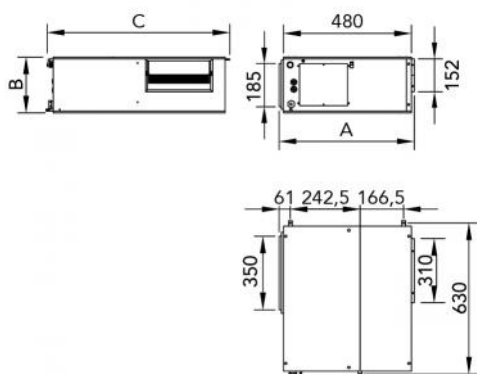

### DIMENSIONS

CODE	HEIGHT A [mm]	WIDTH B [mm]	DEPTH C [mm]
30200010	249	525	650

## TECHNICAL DATA

SPECIFICATIONS	DATA
CONDENSING HUMIDITY (26° - 65%) [l/day]	24
Power consumption [W]	290
Power supply [V]	230
Power supply [Ph]	1
Power supply [Hz]	50
Max power absorbed [W]	340
Water flow rate (15°C) [l/h]	240
CHILLER POWER CONSUMPTION [W]	830
Load loss [kPa]	5
Air flow rate [m³/h]	250
Max. head (VEL.3) [Pa]	60
Mean head (VEL.2) [Pa]	40
Low head (VEL.1) [Pa]	10
Refrigerant (R134a) [gr]	200
SOUND POWER LEVEL [dB(A)]	41
Sound pressure level [dB(A)]	33

## ITEMS

CODE	DESCRIPTION
30200010	FALSE-CEILING-DUCTED DEHUMIDIFIER UNIT "DE.CS25"