


DATASHEET

rev. 00 - 5/11/2022


Insulated plenum with upper coupler for linear diffuser with rotary deflector 2 slots

PWD400347 - PWD400348 - PWD400349
PWD400350 - PWD400351

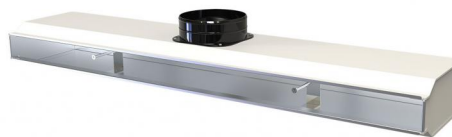

TECHNICAL SPECIFICATIONS:

- Made of insulated galvanised sheet metal
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars supplied
- Screw kit for fastening the supplied linear diffuser

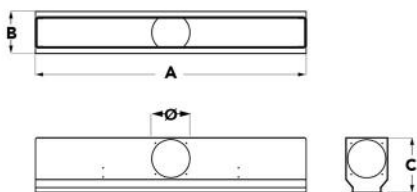

DIMENSIONS

CODE	DIMENSION A [mm]	DIMENSION B [mm]	DIMENSION C [mm]	NO. OF UPPER COLLARS SUPPLIED / MOD.
PWD400347	630	165	215	1 pc. / E5 (Ø150)
PWD400348	830	165	215	1 pc. / E5 (Ø150)
PWD400349	1030	165	215	1 pc. / E5 (Ø150)
PWD400350	1530	165	215	1 pc. / E5 (Ø150)
PWD400351	2030	165	215	2 pc. / E5 (Ø150)

ITEMS

CODE	DESCRIPTION
PWD400347	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.600
PWD400348	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.800
PWD400349	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.1000
PWD400350	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.1500
PWD400351	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.2000