

DATASHEET

rev. 00 - 5/11/2022


Isolated plenum with upper coupler
provided with rear/side inputs for linear
diffuser 3 slots

PWD300180 - PWD300181 - PWD300182
PWD300183 - PWD300184



TECHNICAL SPECIFICATIONS:

- Made of insulated galvanised sheet metal
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars for upper coupling supplied
- Collars for rear and side inlets available on request (see combinations in table)
- Diffuser fastening brackets and hardware kit supplied

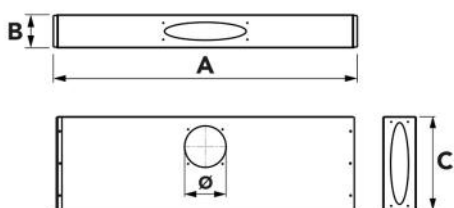

DIMENSIONS

CODE	DIMENSIONS A [mm]	DIMENSIONS B [mm]	DIMENSIONS C [mm]	NO. OF UPPER COLLARS SUPPLIED / MOD.	BACK COLLAR ON REQUEST / MOD.	SIDE COLLAR ON REQUEST / MOD.
PWD300180	630	145	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)	
PWD300181	830	145	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)	
PWD300182	1030	145	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)	
PWD300183	1530	145	280	2 pc. / E5 (Ø150)	2 pc. / C3 (OVAL Ø150-125)	
PWD300184	2030	145	280	2 pc. / E5 (Ø150)	2 pc. / C3 (OVAL Ø150-125)	

ITEMS

CODE	DESCRIPTION
PWD300180	ISOLATED PLENUM WITH TOP CONNECTION FOR 3-SLOT LINEAR DIFFUSERS L.600
PWD300181	ISOLATED PLENUM WITH TOP CONNECTION FOR 3-SLOT LINEAR DIFFUSERS L.800
PWD300182	ISOLATED PLENUM WITH TOP CONNECTION FOR 3-SLOT LINEAR DIFFUSERS L.1000
PWD300183	ISOLATED PLENUM WITH TOP CONNECTION FOR 3-SLOT LINEAR DIFFUSERS L.1500
PWD300184	ISOLATED PLENUM WITH TOP CONNECTION FOR 3-SLOT LINEAR DIFFUSERS L.2000