

OPTIMA MRD

right rotation sleeve

SCD100095 - SCD100129 - SCD100096
SCD100166 - SCD100219



TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA PVC, white or grey, recyclable
- Innovative design
- Ultra-fast interlocking fastening system
- Extremely high outer finish
- Heat shrink barcode packaging
- Paintable
- Operating temperature -20°C / + 60°C

SPECIFICATIONS

MRD 62-OPT composed of: MRD 75-OPT and no. 2 reductions for ducts sized 62
MRD 75-OPT composed of RH rotation sleeve sized 75


MODELS AVAILABLE:



WHITE RAL 9010



GREY
ANTRACITE RAL
7016

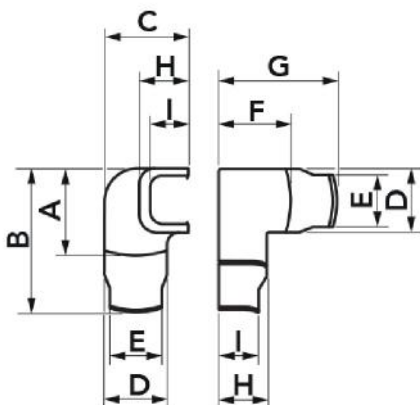

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]
SCD100095	MRD 62 - OPT	119	174	102	78	66	87	143	58	48
SCD100129	MRD 62 - OPT	103	--	86	64	--	78	--	49	--
SCD100096	MRD 75 - OPT	119	--	102	78	--	87	--	58	--
SCD100166	MRD 75 - OPT	119	--	102	78	--	87	--	58	--
SCD100219	MRD 75 - OPT	119	--	102	78	--	87	--	58	--

ITEMS

CODE	DESCRIPTION
SCD100095	MRD62-OPT - "OPTIMA MRD" RIGHT ROTATION COUPLING - REDUCED
SCD100129	MRD62-OPT - "OPTIMA MRD" RIGHT ROTATION COUPLING
SCD100096	MRD75-OPT - "OPTIMA MRD" RIGHT ROTATION COUPLING
SCD100166	"OPTIMA MRD" RIGHT ROTATION COUPLING - ANTHRACITE GREY Mod. MRD75-OPT
SCD100219	"OPTIMA MRD" RIGHT ROTATION COUPLING - BLACK - RAL 9005 - MRD75-OPT