

DATASHEET

rev. 00 - 10/11/2022

RTQ


rectangular round reducer

11161376 - 11161376B



TECHNICAL SPECIFICATIONS:

- PVC
- Female coupling
- Allows transition from round to rectangular tubes

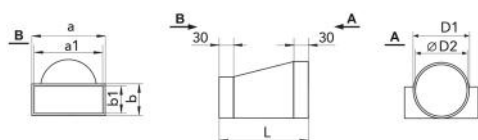


DIMENSIONS

| CODE | a [mm] | a1 [mm] | b [mm] | b1 [mm] | D1 [mm] | D2 [mm] | L [mm] |
|-----------|--------|---------|--------|---------|---------|---------|--------|
| 11161376 | 124 | 122 | 64 | 60 | 103 | 100 | 137 |
| 11161376B | 208 | 204 | 64 | 60 | 128 | 125 | 140 |

APPLICATIONS

- Supply and ventilation of exhaust for various rooms
- Direct connection of round and flat pipes.
- Operating temperature -30°C to +70°C
- Use of the MDG coupling sleeve is required for connection with a circular pipe

DATA RELATIVE TO AN AIR DUCT SECTION OF 1 m

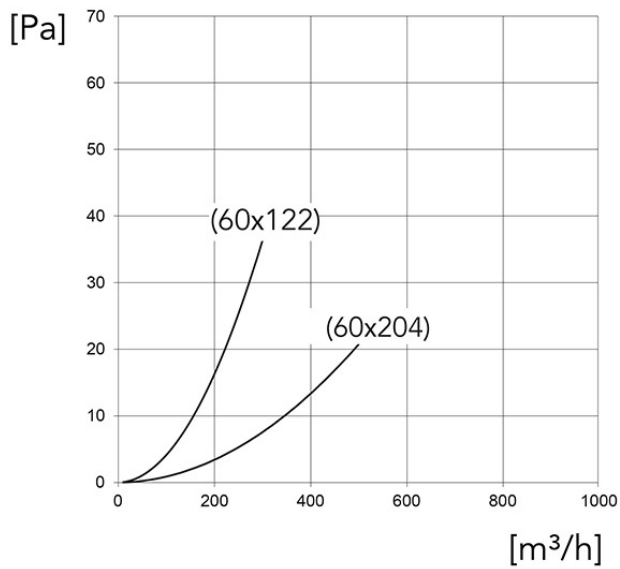

ITEMS

| CODE | DESCRIPTION |
|-----------|-----------------------------------|
| 11161376 | ROUND TO SQUARE REDUCER "RTQ" 100 |
| 11161376B | ROUND TO SQUARE REDUCER "RTQ" 125 |