


## TOP LINE

### single insulated copper pipe 50 m

11110514 - 11110538 - 11110512  
 11110558 - SCD600009 - 11110534  
 11110514W - 11110538W - 11110512W

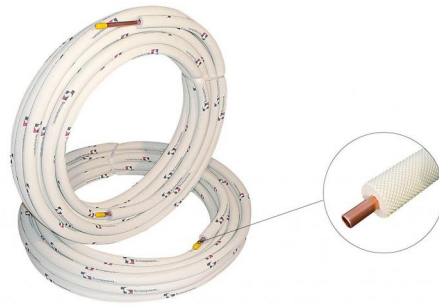

### TECHNICAL SPECIFICATIONS:

- Cu-DHP copper pipe according to EN 12735-1
- Closed-cell polyethylene foam sheath
- Strong tear-resistant ivory-coloured, corrugated and pyramidal outer film
- Insulation sheath thickness 10 mm
- Copper thickness from 0.8 to 1 mm

### TECHNICAL DATA

CODE	Ø	[mm]	COPPER THICKNESS [mm]	SHEATH THICKNESS [mm]
11110514	CU 1/4"	6,35	1	10
11110538	CU 3/8"	9,52	1	10
11110512	CU 1/2"	12,7	1	10
11110558	CU 5/8"	15,88	1	10
SCD600009	CU 7/8"	22,22	1	10
11110534	CU 3/4"	19,05	1	10
11110514W	CU 1/4"	6,35	0,8	10
11110538W	CU 3/8"	9,52	0,8	10
11110512W	CU 1/2"	12,7	0,8	10

### TECHNICAL SPECIFICATIONS OF THE SHEATH

SPECIFICATIONS	TECHNICAL DATA
SHEATH THICKNESS	10 mm
REACTION TO FIRE CLASS (13501-1)	BL - s2, d0
THERMAL CONDUCTIVITY COEFFICIENT (EN 12667)	0.038 W/mK at 10°C - 0.042 W/mK at 40°C
WATER VAPOUR RESISTANCE COEFFICIENT (EN ISO 10456)	μ = 15000
SPECIFIC WEIGHT	30 kg/m <sup>2</sup>
TEMPERATURE OF USE	-80°C + 120°C

## ITEMS

CODE	DESCRIPTION
11110514	* 1/4" SINGLE PRE-INSULATE COPPER PIPE 50 MT TOP-LINE
11110538	* 3/8" SINGLE COPPER PIPE TOP-LINE, 50MT
11110512	* 1/2" SINGLE PRE-INSULATE COPPER PIPE 50 MT TOP-LINE
11110558	SINGLE PRE-INSULATE COPPER PIPE 5/8" - THICK 1 MM - 50 MT -- TOP-LINE
SCD600009	INSULATED COPPER PIPE 7/8"- TOP LINE - Thick 1,0mm - Length 25 mt.
11110534	SINGLE PRE-INSULATE COPPER PIPE 3/4" - THICK 1 MM - 25 MT -- TOP-LINE
11110514W	SINGLE PREINSULATED COPPER PIPES TOP LINE 1/4 - THICK 0,8MM - (50 MT)
11110538W	"TOP LINE" PRE-INSULATED SINGLE COPPER PIPE 3/8" - THICK 0,8mm (50 mt)
11110512W	SINGLE PREINSULATED COPPER PIPES TOP LINE 1/2- THICK 0,8MM - (50 MT)