

DUCT PLUS 180


ductable extractor with side output

11104039



TECHNICAL SPECIFICATIONS:


- Easy installation in false ceiling
- Equipped with 1 ejection hole and 4 intake holes
- Made of electro-galvanised painted sheet metal
- Pipe couplings \varnothing 100 mm
- Operable via switch
- Recommended for extracting air from multiple environments such as kitchens, bathrooms, shops, offices

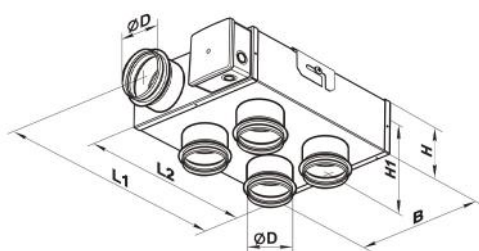

DIMENSIONS

CODE	\varnothing D [mm]	B [mm]	H [mm]	H1 [mm]	L1 [mm]	L2 [mm]	WEIGHT [kg]
11104039	99	260	110	170	302	253	3,4

FLOW RATE DIAGRAM TOTAL CLASS 300

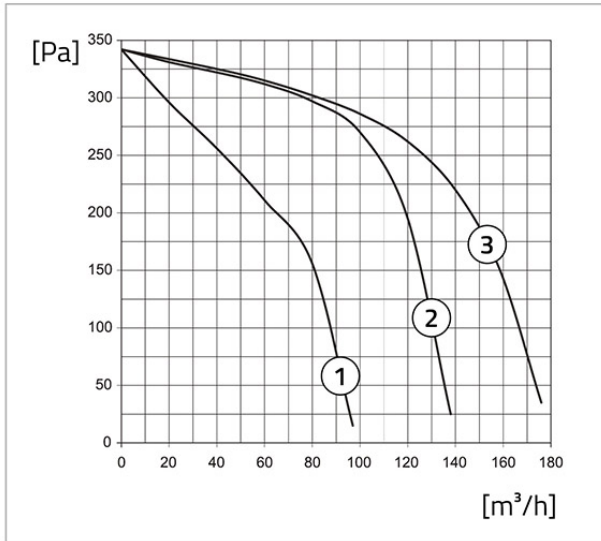

- [1] Speed I
- [2] Speed II
- [3] Speed III

TECHNICAL DATA

MODEL	DUCT PLUS 180		
Speed	min. 1	med. 2	max. 3
Power supply [V]	230	230	230
Power [W]	20	26	45
Absorbed current [A]	0,32	0,34	0,4
Air flow rate [m³/h]	97	138	176
SPEED [RPM]	1400	1800	2600
Max sound level [dB(A)]	33	36	44
Operating temperature max [°C]	50	50	50
Protection rating [IP]	X4		

ITEMS

CODE	DESCRIPTION
11104039	DUCTED EXTRACTOR "DUCT PLUS 180"