

SBR EXTREME 100-20

SBR EXTREME 100-8 vulcanised rubber
vibration-resistant floor base


11105060V - SCD500241 - SCD500242

11105066V - 11105068V



TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with threaded plate, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

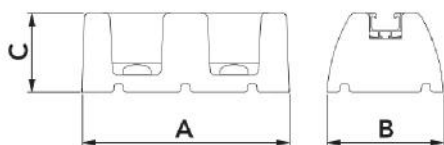

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]
11105060V	250	140	95
SCD500241	450	140	95
SCD500242	600	140	95
11105066V	1000	140	95
11105068V	1200	140	95

TECHNICAL DATA

CODE	LOAD CAPACITY [kg]
11105060V	200
SCD500241	300
SCD500242	500
11105066V	650
11105068V	750

ITEMS

CODE	DESCRIPTION
11105060V	SBR "EXTREME-20" 250 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
SCD500241	SBR "EXTREME-20" 450 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
SCD500242	SBR "EXTREME-20" 600 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105066V	SBR "EXTREME-20" 1000 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105068V	SBR "EXTREME-20" 1200 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8