

DATASHEET

rev. 00 - 16/09/2022

MADE IN ITALY

OPTIMA RL

in-line connection for Excellens and Optima duct

SCD100142 - SCD100143




TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA PVC, white, recyclable
- Innovative design
- Ultra-fast interlocking fastening system
- Large outer flange
- Hole covers
- Extremely high outer finish
- Heat shrink barcode packaging
- Paintable
- Operating temperature -20°C / +60°C

MODELS AVAILABLE:



WHITE RAL 9010

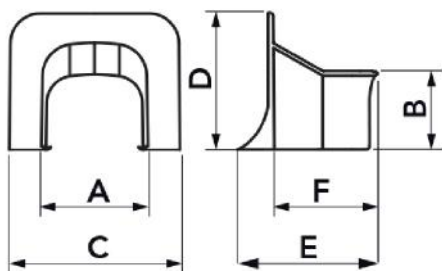

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
SCD100142	RLO 35 - OPT	35	28	52	37		42
SCD100143	RLE 35 - OPT	35	28	52	37	55	

ITEMS

CODE	DESCRIPTION
SCD100142	RLO35-OPT - "OPTIMA RL" LINEAR COUPLING LINE FITTING FOR OPTIMA TRUNKING
SCD100143	RLE35-OPT - "OPTIMA RL" LINEAR COUPLING LINE FITTING FOR EXCELLENS TRUNKING