

DATASHEET

rev. 01 - 16/10/2023


3-way insulated shunt suitable for pipes
from 150 to 450 mm

PWC500007 - PWC500008 - PWC500009
PWC500010 - PWC500011



TECHNICAL SPECIFICATIONS:

- Material: PP
- Insulating coating: polyethylene with aluminium coating
- Operating temperature: 0°C to +70°C
- For flexible heating and air conditioning pipes (insulated or not)
- Available accessories: insulated reducers

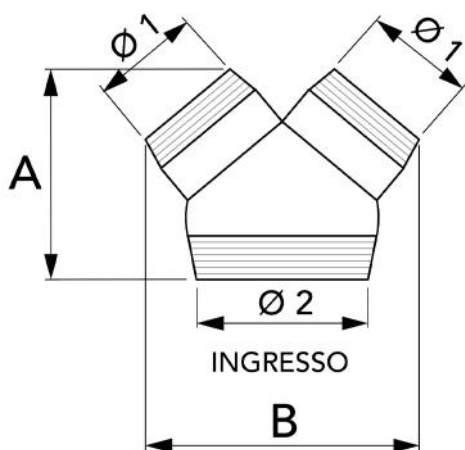

DIMENSIONS

CODE	Ø 2 [mm]	Ø 1 [mm]	A [mm]	B [mm]
PWC500007	200	150	250	345
PWC500008	250	200	300	400
PWC500009	300	250	350	450
PWC500010	350	300	390	500
PWC500011	400	350	445	590

ITEMS

CODE	DESCRIPTION
PWC500007	THREE-WAY INSULATED BRANCH 200 x 150 x 150
PWC500008	THREE-WAY INSULATED BRANCH 250 x 200 x 200
PWC500009	THREE-WAY INSULATED BRANCH 300 x 250 x 250
PWC500010	THREE-WAY INSULATED BRANCH 350 x 300 x 300
PWC500011	THREE-WAY INSULATED BRANCH 400 x 350 x 350