



Insulated plenum with upper coupler for linear diffuser with rotary deflector 2 slots

- cod. PWD400347 - cod. PWD400348 - cod. PWD400349
- cod. PWD400350 - cod. PWD400351

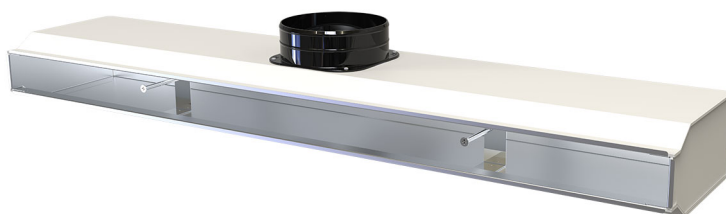

TECHNICAL SPECIFICATIONS:

- Made of insulated galvanised metal sheet
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars supplied
- Screw kit for fastening the supplied linear diffuser

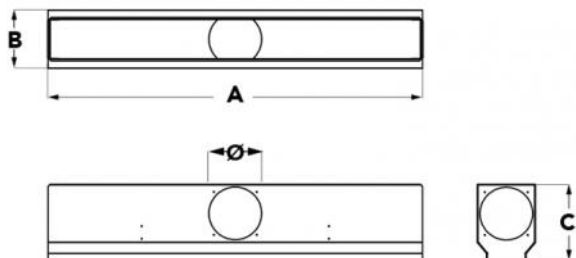

DIMENSIONS

CODE	DIMENSION A [mm]	DIMENSION B [mm]	DIMENSION C [mm]	NO. OF UPPER COLLARS SUPPLIED / MOD.
PWD400347	630	165	215	1 pc. / E5 (Ø150)
PWD400348	830	165	215	1 pc. / E5 (Ø150)
PWD400349	1030	165	215	1 pc. / E5 (Ø150)
PWD400350	1530	165	215	1 pc. / E5 (Ø150)
PWD400351	2030	165	215	2 pc. / E5 (Ø150)

ITEMS

CODE	DESCRIPTION
PWD400347	PLÉNUM ISOLATO CON ATTACCO SUFIORE FOR DIFFUSORE LINEARE CON DEFLETTORE ROTATIVO 2 FERITOIE L.600mm"
PWD400348	PLÉNUM ISOLATO CON ATTACCO SUFIORE FOR DIFFUSORE LINEARE CON DEFLETTORE ROTATIVO 2 FERITOIE L.800mm"
PWD400349	PLÉNUM ISOLATO CON ATTACCO SUFIORE FOR DIFFUSORE LINEARE CON DEFLETTORE ROTATIVO 2 FERITOIE L.1000mm"
PWD400350	PLÉNUM ISOLATO CON ATTACCO SUFIORE FOR DIFFUSORE LINEARE CON DEFLETTORE ROTATIVO 2 FERITOIE L.1500mm"
PWD400351	PLÉNUM ISOLATO CON ATTACCO SUFIORE FOR DIFFUSORE LINEARE CON DEFLETTORE ROTATIVO 2 FERITOIE L.2000mm"

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.