

OPTIMA MRS

left rotation sleeve

- cod. SCD100097 - cod. SCD100130 - cod. SCD100098
- cod. SCD100432 - cod. SCD100392



TECHNICAL SPECIFICATIONS:

- High impact resistance plastic, recyclable
- Innovative design
- Ultra-fast interlocking fastening system
- Extremely high outer finish
- Heat shrink barcode packaging
- Operating temperature -20°C / +60°C
- Coloured operating temperature -20°C / +75°C


MODELS AVAILABLE:



WHITE

SPECIFICATIONS

MRS 62-OPT composed of: MRS 75-OPT and no. 2 reductions for ducts sized 62
MRS 75-OPT composed of RH rotation sleeve sized 75

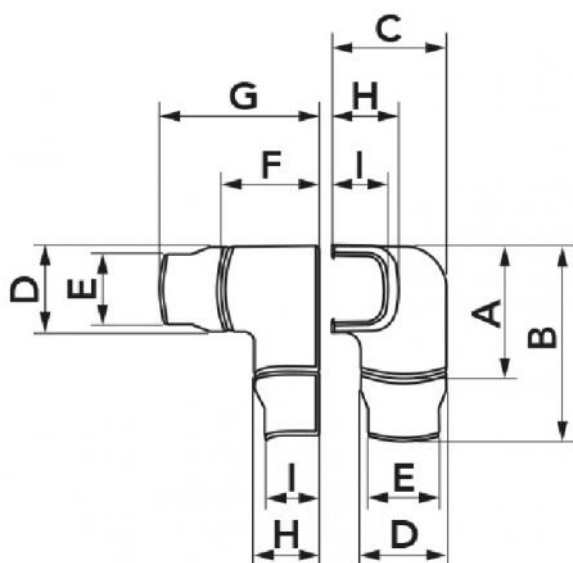

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]
SCD100097	MRS 62 - OPT W	119	174	102	78	66	87	143	58	48
SCD100130	MRS 62 - OPT W	103	--	86	64	--	78	--	49	--
SCD100098	MRS 75 - OPT W	119	--	102	78	--	87	--	58	--
SCD100432	MRS 75 - OPT G	119	--	102	78	--	87	--	58	--
SCD100392	MRS 75 - OPT B	119	--	102	78	--	87	--	58	--

ITEMS

CODE	DESCRIPTION
SCD100097	"OPTIMA MRS" LEFT ROTATION COUPLING - REDUCED - WHITE - MRS62-OPT
SCD100130	OPTIMA MRS LEFT ROTATION COUPLING - WHITE - MRS62-OPT
SCD100098	"OPTIMA MRS" LEFT ROTATION COUPLING - WHITE - MRS75-OPT
SCD100432	"OPTIMA MRS" LEFT ROTATION COUPLING - ANTHRACITE GREY - MRS75-OPT
SCD100392	"OPTIMA MRS" LEFT ROTATION COUPLING - BLACK - MRS75-OPT - MRS75-OPT

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.