
# **FSDRL**

wide base stand with double adjustment for tiled roofs

- cod. FVD300002 - cod. FVD300002BOX

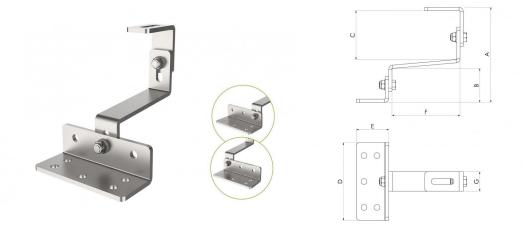

### **DIMENSIONS**

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
FVD300002	145	41 ÷ 52	60 ÷ 80	120	50	105	30
FVD300002B0X	145	41 ÷ 52	60 ÷ 80	120	50	105	30

## **DESCRIPTION**

Wide based AISI 304 stainless steel mount with double adjustment.

The support is designed for fixing photovoltaic systems on tiled roofs, supported by battens of varying thickness.

# **TECHNICAL SPECIFICATIONS**

TECHNICAL SPECIFICATIONS	VALUE		
Material	AISI 304 stainless steel		
Thickness	5 mm		
Weight	760 gr		
Flexural modulus of elasticity	196000 N/mm²		
Tensile breaking load	515 N/mm²		
Holes for roof mounting	5x Ø9		

# **EXAMPLE OF APPLICATION**



Fixing of photovoltaic systems on roofing tiles supported by strips of varying thickness.

### **ITEMS**

FVD300002	FSDRL - SUPPORT WITH WIDE BASE AND DOUBLE ADJUSTMENT
FVD300002B0X	FSDRL - SUPPORT WITH WIDE BASE AND DOUBLE ADJUSTMENT - BOX 10 pcs

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

