

SCHEMA TECNICA

rev. 00 - 29/11/2022


Nipple M / M

26002500 - 26002510 - 26002520
26002530 - 26002540 - 26002550
26002560 - 26002570 - 26002580



CARATTERISTICHE TECNICHE:

- Temperatura massima di utilizzo +130°C
- Applicazione per idraulica
- Filettatura gas

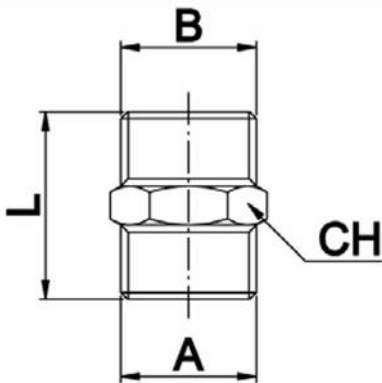

DIMENSIONI

CODICE	A	B	CH	L [mm]
26002500	3/8"		17	27
26002510	1/2"		21	29
26002520	3/4"		26	30
26002530	1"		34	39
26002540	3/8"	1/2"	21	28
26002550	1/2"	3/4"	26	26,5
26002560	3/4"	1"	35	39
26002570	1" 1/4		43,2	44,8
26002580	1" 1/2		48,6	41,8

ARTICOLI

CODICE	DESCRIZIONE
26002500	NIPPLE 3/8" (CONF. 10 PZ.)
26002510	NIPPLE 1/2" (CONF. 10 PZ.)
26002520	NIPPLE 3/4" (CONF. 10 PZ.)
26002530	NIPPLE 1" (CONF. 10 PZ.)
26002540	NIPPLE RIDOTTO 3/8"-1/2" (CONF. 10 PZ.)
26002550	NIPPLE RIDOTTO 1/2"-3/4" (CONF. 10 PZ.)
26002560	NIPPLE RIDOTTO 3/4"-1" (CONF. 10 PZ.)
26002570	NIPPLE 1"1/4 (CONF. 5 PZ.)
26002580	NIPPLE 1"1/2