

SORRISO CLIMA LED-SC 11 LT E SORRISO CLIMA - SC 11 LT

condensate drain sub-split pump

12170100L - 12170100




SORRISO

TECHNICAL SPECIFICATIONS:

- Flow rate 11 l/h for air conditioners up to 10 kW
- Max. 8 m vertical delivery between pump and water outlet
- Transparent tank that can be inspected for routine maintenance
- Power supply 230V - 50Hz
- Alarm contact C-NO 6A
- Power consumption 19 W
- Max noise level 21 [dB(A)]
- Protection rating IP20
- Also available with pump operation LED indicator light
- Pipe dimensions \varnothing 4 x 6 mm
- Pump dimensions W 225 x H 70 x D 60 mm

SORRISO CLIMA 11 LT

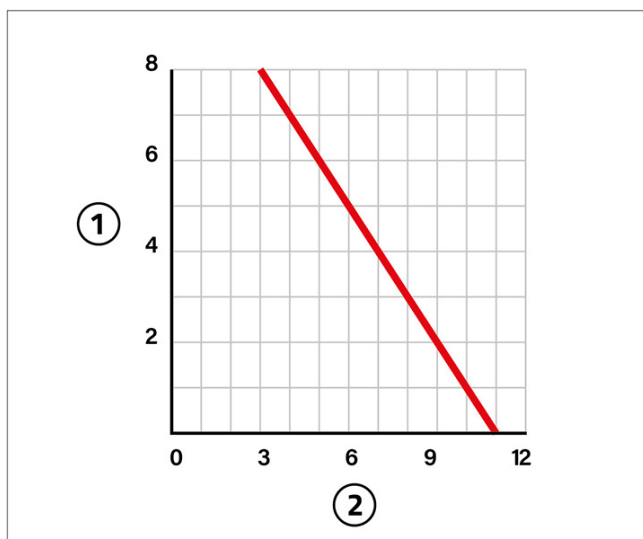

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- For air conditioners up to 10 kW
- Max. 8 m vertical delivery
- Max noise level 21 [dB(A)]

ASSEMBLY APPLICATIONS

- wall-mounted air conditioners
- wall-mounted fan coils

ITEMS

CODE	DESCRIPTION
12170100L	UNDERMOUNT SPLIT CONDENSATE PUMP SORRISO CLIMA LED-SC 11 LT.
12170100	UNDERMOUNT SPLIT CONDENSATE PUMP SORRISO CLIMA-SC 11 LT.