


Distribution box for VMC 90, suitable for 4 - 6 - 8 - 10 - 12 flexible ducted pipe, with sleeves and adjustment damper, for 4 - 6 - 8 - 10

- cod. ACD600137 - cod. ACD600138 - cod. ACD600139
- cod. ACD600140 - cod. ACD600141 - cod. ACD600142
- cod. ACD600143 - cod. ACD600144 - cod. ACD600145
- cod. ACD600146

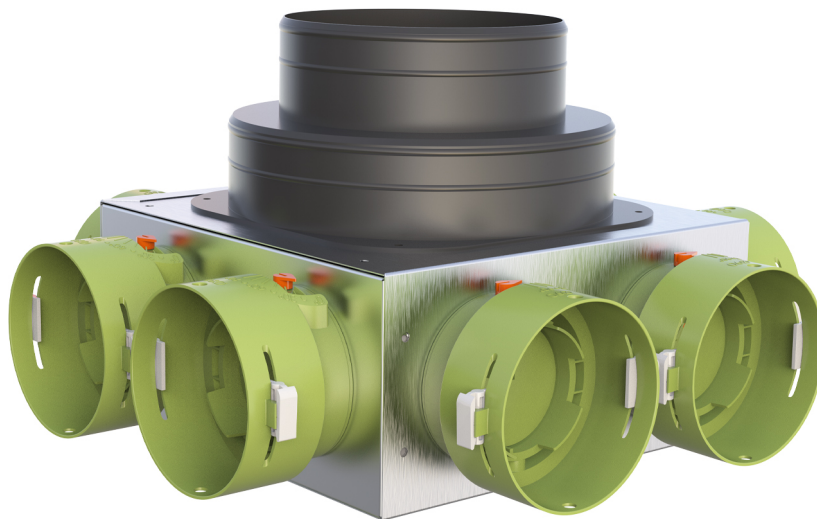


DESCRIPTION

Distribution box for VMC in galvanised steel sheet insulated internally in polyethylene (3 mm thick), designed for use with flexible ducted hoses.

The box is equipped with an inlet collar for Ø150 or Ø200 pipes and pre-mounted Ø75 or Ø90 outlet collars complete with screwdriver-adjustable calibration damper.

Closing caps supplied for models with 4/6/10 outlets.


On request available with collar Ø100 / Ø125 / Ø150.

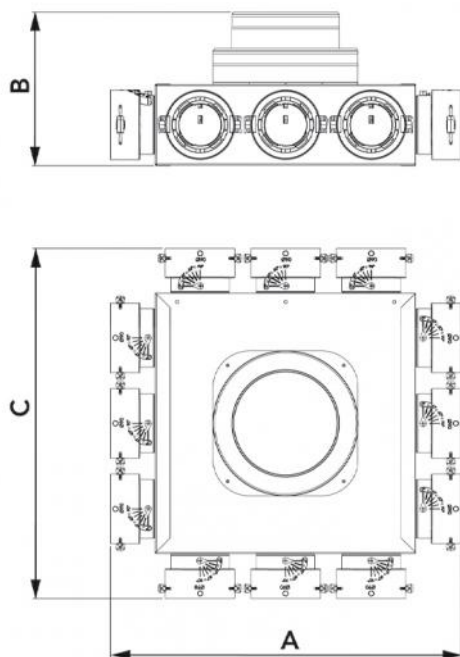


DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	INPUT Ø [mm]	No.of OUTLETS - Ø [mm]
ACD600137	234	212	355	150 / 200	4 - 90
ACD600138	300	212	355	150 / 200	6 - 90
ACD600139	355	212	355	150 / 200	8 - 90
ACD600140	473	212	473	150 / 200	10 - 90
ACD600141	473	212	473	150 / 200	12 - 90
ACD600142	244	212	365	150 / 200	4 - 75
ACD600143	305	212	365	150 / 200	6 - 75
ACD600144	365	212	365	150 / 200	8 - 75
ACD600145	483	212	483	150 / 200	10 - 75
ACD600146	483	212	483	150 / 200	12 - 75

LOAD LOSS DIAGRAM

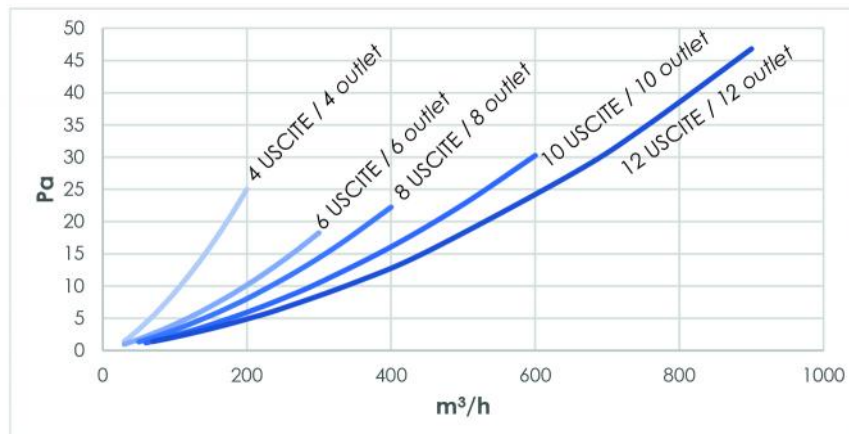

DAMPER ADJUSTMENT

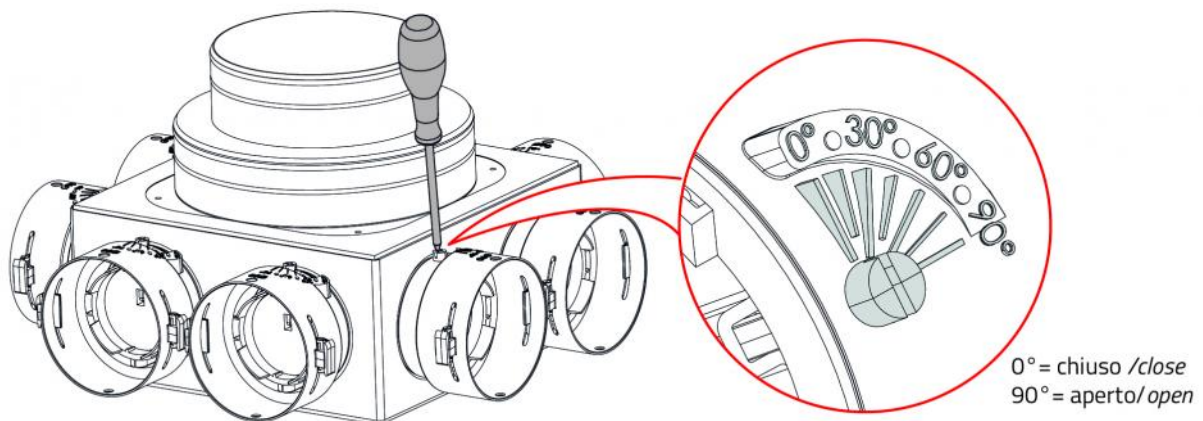

ITEMS

CODE	DESCRIPTION
ACD600137	PLÉNUM 90° Ø 90 - 4 OUTLETS 150/200
ACD600138	PLÉNUM 90° Ø 90 - 6 OUTLETS 150/200
ACD600139	PLÉNUM 90° Ø 90 - 8 OUTLETS 150/200
ACD600140	PLÉNUM 90° Ø 90 - 10 OUTLETS 150/200
ACD600141	PLÉNUM 90° Ø 90 - 12 OUTLETS 150/200
ACD600142	PLÉNUM 90° Ø 75 - 4 OUTLETS 150/200
ACD600143	PLÉNUM 90° Ø 75 - 6 OUTLETS 150/200
ACD600144	INSULATED METAL SHEET DISTRIBUTION BOX 90° DIAM. 75 - 8 OUTPUTS INPUT 150/200 TS FITTING
ACD600145	PLÉNUM 90° Ø 75 - 10 OUTLETS 150/200
ACD600146	PLÉNUM 90° Ø 75 - 12 OUTLETS 150/200

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.