


# Watertight rivet diameter 4x13

- cod. 11111026 - cod. FVD600023BOX



## DIMENSIONS

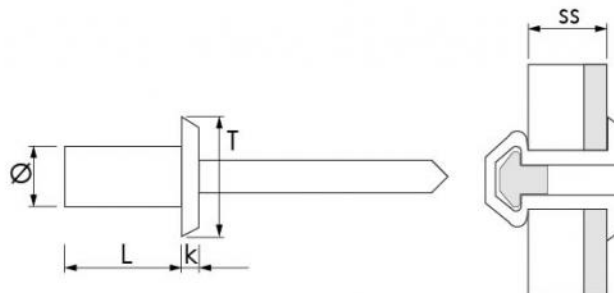

## DESCRIPTION

Aluminium blind rivet with steel nail and round head suitable for use in applications requiring watertight sealing, such as solar panels.

## COMPATIBILITÀ CON I MATERIALI DA ASSEMBLARE

MONEL	Stainless steel	COPPER	STEEL	ALUMINIUM	Cadmium	ZINCO
Mild corrosion from contact	Marked corrosion from contact	Not recommended use	Marked corrosion from contact		RECOMMENDED:	

## TECHNICAL SPECIFICATIONS

TECHNICAL DATA	
Hole diameter	Ø 4,1
Rivet diameter	Ø 4
Head width (T)	8 mm
Rivet length (L)	13mm
Head thickness (k)	1,3 mm
Shear breaking load	1500 N
Tensile strength	2100 N
Clampable thickness (ss)	6,5 ÷ 8,00 mm
body material	aluminium
Nail material	steel
Head type	round

## ITEMS

CODE	DESCRIPTION
11111026	SEALED HEAD RIVET 4 X 13
FVD600023BOX	WATERTIGHT RIVET Ø4x13 - BOX 100 pcs.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.