


Linear diffuser with rotary deflector, double slot, in matte white painted aluminum.

- cod. PWC300064 - cod. PWC300065 - cod. PWC300066
- cod. PWC300067 - cod. PWC300068



DESCRIPTION

Linear diffusers with 2 slots in extruded or matte white-painted aluminum, with adjustable polypropylene deflectors. They can be installed either on the ceiling or wall, with an installation height of 2.6 m to 4 m. Fastening is ensured by the front screws, (supplied).

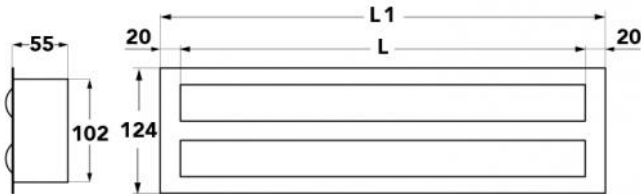

DIMENSIONS

CODE	L [mm]	L1 [mm]	AIR FLOW MIN / MAX (m³/h)
PWC300064	600	640	114 / 252
PWC300065	800	840	152 / 336
PWC300066	1000	1040	190 / 420
PWC300067	1500	1540	285 / 630
PWC300068	2000	2040	380 / 840

TECHNICAL DATA

	L	Ak [m²]	Q [m³/h] MIN	Q [m³/h] MAX	LwA [dB(A)] MIN	LwA [dB(A)] MAX	X(0.25) - Y(0.25) MIN [m]	X(0.25) - Y(0.25) MAX [m]	Dpt [Pa] MIN	Dpt [Pa] MAX
PWC300064	600	0.0156	114	252	24	45	4.1	9.1	10	50
PWC300065	800	0.0208	152	336	24	45	4.1	9.1	10	50
PWC300066	1000	0.026	190	420	24	45	4.1	9.1	10	50
PWC300067	1500	0.039	285	630	24	45	4.1	9.1	10	50
PWC300068	2000	0.052	380	840	24	45	4.1	9.1	10	50

ITEMS

CODE	DESCRIPTION
PWC300064	
PWC300065	
PWC300066	
PWC300067	
PWC300068	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.