


# Linear diffuser with rotary deflector, single slot, in matte white painted aluminum.

- cod. PWC300059 - cod. PWC300060 - cod. PWC300061  
- cod. PWC300062 - cod. PWC300063



## DESCRIPTION

Linear diffusers with a single slot in extruded or white-painted aluminum, with adjustable polypropylene deflectors. They can be installed either on the ceiling or wall, with an installation height of 2.6 m to 4 m. Fastening is ensured by the front screws, (supplied).

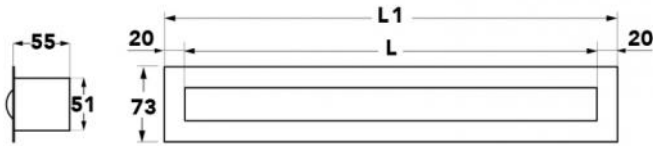

## DIMENSIONS

CODE	L [mm]	L1 [mm]	AIR FLOW MIN / MAX (m³/h)
PWC300059	600	640	48 / 132
PWC300060	800	840	64 / 176
PWC300061	1000	1040	80 / 220
PWC300062	1500	1540	120 / 330
PWC300063	2000	2040	160 / 440

## TECHNICAL DATA

CODE	L	Ak [m²]	Q [m³/h] MIN	Q [m³/h] MAX	LwA [dB(A)] MIN	LwA [dB(A)] MAX	X(0.25) - Y(0.25) MIN [m]	X(0.25) - Y(0.25) MAX [m]	Dpt [Pa] MIN	Dpt [Pa] MAX
PWC300059	600	0.0078	48	132	0	43	3	7.4	10	50
PWC300060	800	0.0104	64	176	0	43	3	7.4	10	50
PWC300061	1000	0.013	80	220	0	43	3	7.4	10	50
PWC300062	1500	0.0195	120	330	0	43	3	7.4	10	50
PWC300063	2000	0.026	160	440	0	43	3	7.4	10	50

**ITEMS**

CODE	DESCRIPTION
PWC300059	
PWC300060	
PWC300061	
PWC300062	
PWC300063	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.