


POLARIS 4X (WI-FI)

single control unit with communication protocols and Alexa app - Google Home

GAD100003




TECHNICAL SPECIFICATIONS:

- Power supply 230 V - 50/60 Hz
- 868 MHz RF data transmission to chronothermostat or via 4-pole cable
- RF signal range 50 m, wired signal range 100 m max between timed thermostat and control unit
- 3" backlit LCD display
- Membrane configuration keypad
- 1 output for ON/OFF management of ducting
- 1 output for ON/OFF management of dehumidification in floor cooling mode with SV
- Dimensions W 160 x D 90 x H 34 mm

FUNCTIONS

- Dehumidification management in floor cooling feature with EV
- Ready for window contact
- Arrangement for "ProAir" system control via voice command
- Wall mounted or DIN rail mounted
- 3 Inputs ON/OFF
- OUT1 and OUT2 outputs for the management of dampers, nozzles and relay module via 8-pole telephone cable with RJ45 connector plug
- Over 30 integrated communication protocols
- Wi-Fi module for use of "ProAir Multi-zone" app
- Bootloader feature that allows firmware update of the control unit
- 3 speeds management (via relay module)
- Menu available in 4 languages (Italian, English, German and French)

DIMENSIONS

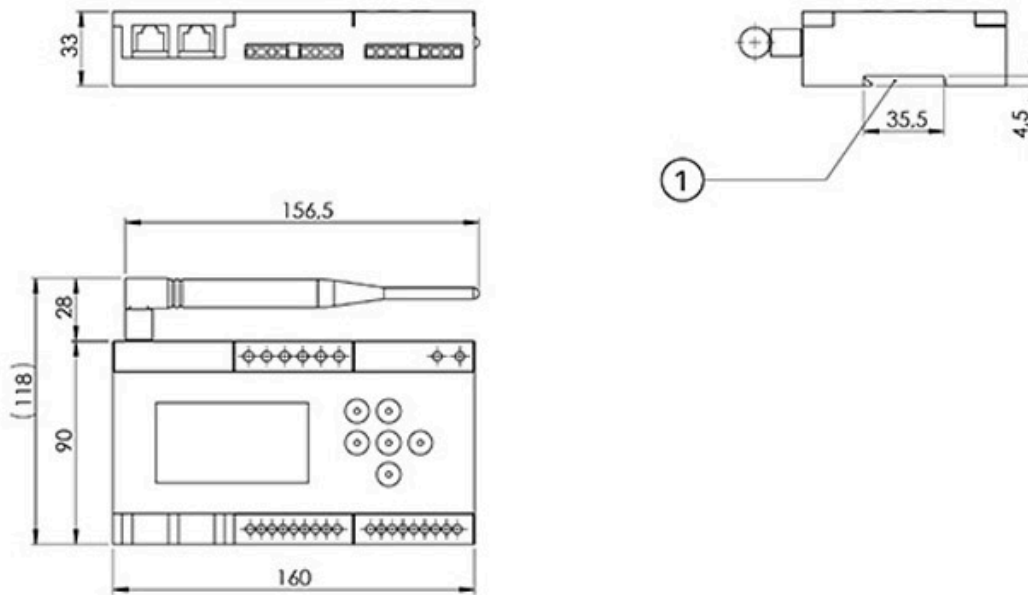

[1] Coupler for DIN IEC/EN60715 guides

ITEMS

CODE	DESCRIPTION
GAD100003	CONTROL UNIT WITH COMMUNICATION PROTOCOLS, APP - ALEXA GOOGLE HOME "POLARIS 4X" WI-FI